
A Division of Thiessen Products, Inc.

Instruction Sheet For Tool No. 97178-71

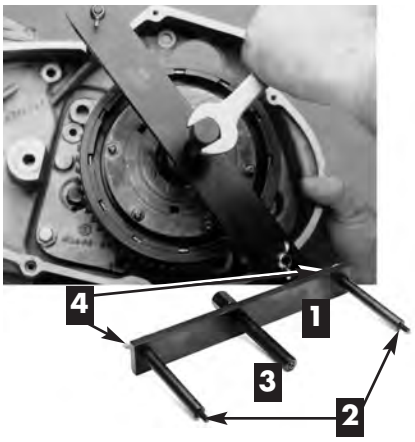

Clutch spring compressor
Use to remove and install clutch components
Use on Sportster 1971-84

Refer to H-D® Service Manual for specifications.

CAUTION: Be sure to disconnect battery ground cable.

1. Assemble tool as follows: With JIMS® laser marked name facing up on cross bar No. 1,slip the two 5/16 threaded ends of stud No. 2 through from the non-lasered side of bar, thread the wing nuts No.4 to the end of studs No. 2. Lube screw No. 3 and the middle hole in bar, thread screw from laser side of bar.
2. Hold complete tool up to clutch area with screw No. 3 in center of clutch hub.
3. Rotate bar until one of the two studs, No. 2, is near the 11:00 o'clock position, the other stud should be at the 4:00 o'clock position.
4. Screw in two studs all the way to the case, center screw No. 3 should be in the center of releasing disc collar (if not in center turn tool 180° and remount).
5. Screw in center screw No. 3 with a 3/4" wrench just enough to relieve spring pressure.

Caution: Wear safety glasses. Excessive force may damage Head or Guide !
See JIMS catalog for over 100 other top quality professional tools.


"Doing It Right... The JIMS® Way!"
555 Dawson Drive, Camarillo, CA 93012 • Phone 805-482-6913 • Fax 805-482-9224
visit us on the web at www.jimsusa.com

No.97178-IS

Rev B
1-17

A Division of Thiessen Products, Inc.

Instruction Sheet For Tool No. 97178-71

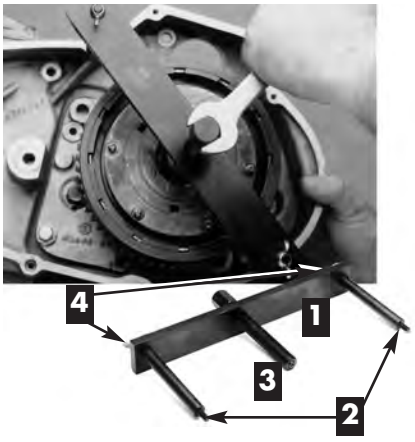

Clutch spring compressor
Use to remove and install clutch components
Use on Sportster 1971-84

Refer to H-D® Service Manual for specifications.

CAUTION: Be sure to disconnect battery ground cable.

1. Assemble tool as follows: With JIMS® laser marked name facing up on cross bar No. 1,slip the two 5/16 threaded ends of stud No. 2 through from the non-lasered side of bar, thread the wing nuts No.4 to the end of studs No. 2. Lube screw No. 3 and the middle hole in bar, thread screw from laser side of bar.
2. Hold complete tool up to clutch area with screw No. 3 in center of clutch hub.
3. Rotate bar until one of the two studs, No. 2, is near the 11:00 o'clock position, the other stud should be at the 4:00 o'clock position.
4. Screw in two studs all the way to the case, center screw No. 3 should be in the center of releasing disc collar (if not in center turn tool 180° and remount).
5. Screw in center screw No. 3 with a 3/4" wrench just enough to relieve spring pressure.

Caution: Wear safety glasses. Excessive force may damage Head or Guide !
See JIMS catalog for over 100 other top quality professional tools.

"Doing It Right... The JIMS® Way!"
555 Dawson Drive, Camarillo, CA 93012 • Phone 805-482-6913 • Fax 805-482-9224
visit us on the web at www.jimsusa.com