

CATALOG

VOLUME 34
ISSUE 1

**COKER
TIRE**[®]
Wheels Too!



*Tires &
Wheels For
Collectors &
Enthusiasts*



SHOP NOW!
Scan Code With
Phone Camera

Firestone

B.F. Goodrich

MICHELIN
CLASSIC

American Classic
collector realists



EXCELSIOR
VINTAGE TIRES

PHOENIX
RACE TIRES



**US
ROYAL
TIRES**

DUNLOP
TIRES

AVON
TIRES

VEDESTEIN

CRAGAR

SPECIALTY WHEEL
Authentic Steel Wheels



ROADSTER
WIRE WHEELS

SHOP ONLINE **COKERTIRE.COM** SPEAK TO AN EXPERT **800-959-1600**



WHY COKER?

Collector vehicle enthusiasts are faced with thousands of choices when it comes to buying tires and wheels. There are so many options that it can put even the savviest gearhead into a state of uncertainty. That's where Coker Tire steps in to provide authentic tires and wheels to accurately restore your classic car or perhaps give your hot rod the proper stance. Our company has been around since 1958, and we've had an intense focus on specialty tires and wheels since the 1970's. Our experience with tires and wheels is unmatched and we manufacture some of the most iconic tire and wheel designs in the world.

We strive to manufacture period correct bias ply tires, but we also offer modern radials. Coker Tire was the first to manufacture a wide whitewall radial tire, and the first to manufacture a bias look radial tire, offering customers with the best of both worlds. We've secured licensing agreements with Firestone, BFGoodrich and U.S. Royal to manufacture authentically branded tires that are true to the originals, aside from the fact that they are built with modern materials and machinery to ensure a safe and reliable tire for your collector vehicle.

In addition to these brands, we produce many other tires under our own branding, such as Coker Classic, American Classic, Excelsior and more! We're also

recommended distributors for brands such as Michelin, Vredestein and the famous BFGoodrich Radial T/A. No matter the brand, we take pride in our products and stand behind them with our Life of the Tread Warranty. You can also opt for our Extended Tire Protection or Extended Wheel Protection to take that warranty to the next level.

We're also proud to offer authentic wheels for a wide variety of applications, from restored originals to custom combinations and everything in between. As a bonus, we offer FREE mounting, balancing and nitrogen inflation when you order tires and wheels together.

We're dedicated to supplying the automotive world with the absolute best tires, wheels and accessories, designed specifically for collector vehicles. We're also dedicated to the continuation of the automotive hobby, by entering new markets and keeping constant communication with the folks who helped us become the world's largest manufacturer of tires and wheels for collector vehicles. Our relationships with the AACA, HCCA, AMCA and SEMA are valuable, but it's the relationships with each and every one of our customers that keep this company rolling. Take a moment to flip through our catalog to see our current offerings and reach out when you're ready—our knowledgeable staff will be here to serve you.



Contents

RADIAL TIRES

American Classic® Bias Look Radials	8-9
American Classic® Radials.....	10-11
Avon Radials	25
BFG All-Terrain K02	49
BFG® Radial T/A.....	17
BFG® Silvertown® Radials.....	14-16
Camac Radial	25
Coker Classic® Radials	12-13
Dunlop Radials	24
Excelsior® Stahl Sport Radial	23
Firestone® F560.....	22
Firestone Wide Oval® Radial.....	6-7
Michelin® Radials	18-21
Phoenix Radials	25
Travelstar Radials.....	24
Vredestein Radials	22

PERFORMANCE TIRES

Excelsior® Racing Tires.....	36
Firestone® Dirt Track Tires.....	32
Firestone® Dragster.....	33
Firestone® Indy Tires.....	33
M&H™ Drag Racing Tires	56-57
Michelin® TRX, TB5 & TB15 Rally Tires	21
Phoenix™ Drag Racing® Tires	54-55
Pro-Trac® Performance Tires.....	44

BIAS PLY TIRES

B.F.Goodrich® Vintage Tires.....	34-37
Coker Classic Golf Cart Tire	45
Coker Classic® Tires.....	43
Economy Model A Tires	45
Ensign.....	45
Excelsior® Vintage Tires	37
Firestone® Clincher	30
Firestone® Military Tires.....	48

Firestone® Balloon Tires.....	30
Firestone® Vintage Tires.....	26-29
Firestone Wide Ovals®	31
Goodrich Silvertown® Cords.....	34
Hartford™ Vintage Airplane Tires.....	45
Michelin® Vintage Tires	21
Premium Sport.....	44
Snowbird Model A Tires.....	45
U.S. Royal® Tires	42
Vintage Truck Tires.....	46-47

MOTORCYCLE & SCOOTER TIRES

Cushman™ Scooter Tires.....	53
Firestone Motorrrcycle Tires	50
Vintage Motorcycle Tires.....	51-52

WHEELS & RIMS

Buffalo Style Wire Wheels.....	71
Corvette Knockoff Aluminum Wheels.....	73
Cragar® Wheels.....	72
Dayton Wire Wheels™.....	70
Powder Coating Color Chart.....	67
Roadster Wire Wheels™.....	74-76
Specialty Wheel™ Steel Wheels.....	58-69
Tubes, Flaps, Rimstrips.....	79
Valve Stem Hardware.....	78
Vintage Rims.....	77
Wheel Reference.....	79

INFORMATION & REFERENCES

Contact Info.....	87
Cross Reference For Tire Sizes	3
Important Tire Info	84
Ordering & Shipping Info.....	85
Tire Size Index.....	80-83
Tire & Wheel Protection	87

CROSS REFERENCE FOR TIRE SIZES

PRE - 1964	65 TO '72	80 SERIES METRIC	ALPHA NUMERIC 78 SERIES	ALPHA NUMERIC 70 SERIES	P-METRIC 75 SERIES RADIAL	P-METRIC 70 SERIES RADIAL	REC. RIM WIDTHS
520-12	-	125-12	-	-	P125/75R12	-	4-5
520-13	560-13	155-13	-	-	P155/75R13	P155/70R13	4-5
590-13	600-13	165-13	A78-13	-	P165/75R13	P175/70R13	4-5
640-13	650-13	175-13	B78-13	-	P175/75R13	P185/70R13	4-6
725-13	700-13	185-13	D78-13	-	P185/75R13	P205/70R13	4-6
590-14	645-14	155-14	B78-14	-	P175/75R14	P185/70R14	4-6
650-14	695-14	175-14	C78-14	-	P185/75R14	P195/70R14	4-6
700-14	735-14	185-14	E78-14	E70-14	P195/75R14	P205/70R14	4-6
750-14	775-14	195-14	F78-14	F70-14	P205/75R14	P215/70R14	4-6
800-14	825-14	205-14	G78-14	G70-14	P215/75R14	P225/70R14	5-7
850-14	855-14	215-14	H78-14	-	P225/75R14	P235/70R14	5-7
590-15	600-15	165-15	A78-15	-	P165/75R15	P175/70R15	4-5
640-15	685-15	175-15	C78-15	-	P175/75R15	P185/70R15	5-6
650-15	735-15	185-15	E78-15	E70-15	P195/75R15	P205/70R15	5-6
670-15	775-15	195-15	F78-15	F70-15	P205/75R15	P215/70R15	5-7
710-15	825-15	205-15	G78-15	G70-15	P215/75R15	P225/70R15	6-8
760-15	855-15	215-15	H78-15	H70-15	P225/75R15	P235/70R15	6-8
800-15	885-15	230-15	J78-15	K70-15	P235/75R15	P235/70R15	6-8

This chart does NOT imply interchangeability. It is not always possible to interchange sizes due to differences in load rating, tire dimensions, vehicle wheel well and suspension parts clearances, and rim size. Never mix tires of different size or construction on the same axle.



TRADITIONAL WHITEWALL WIDTHS FOR AUTOMOBILES

PRE-1954	3" Whitewall or More
'54 thru '56	> 2 1/2" - 2 11/16" Whitewall
'57 thru '61	> 2 1/4" - 2 1/2" Whitewall
'62 thru '64	> 1" Whitewall or Less

Although whitewall widths have always varied from brand to brand the above reference is a general rule of thumb.



1950 Chevrolet 3100
Tires: American Classic Bias Look
710R15 WW

VINTAGE LOOK, RADIAL RIDE!

Coker Tire Has The Greatest Selection Of
Authentic Bias Look Radials

Our Bias Look Tires Offer The Appearance of a Vintage Bias Ply Tire with the Ride Quality of a Modern Radial.

Way back in the early 1990's, we had the wild idea to build a modern radial tire with a wide whitewall. It was well received in the automotive hobby, as bias ply tires were previously the only option for anything wider than a one-inch whitewall. Our goal was to manufacture a tire that offered the vintage style

sidewall with the ride quality, tread wear and safety that comes with radial construction. We've come a long way since then, and we've expanded product lines, added new brands and discovered new technology in an effort to create modern tires that do not distract from your car's classic appearance.

We took it one step further in 2013, with the introduction of the American Classic "Bias Look Radial", a tire that not only has a wide whitewall, but also has the shape profile and design of a bias ply tire. This tire opened the door for many new

designs, which we have rolled out over the past several years. This includes an additional expansion to the nostalgia radial product lines with the American Classic Model A+ Radial, and there are many new products on the horizon. For now, we want to showcase our wide range of radial tires that feature the appearance of a vintage tire. These tires offer direct fitment for passenger cars and light trucks from 1928 through 1974 and beyond, so take a look at our radial tire selection and decide what's right for your collector vehicle.



American Classic Model A+ Radial

Targeting the Ford Model A enthusiast, we designed the American Classic Model A+ Radial to be a direct replacement for original-style bias ply tires. This product line is available in blackwall and wide whitewall, and it's available to fit 19- and 21-inch wheels, which covers all four years of the popular Model A, as well as other makes and models from the era. This tire features a classic tread pattern and it fits on original Model A wheels or our high-quality reproductions. It's a perfect fit for the enthusiast who wants to get out and drive with the comfort of a modern radial. You can find them on Page 9.



EXCELSIOR
VINTAGE TIRES



Excelsior Stahl Sport Radial

For enthusiasts looking for some European racing influence, the Excelsior Stahl Sport Radial is the perfect fit. We designed the Stahl Sport Radial to fit pre-World War II automobiles and light trucks, offering them in rim fitments from 16 to 21 inches. The narrow tread pattern and tall profile makes them a great choice for restored cars using stock or reproduction wheels, and the wide range of sizes makes them a favorite for hot rodders who want the race-inspired big-n-little look. These tires fit a range of vehicles from around 1928 through 1948. See all the sizes and information on page 23.



Coker Classic 16-inch Radial

The Coker Classic 16-inch radial was our first tire that combined modern radial construction with bias ply style sizing, making it easy for customers to cross reference the original size for their vehicle. This tire blurs the line between bias ply and radial, thanks to a squared-off shoulder, narrow tread pattern and tall sidewall. These tires offer direct fitment for cars built from 1936 through 1948, as well as light trucks through the mid 1950's. Coker Classic 16-inch radials are available in blackwall and wide whitewall, and the five available sizes gives hot rodders plenty of options for big-n-little combinations. Pages 12 and 13 provide additional information on this very popular product line.



American Classic Bias Look Radial

Debuted at the 2013 SEMA Show, this tire racked up some major industry awards and proved the concept as one of our best-selling products. The American Classic Bias Look Radial is available in nine sizes to fit 13-, 14- and 15-inch wheels, fitting cars built from 1949 through the mid 1960's. The tires feature radial construction, and a vintage bias ply appearance that fools even the most seasoned car enthusiasts. The American Classic Bias Look Radial is available in nine sizes in blackwall and wide whitewall, and four sizes with a one-inch whitewall for your early 1960's classic car. Check them out on page 8 and 9.



Firestone Wide Oval Radial



Continuing the timeline of tire technology, 1967 saw the introduction of Firestone Wide Oval tires. While these tires featured a shorter sidewall and wider tread than its predecessors, it still lacked the comfortable ride quality of a radial tire until 2016, when we rolled out the Firestone Wide Oval Radial. This product line features authentic sidewall markings and tread styling, but the radial construction provides an instant improvement in ride quality, handling and traction. Available with a redline or raised white letters, you won't find a better tire for your muscle car. You'll find more information on this revolutionary tire at pages 6 and 7.





1970 Chevrolet Corvette Tires: Firestone Wide Oval FR70-15



Authentic Muscle Car Styling with Modern Radial Construction

The Firestone Wide Oval Radial is a revolutionary tire that we introduced as an upgrade to the original bias ply version of this famous muscle car tire. This tire offers direct fitment for cars built from 1967 through 1974 and beyond! You can expect an immediate difference in handling, compared to bias ply tires.



SHOP NOW!
Scan Code With
Phone Camera

Raised White Letter

TIRE SIZE	SIDEWALL	RIM WIDTHS	CONSTRUCTION	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #
FR70-14	RWL	6-7	POLY/STEEL	1500@32PSI	6.70	8.20	26.40	54880
GR70-14	RWL	6.5-7	POLY/STEEL	1620@32PSI	6.90	8.70	27.00	55280
FR70-15	RWL	5.5-8	POLY/STEEL	1500@32PSI	6.50	8.20	27.10	62490
FR60-15	RWL	7-8	POLY/STEEL	1500@32PSI	8.80	9.10	26.10	62510
GR70-15	RWL	5.5-8	POLY/STEEL	1620@32PSI	6.70	8.40	27.70	62680

Redline

TIRE SIZE	SIDEWALL	RIM WIDTHS	CONSTRUCTION	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #
FR70-14	REDLINE	6-7	POLY/STEEL	1500@32PSI	6.70	8.20	26.40	54890
GR70-14	REDLINE	6.5-7	POLY/STEEL	1620@32PSI	6.90	8.70	27.00	55290
FR70-15	REDLINE	5.5-8	POLY/STEEL	1500@32PSI	6.50	8.20	27.10	62500
GR70-15	REDLINE	5.5-8	POLY/STEEL	1620@32PSI	6.70	8.40	27.70	62690

Note: Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation. Tubeless Tires. These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.



★★★★★★★★★★ collector radials ★★★★★

World's First Bias Look Radials!

1955 Chevrolet Nomad Tires: American Classic Bias Look Radial 670R15

Bias Look Radial

TIRE SIZE	PHOTO	WHITE-WALL WIDTH	RIM WIDTHS	CONSTRUCTION	LOAD / SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WHITEWALL ITEM #	BLACKWALL ITEM #
650R13	A	2 1/4	4.5-5	POLY/STEEL	85S	1150@35PSI	4.40	6.30	24.80	700300	700309
750R14	A	2 1/4	5-6	POLY/STEEL	94S	1500@35PSI	4.80	7.60	27.30	700301	700310
750R14	A	1	5-6	POLY/STEEL	94S	1500@35PSI	4.80	7.60	27.30	700318	-
800R14	A	2 1/4	5-6	POLY/STEEL	97S	1620@35PSI	4.80	8.00	27.80	700302	700311
800R14	B	1	5-6	POLY/STEEL	97S	1620@35PSI	4.80	8.00	27.80	700319	-
560R15	A	2	4.5-5	POLY/STEEL	79S	970@35PSI	3.70	5.70	25.60	700308	700317
670R15	A	2 3/4	4.5-6	POLY/STEEL	93S	1450@35PSI	4.50	6.60	28.50	700303	700312
670R15	B	1	4.5-6	POLY/STEEL	93S	1450@35PSI	4.50	6.60	28.50	700320	-
710R15	A	2 3/4	5-6	POLY/STEEL	95S	1550@35PSI	4.60	7.10	28.50	700307	700316
760R15	A	3 1/4	5.5-6	POLY/STEEL	99S	1710@35PSI	4.35	7.60	29.80	700304	700313

bias look radial (cont.)

800R15	A	3 1/4	6-6.5	POLY/STEEL	100S	1800@35PSI	4.90	8.00	29.50	700305	700314
820R15	A	3 1/4	6-7	POLY/STEEL	102S	1920@35PSI	5.20	8.20	30.10	700306	700315
820R15	B	1	6-7	POLY/STEEL	102S	1920@35PSI	5.20	8.20	30.10	700321	-

Model A-Plus Radial

TIRE SIZE	PHOTO	WHITE-WALL WIDTH	RIM WIDTHS	CONSTRUCTION	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WHITE-WALL ITEM #	BLACK-WALL ITEM #	TUBE ITEM #
475/500R19	C	2 1/2	2.5-3.5	POLY/STEEL	895@35PSI	3.75	5.50	30.00	700325	700326	86400
440/450R21	C	2 1/2	2.5-3.5	POLY/STEEL	800@35PSI	3.50	4.50	31.70	700327	700328	87000

Note: UTQG RATING OF 400BB. U.S. DOT Approved. Whitewall Widths can vary depending on rim coverage. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation. Tubeless Tires. These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.

The American Classic is the world's first radial tire with a vintage bias ply appearance! This product line offers fitments from 1928 through the mid 1960's, with several size and sidewall options to fit your needs. Enjoy a smooth ride, and the reliability of a tubeless, steel-belted radial construction.



SHOP NOW!
Scan Code With
Phone Camera



1960 CHRYSLER 300F
Tires: American Classic Radial 235/75R14



★★★★★★★ collector radials ★★★★★

Classic Tread Design
And Smooth Sidewall

If you're looking for a classic tread pattern and modern handling, this line of radials is the perfect choice. With many sizes to fit 14- through 17-inch wheels, and you'll find the right fitment for your classic or modern ride in this versatile product line.



SHOP NOW!
Scan Code With
Phone Camera

Wide Whitewall Radials

TIRE SIZE	PHOTO	WHITEWALL WIDTH	RIM WIDTHS	CONSTRUCTION	LOAD/ SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #
P205/75R14	A	2 3/8	5.5-7.5	POLY/STEEL	95S	1532@35PSI	5.55	8.30	26.00	530295
P215/75R14	A	2 1/2	5.5-7.5	POLY/STEEL	98S	1664@35PSI	5.68	8.50	26.69	530299
P235/75R14	A	2 1/2	6-8.5	POLY/STEEL	104S	1930@35PSI	6.30	9.25	27.87	54701
165R15	A	2 1/4	4.5-6	POLY/STEEL	86S	1168@35PSI	4.62	6.50	25.25	579817
P185/55R15	E	1 5/8	5.5-6	POLY/STEEL	82H	1047@36PSI	6.04	7.64	23.06	530286
P195/75R15	A	2 1/4	5-7	POLY/STEEL	94S	1477@35PSI	5.6	7.72	26.5	530310
P205/75R15	A	2 1/2	5.5-7.5	POLY/STEEL	96S	1598@35PSI	5.68	8.3	27.00	530350
P215/75R15	A	2 5/8	5.5-7.5	POLY/STEEL	100S	1742@35PSI	6.24	8.50	27.60	587030
P225/75R15	A	2 3/4	6-8	POLY/STEEL	102S	1874@35PSI	6.52	8.90	28.29	587031
P235/75R15	A	3	6-8.5	POLY/STEEL	104S	2028@35PSI	6.72	9.25	28.8	629600
P205/70R15	A	2	5.5-7.5	POLY/STEEL	94S	1499@35PSI	6	8.3	26.00	530294
P215/70R16	A	2	5.5-7.5	POLY/STEEL	99S	1709@35PSI	6.42	8.90	27.60	579800
P235/70R16	A	2 3/8	6-8.5	POLY/STEEL	104S	1984@35PSI	7.08	9.50	28.80	629990
P205/60R15*	C	2	5.5-7.5	POLY/STEEL	90S	1301@35PSI	6.5	8.23	24.69	530296
P205/55R16*	C	1 1/2	5.5-7.5	POLY/STEEL	89S	1279@35PSI	6.50	8.43	24.88	530297
P215/60R15	E	2	5.5-7.5	POLY/STEEL	93H	1411@35PSI	6.80	8.7	25.16	5797655
P205/60R16	E	1 1/2	5.5-7.5	POLY/STEEL	91H	1356@35PSI	6.50	8.23	25.67	6764302
P215/55R16	E	1 1/2	5.5-7.5	POLY/STEEL	91H	1190@35PSI	7.10	8.9	25.28	6764311
P235/60R16	E	2 1/8	6-8.5	POLY/STEEL	99H	1709@35PSI	7.20	9.45	27.09	6764341
P235/60R16	E	3/8	6-8.5	POLY/STEEL	99H	1709@35PSI	7.20	9.45	27.09	6764338
P235/55R17	E	1 3/4	6-8.5	POLY/STEEL	98H	1653@35PSI	6.70	9.65	27.17	6880832

Low Profile Redline & Goldline Radials

TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	CONSTRUCTION	LOAD/ SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #
P215/60R15	D	3/8 REDLINE	5.5-7.5	POLY/STEEL	93H	1411@35PSI	6.80	8.70	25.16	5797658
P215/55R16	D	3/8 REDLINE	5.5-7.5	POLY/STEEL	91H	1190@35PSI	7.10	8.90	25.28	6764310
P235/60R16	D	3/8 REDLINE	6-8.5	POLY/STEEL	99H	1709@35PSI	7.20	9.45	27.09	6764340
P235/55R17	D	3/8 REDLINE	6-8.5	POLY/STEEL	98H	1653@35PSI	6.70	9.65	27.17	6880831
P235/55R17	F	3/8 GOLDLINE	6-8.5	POLY/STEEL	98H	1653@35PSI	6.70	9.65	27.17	6880830

Narrow Whitewall Radials

TIRE SIZE	PHOTO	WHITEWALL WIDTH	RIM WIDTHS	CONSTRUCTION	LOAD/ SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #
165R15	B	3/4	4.5-6	POLY/STEEL	86S	1168@35PSI	4.62	6.50	25.25	579816
P205/75R14	B	1	5.5-7.5	POLY/STEEL	95S	1532@35PSI	5.55	8.30	26.00	700200
P215/75R14	B	1	5.5-7.5	POLY/STEEL	98S	1664@35PSI	5.68	8.50	26.69	700202
P235/75R14	B	1	6-8.5	POLY/STEEL	104S	1930@35PSI	6.30	9.25	27.87	547010
P195/75R15	B	3/4	3/4	POLY/STEEL	94S	1444@35PSI	5.60	7.72	26.50	568760
P205/75R15	B	1	5.5-7.5	POLY/STEEL	96S	1598@35PSI	5.68	8.30	27.00	700205
P215/75R15	B	1.3	5.5-7.5	POLY/STEEL	100S	1742@35PSI	6.24	8.90	27.60	700210
P225/75R15	B	1.6	6-8	POLY/STEEL	102S	1874@35PSI	6.52	9.05	28.31	700215
P235/75R15	B	1.6	6-8.5	POLY/STEEL	104S	2028@35PSI	6.72	9.25	28.80	700219

Note: UTQG RATING of 540 BB. Tread pattern may vary from what is pictured. Tubeless Tires, U.S. DOT and European ECE Approved. Whitewall Widths can vary depending on rim coverage. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation.





World's First Radial Whitewall!

Coker Classic radial tires offer direct fitment for a wide range of vehicles, ranging from classic Cadillacs, early Fords and even Triumph TR6. Included in this line is the 16-inch Bias Profile Radial, a tire made famous by its direct fitments on Pre WWII Fords, Packards and more!



SHOP NOW!
Scan Code With
Phone Camera



Wide Whitewall Radial

TIRE SIZE	PHOTO	WHITEWALL WIDTH	RIM WIDTHS	CONSTRUCTION	LOAD/SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #
P195/75R14	A	2 1/4	5-7	POLY/STEEL	92P	1400@35PSI	5.48	7.96	25.51	526055
P205/75R14	A	2 3/8	5.5-7.5	POLY/STEEL	97P	1532@35PSI	5.68	8.14	26.11	530300
P215/75R14	A	2 1/2	5.5-7.5	POLY/STEEL	100P	1664@35PSI	5.68	8.25	27.11	538900
P225/75R14	A	2 1/2	6-8	POLY/STEEL	102P	1797@35PSI	6.04	8.78	27.62	546090
165R15	A	2 1/4	4.5-6	POLY/STEEL	86S	1168@35PSI	4.62	6.50	25.25	568745
P205/75R15	A	2 3/8	5.5-7.5	POLY/STEEL	97P	1598@35PSI	5.68	8.14	27.11	579400
P215/75R15	A	2 1/2	5.5-7.5	POLY/STEEL	100P	1742@35PSI	6.04	8.63	27.62	587050
P225/75R15	A	2 3/4	6-8	POLY/STEEL	102P	1874@35PSI	6.24	8.95	28.29	597020
P235/75R15	A	3 1/8	6-8.5	POLY/STEEL	105P	2028@35PSI	6.58	9.41	28.91	629700

* UTQG RATING of 550 BB.

Redline Radial

185R15	B	3/8 RED	5-6.5	POLY/STEEL	91S	1355@35PSI	4.75	7.28	27.00	5798w6
--------	---	---------	-------	------------	-----	------------	------	------	-------	--------

* UTQG RATING of 550 BB.

16" Bias Profile Radial

TIRE SIZE	PHOTO	WW WIDTH	RIM WIDTHS	CONSTRUCT.	LOAD/SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BLACK-WALL ITEM #	TUBE ITEM #
550R16	C	2 3/4	3.25-4	POLY/STEEL	91P	1355@41PSI	4.53	5.25	26.88	64309	64308	85640
600R16	C	3	4-5	POLY/STEEL	95P	1520@41PSI	5.00	6.25	28.36	62239	62238	85640
650R16	C	3 1/4	4-5	POLY/STEEL	99P	1710@41PSI	5.40	6.80	29.26	62243	62242	85640
700R16	C	3 1/2	4-5	POLY/STEEL	102P	1875@41PSI	5.85	7.35	30.18	62245	62244	85372
750R16	C	4	5-6	POLY/STEEL	107P	2150@41PSI	6.40	8.00	31.14	62247	62246	85372

* UTQG RATING of 400 BB. •Load Range C, Tube Type

Note: Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation. Coker Classic radial tires are designed for pre-1976 vehicles and have modern aspect ratios, interchangeability is not implied nor always possible because of rim widths, wheel well clearance or speed and load ratings required. It is very important to maintain proper inflation pressure (35 psi MINIMUM...41 psi on 16 inch radials) on Coker Classic radial tires. Vehicles designed for bias ply tires may drive considerably different with radial ply tires, please use extreme caution. Older rims that were originally designed for bias-ply tires may crack if used with modern radial tires. Please use caution by inspecting your rims on a regular basis. Never mix bias and radial tires on the same vehicle, your vehicle may under steer or over steer uncontrollably. See "About Nostalgia Radials," page 80. Not for commercial use. When using tube, remove any foreign debris and inspection sticker from inside tire before installation.



Our exclusive BFGoodrich Silvertown Radial product line features a wide variety of sizes to fit classic cars, hot rods and customs. With smooth sidewalls and several great-looking tread options, you'll find the right look and fitment for your collector vehicle in this product line.

Silvertown Radial Whitewalls

TIRE SIZE	PHOTO	WW WIDTH	RECOMMENDED RIM WIDTHS	CONSTRUCTION	LOAD/SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #
P155/80R13*	A	2	4-5.5	POLY/STEEL	79S	959@35PSI	4.10	6.18	22.76	51202
P165/80R13*	A	2 1/4	4.5-6	POLY/STEEL	83S	1069@35PSI	5.00	6.50	23.39	579813
P175/80R13*	A	2 1/4	4.5-6	POLY/STEEL	86S	1179@35PSI	5.30	6.97	24.02	579834
P185/80R13*	A	2 7/8	5-6.5	POLY/STEEL	90S	1301@35PSI	5.10	7.20	24.70	579814
P185/70R13	B	2	5-6.5	POLY/STEEL	90S	1135@35PSI	5.40	7.44	23.23	512076
P195/70R13	B	7/16	5-6.5	POLY/STEEL	88S	1246@35PSI	5.6	7.72	23.78	579844
P185/70R14	B	2 1/4	5-6.5	POLY/STEEL	87S	1201@35PSI	5.90	7.44	24.25	579678
P205/75R14	A	2 3/8	5.5-7.5	POLY/STEEL	95S	1532@35PSI	5.80	8.00	26.10	530303
P215/70R14	B	2 1/4	5.5-7.5	POLY/STEEL	96S	1554@35PSI	6.40	8.70	25.90	555776
P215/70R14	D	3/8	5.5-7	POLY/STEEL	96S	1554@35PSI	6.40	8.70	25.90	555780
P225/70R14	B	2 3/4	6-8	POLY/STEEL	98S	1675@35PSI	6.70	8.90	26.30	546080
145R15	E	2 1/4	3.5-5	POLY/STEEL	77S	935@44PSI	4.0	5.60	24.25	579808
165R15*	C	3/4	4.5-6	POLY/STEEL	86S	1168@35PSI	4.60	6.50	25.20	579810
165R15*	E	2 1/4	4.5-6	POLY/STEEL	86S	1168@35PSI	4.60	6.50	25.20	579811
P205/75R15	A	2 3/8	5.5-7.5	POLY/STEEL	97S	1598@35PSI	5.80	8.00	27.10	579403
P215/75R15	A	2 1/2	5.5-7.5	POLY/STEEL	100S	1742@35PSI	6.10	8.50	27.70	538904
P225/75R15	A	2 3/4	6-8	POLY/STEEL	102S	1874@35PSI	6.30	8.80	28.30	579028
P235/75R15	A	2 7/8	6-8.5	POLY/STEEL	105S	2028@35PSI	6.60	9.30	28.90	629703
P195/60R15	C	1 3/4	5.5-7	POLY/STEEL	86S	1190@35PSI	5.55	7.91	23.78	5553007
P225/60R15	C	2 1/4	6-8	POLY/STEEL	95S	1521@35PSI	6.80	8.7	25.16	5797877
P185/70R15*	B	2 1/4	5-6.5	POLY/STEEL	89S	1257@35PSI	5.5	7.4	25.2	579680
P215/70R15	B	2 1/2	5.5-7.5	POLY/STEEL	97S	1620@35PSI	6.4	8.7	26.9	579760
P215/70R15	D	3/8	5.5-7.5	POLY/STEEL	97S	1620@35PSI	6.4	8.7	26.9	579764
P225/70R15	B	2 3/4	6-8	POLY/STEEL	100S	1753@35PSI	6.7	9	27.4	579785
P225/70R15	D	3/8	6-8	POLY/STEEL	100S	1753@35PSI	6.7	9	27.4	579787
P225/70R15	B	1 1/2	6-8	POLY/STEEL	100S	1753@35PSI	6.7	9	27.4	579788
P235/70R15	B	2 3/4	6-8.5	POLY/STEEL	102S	1896@35PSI	7	9.5	28	629970
P235/70R15	C	1 1/2	6-8.5	POLY/STEEL	100S	1896@35PSI	7	9.5	28	629973
P255/70R15*	B	3	6.5-9	POLY/STEEL	108S	2183@35PSI	7.6	10.2	29.1	630600

1956 Chevrolet Suburban
Tires: BF Goodrich Silvertown Radial Whitewalls
Front: 205/75R15
Rear: 225/75R15



TIRE SIZE	PHOTO	WW WIDTH	RECOMMENDED RIM WIDTHS	CONSTRUCTION	LOAD/SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #
P285/70R15	B	3 1/2	7.5-9.5	POLY/STEEL	115S	2679@35PSI	8.6	11.5	30.75	629710
P285/70R15	B	BLKWL	7.5-9.5	POLY/STEEL	115S	2679@35PSI	8.6	11.5	30.75	629711
P185/65R15	B	1 3/4	5-6.5	POLY/STEEL	86S	1168@35PSI	5.5	7.44	24.45	579605
P205/65R15	B	2	5.5-7.5	POLY/STEEL	92S	1400@35PSI	6.1	8.23	25.47	530285
P215/65R15	B	2	5.5-7.5	POLY/STEEL	95S	1510@35PSI	6.4	8.7	26.02	555755
P195/50R16	B	2	5-7	POLY/STEEL	83S	1074@35PSI	5.55	7.9	23.7	6764322
P215/65R16	B	2 1/4	5.5-7.5	POLY/STEEL	95S	1565@35PSI	6.4	8.7	27.01	555765
P225/60R16	D	3/8	6-8	POLY/STEEL	97S	1609@35PSI	6.9	8.7	26.6	6764319
P225/60R16	B	1 3/4	6-8	POLY/STEEL	97S	1609@35PSI	6.9	9	26.6	6764321
P275/65R16	B	2 7/8	6.5-9	POLY/STEEL	111S	2403@35PSI	8.0	11	30.1	6764323
P275/65R16	B	BLKWL	6.5-9	POLY/STEEL	111S	2403@35PSI	8.0	11	30.1	6764324
P225/55R17	F	1 1/2	6-9	POLY/STEEL	95S	1521@35PSI	6.8	8.7	26.7	6878510

Note: 60 Series, 65 Series, 70 Series and 80 Series have a UTQG RATING of 540 BB. 75 Series has a UTQG RATING of 520 BB. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation. WW = WHITEWALL.



SHOP NOW!
Scan Code With
Phone Camera





1966 Chevrolet Nova
Tires: BF Goodrich Silvertown
Redlines 205/70R14

BFGoodrich®
T/A® Tires

SHOP NOW!
Scan Code With
Phone Camera



Muscle Car Tires

With more than 50 years of history, the BFGoorich Radial T/A is one of the most popular muscle car tires of all time. You can expect excellent handling and tread wear from this modern radial tire, and of course the cool appearance of Raised White Letters.



Radial T/A

TIRE SIZE	RECOMMENDED RIM WIDTHS	CONSTRUCTION	LOAD/SPEED INDEX	MAX LOAD CAPACITY	SECTION WIDTH	OVERALL DIAMETER	ITEM #
P205/60R13	5.0-6.5	POLY/STEEL	86S	1179@35PSI	8.2	22.7	24740
P205/70R14	5.0-7.0	POLY/STEEL	93S	1433@35PSI	8.2	25.4	5556500
P215/60R14	6.0-7.5	POLY/STEEL	91S	1345@35PSI	8.7	24.2	5557782
P215/70R14	5.5-7.0	POLY/STEEL	96S	1554@35PSI	8.7	25.9	5557780
P225/60R14	6.0-8.0	POLY/STEEL	94S	1455@35PSI	9.0	24.7	5557788
P225/70R14	6.0-7.5	POLY/STEEL	98S	1675@35PSI	9.0	26.5	546075
P235/60R14	6.5-8.5	POLY/STEEL	96S	1565@35PSI	9.5	25.1	5557790
P245/60R14	7.0-8.5	POLY/STEEL	98S	1675@35PSI	9.8	25.6	5557792
P155/80R15	4.5-5.5	POLY/STEEL	83S	1069@35PSI	6.1	24.7	03325
P195/60R15	5.5-7.0	POLY/STEEL	87S	1190@35PSI	7.9	24.2	5553000
P205/60R15	5.5-7.5	POLY/STEEL	90S	1301@35PSI	8.2	24.7	24742
P215/60R15	6.0-7.5	POLY/STEEL	93S	1411@35PSI	8.7	25.2	5797659
P215/65R15	6.0-7.5	POLY/STEEL	95S	1510@35PSI	8.7	26.0	5797652
P215/70R15	5.5-7.0	POLY/STEEL	97S	1620@35PSI	8.7	26.9	5797650
P225/60R15	6.0-8.0	POLY/STEEL	95S	1521@35PSI	9.0	25.6	5797870
P225/70R15	6.0-7.5	POLY/STEEL	100S	1753@35PSI	9.0	27.4	5797860
P235/60R15	6.5-8.5	POLY/STEEL	98S	1642@35PSI	9.5	26.1	6299820
P235/70R15	6.0-8.0	POLY/STEEL	102S	1896@35PSI	9.5	28.0	6299800
P245/60R15	7.0-8.5	POLY/STEEL	100S	1753@35PSI	9.8	26.6	6305500
P255/60R15	7.0-9.0	POLY/STEEL	102S	1885@35PSI	10.2	27.1	6306500
P255/70R15	6.5-8.5	POLY/STEEL	108S	2183@35PSI	10.2	29.1	6306400
P275/60R15	7.5-9.5	POLY/STEEL	107S	2149@35PSI	11.0	28.0	6308000
P295/50R15	8.0-10.0	POLY/STEEL	105S	2061@35PSI	12.2	26.7	6308245



Silvertown Radial Redlines are the perfect upgrade for muscle cars from the 1960's. There is even a Dual Redline option for early Mustangs. With specific sizing and sidewall options, this is also a great choice for your classic Corvette!



SHOP NOW!
Scan Code With
Phone Camera

Silvertown Radial Redlines

TIRE SIZE	PHOTO	REDLINE WIDTH	RECOMMENDED RIM WIDTHS	CONSTRUCTION	LOAD/SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	REDLINE ITEM #
P185/70R13	D	3/8	5-6.5	POLY/STEEL	90S	1135@35PSI	5.40	7.44	23.23	512075
P205/75R14	B	3/8	5.5-7.5	POLY/STEEL	95S	1532@35PSI	5.80	8.00	26.10	530308
P205/70R14	C	3/8 DUAL	5.5-7.5	POLY/STEEL	93S	1433@35PSI	6.10	7.99	25.35	530293
P205/70R14	D	3/8	5.5-7.5	POLY/STEEL	93S	1433@35PSI	6.10	7.99	25.35	530290
P215/70R14	D	3/8	5.5-7.5	POLY/STEEL	96S	1554@35PSI	6.40	8.70	25.90	555778
P225/70R14	D	3/8	6-8	POLY/STEEL	98S	1675@35PSI	6.70	8.90	26.30	546082
P245/50R14	D	BW	6.5-9	POLY/STEEL	93S	1433@35PSI	9.00	9.96	23.70	548000
P265/50R14	D	BW	7-9.5	POLY/STEEL	98S	1642@35PSI	11.50	10.91	24.49	548050
P205/75R15	B	3/8	5.5-7.5	POLY/STEEL	97S	1598@35PSI	5.80	8.00	27.10	579702
P205/75R15	A	3/8 GOLD	5.5-7.5	POLY/STEEL	97S	1598@35PSI	5.80	8.00	27.10	579700
P215/70R15	D	3/8	5.5-7.5	POLY/STEEL	97S	1620@35PSI	6.40	8.70	26.90	579762
P225/70R15	D	3/8	6-8	POLY/STEEL	100S	1753@35PSI	6.70	9.00	27.40	579786
P235/70R15	D	3/8	6-8.5	POLY/STEEL	102S	1896@35PSI	7.00	9.50	28.00	629972
P185/65R15	D	3/8	5-6.5	POLY/STEEL	86S	1168@35PSI	5.50	7.44	24.45	579600
P205/65R15	D	3/8	5.5-7.5	POLY/STEEL	92S	1400@35PSI	6.10	8.23	25.47	530280
P215/65R15	D	3/8	5.5-7.5	POLY/STEEL	95S	1510@35PSI	6.40	8.70	26.02	555750
P215/65R16	D	3/8	5.5-7.5	POLY/STEEL	95S	1565@35PSI	6.40	8.70	27.01	555760
P225/60R16	D	3/8	6-8	POLY/STEEL	97S	1609@44PSI	6.90	8.90	26.60	6764320
P225/55R17	E	3/8	6-9	POLY/STEEL	95S	1521@35PSI	6.80	8.90	26.60	6878509

Note: 55 Series, 60 Series, 65 Series, 70 Series and 80 Series have a UTQG RATING of 540 BB. 75 Series has a UTQG RATING of 520 BB. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation. WW = WHITEWALL.



1967 Chevrolet Chevelle
Tires: BF Goodrich Radial T/A
Front: 225/70R15
Rear: 255/70R15





SPORT RADIALS

Coker Tire is the Exclusive North American distributor of Michelin Classic tires. With dozens of sizes and tread patterns, this is the ultimate selection of high-quality tires for vintage European cars, whether you're building a Ferrari or a Fiat or anything in between. Michelin manufactures these tires with authenticity in mind, so you won't find a better tire for your classic.



SHOP NOW!
Scan Code With
Phone Camera



1956 Jaguar XK 140
Tires: Michelin X Radials 185R16

TIRE SIZE	PHOTO	TREAD DESIGN	RIM DIAMETER	RIM WIDTHS	LOAD/SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
125R12	F	X	12	3-4	62S	5.19	20.39	51198	85112
145/70R12	B	XZX	12	3-4	69S	6.14	20.47	51199	85125
155HR13	E	XAS-FF	13	4-5.5	78H	6.2	23.0	51205	85324
165HR13	E	XAS-FF	13	4.5-6	82H	5.8	23.2	51206	85324
185/70VR13	H	XDX	13	5-6.5	86V	7.4	23.2	63100	85140
205/70VR13	H	XDX	13	5.5-7.5	91V	8.3	24.8	51250	85140
640SR13	D	ZX	13	4.5-5	87S	7.0	25.3	51030	85324
725R13	F	X	13	4.5-5.5	90S	7.1	25.7	51204	85140
155R14	F	X	14	4-5.5	82t	6.2	23.78	56038	85325
165HR14	E	XAS	14	4.5-6	84H	6.6	24.5	512866	85325
175HR14	E	XAS	14	4.5-6	88H	6.9	24.8	512865	85325
185R14	A	MXV-P	14	5-6.5	90H	7.4	25.6	629707	85335
185/70R14	E	XAS	14	4.5-6	88H	7.4	25.3	57983	85335
195/65VR14	K	MXV3-A	14	5.5-7	86V	7.9	24.1	556106	85335
195/60VR14	K	MXV3-A	14	5.5-7	86V	7.9	23.2	556105	85335
205/70VR14	G	XWX	14	5.5-7.5	89W	8.6	25.1	55570	85335
205VR14	G	XWX	14	5.5-7.5	89W	8.1	26.8	55575	85335
215/70VR14	G	XWX	14	5.5-7.5	92W	8.8	26.4	555773	85335
125R15	F	X	15	3.5-4.5	68S	4.7	23.2	55590	85360
135SR15	D	ZX	15	3.5-5	72S	5.0	23.5	55595	85360
145SR15	B	XZX	15	4-5	78S	5.6	24.3	56040	85361

Note: These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.

TIRE SIZE	PHOTO	TREAD DESIGN	RIM DIAMETER	RIM WIDTHS	LOAD/SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
155R15	F	X	15	4-5.5	82T	6.2	24.8	56039	85361
155HR15	E	XAS	15	4-5.5	82H	6.1	25.1	56051	85361
155HR15	E	XAS-FF	15	4-5.5	82H	6.1	25.1	56050	85361
165SR15	B	XZX	15	4.5-6	86S	6.4	25.4	57982	85361
165HR15	E	XAS	15	4.5-6	86H	6.3	25.6	579824	85361
180HR15	E	XAS	15	5-6.5	89H	6.9	26.8	57984	85361
185VR15	C	XVS	15	5-6.5	93V	7.4	26.5	57987	85364
185/70VR15	G	XWX	15	5-6.5	89V	7.7	25.5	57970	85364
185HR15	C	XVS-P	15	5-6.5	93H	7.2	25.6	579871	85364
205/70VR15	G	XWX	15	5.5-7.5	90W	8.3	26.5	57974	85364
215/70VR15	G	XWX	15	5.5-7.5	90W	9.2	27.0	57977	85364
225/70VR15	G	XWX	15	6-8	92W	9.1	27.9	57978	85365
235/70HR15	C	XVS	15	6-8.5	101H	9.3	28.0	63049	85365
255/45VR15	J	MXW	15	6.5-8	93W	10	24.1	63070	85365
185R16	F	X	16	4.5-6	92S	7.13	27.8	66250	85640
125R400	F	XSTOP	400mm	3.5-4.5	69S	4.7	24.4	631775	85360
135R400	F	XSTOP	400mm	3.5-5	73S	5.2	24.7	63178	85360
145R400	F	XSTOP	400mm	4-5	79S	5.6	25.6	631782	85360
155R400	F	XSTOP	400mm	4-5.5	83S	6.3	25.8	631785	85360
165R400	F	XSTOP	400mm	4.5-6	87S	6.4	26.6	63180	85640
185R400	F	XSTOP	400mm	5-6.5	91S	7.3	27.8	63189	85640
550R16	F	X	16	3.25-4	84H	6.2	27.2	64311	85360
600R16	I	PILOTE X	16	4-5	88W	7.1	27.8	66241	85640





SPORT RADIALS

The Michelin Classic product line now includes a series of whitewall tires, which feature the famous Michelin tread patterns, including XAS, XZX and more! Additionally, Michelin has added several new product lines to fit modern classics from the 1980's, 1990's and beyond.



SHOP NOW!
Scan Code With
Phone Camera

TIRE SIZE	PHOTO	TREAD DESIGN	WHITEWALL WIDTH (MM)	RIM DIAMETER	RIM WIDTHS	LOAD/SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	ITEM #
125R12	A	X	19.5	12	3-4	62S	5.00	20.39	511980
640SR13	B	ZX	48	13	4-5.5	87S	7.05	25.28	510300
725R13	A	X	50	13	5-6	90S	7.17	25.75	512040
125R15	A	X	27	15	3-4	68S	4.96	23.54	555900
165R15	C	XZX	27.5	15	4-5.5	86S	6.46	25.43	579823
165R400	A	X	50	400mm	4.5-6	87S	6.42	26.65	631800
185HR14	D	MXV	20	14	4.5-6.5	90H	7.64	25.59	629706
180HR15	E	XAS	44.5	15	4.5-5.5	89H	6.93	26.77	579840
185HR15	F	XVS	37.5	15	4.5-6	93H	7.28	26.54	579872
235/70HR15	F	XVS	20	15	6.5-8.5	101H	9.29	27.99	630490
175/65R13	G	Pilot Exalto PE2	N/A	13	5-6	80T	7.17	21.77	556107
175/60R13	G	Pilot Exalto PE2	N/A	13	5-6	77H	6.93	21.26	556108
185/60R13	G	Pilot Exalto PE2	N/A	13	5-6.5	80H	7.28	21.77	556109
195/55R13	G	Pilot Exalto PE2	N/A	13	5.5-7	80V	7.68	21.34	556110
165/60R14	G	Pilot Exalto PE2	N/A	14	4.5-6	75H	6.89	21.93	556111
175/60R14	G	Pilot Exalto PE2	N/A	14	5-6	79V	6.97	22.13	556112
185/60R14	G	Pilot Exalto PE2	N/A	14	5-6	82V	7.32	22.68	556113
185/55R14	G	Pilot Exalto PE2	N/A	14	5-6.5	80V	7.28	22.09	556114
185/55R15	G	Pilot Exalto PE2	N/A	15	5-6.5	82V	7.68	23.19	556115
195/50R15	G	Pilot Exalto PE2	N/A	15	5.5-7	82V	7.68	22.83	556116
195/55R15	G	Pilot Exalto PE2	N/A	15	5.5-7	85V	7.64	23.19	556117
195/60R15	H	Primacy 3	N/A	15	5.5-7	88V	8.07	24.45	556118
205/60R15	H	Primacy 3	N/A	15	5.5-7.5	91W	8.07	24.45	556119
235/60R16	H	Primacy 3	N/A	16	6.5-8.5	100W	9.17	26.85	556120
205R16	I	XM + S 244	N/A	16	5-7	104T	7.99	28.98	556097

Note: BW=Blackwall

TRX

TIRE SIZE	PHOTO	RIM DIAMETER	RECOMMENDED RIM WIDTHS	LOAD/SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	ITEM #
190/55VR340	J	340MM	120mm, 135mm, 165mm	81V	7.80	21.90	512856
190/55HR340 NOS*	J	340MM	120mm, 135mm, 165mm	81H	7.80	21.90	512857
165/70R365 NOS*	J	365MM	120mm, 135mm	86	7.80	22.90	98964
190/55HR365 NOS*	J	365MM	120mm, 135mm, 165mm	81H	7.80	22.90	512858
200/60HR365 NOS*	J	365MM	120mm, 135mm, 165mm	90H	8.10	24.20	555791
220/55VR365	J	365MM	135mm, 150mm, 180mm	92V	8.90	24.30	555793
190/65HR390	J	390MM	120mm, 135mm, 165mm	89H	7.50	25.10	555691
200/60VR390	J	390MM	120mm, 135mm, 165mm	90V	7.60	24.70	631944
210/55VR390	J	390MM	135mm, 150mm, 180mm	91V	8.25	24.50	631946
220/55VR390	J	390MM	135mm, 150mm, 180mm	93W	8.50	25.10	631947
240/55VR390	J	390MM	150mm, 165mm, 195mm	89W	9.80	26.20	631954
240/45VR415GT	K	415MM	150mm, 165mm, 195mm	94W	9.60	25.10	68811
240/55VR415	J	415MM	150mm, 165mm, 195mm	94W	9.80	27.20	68812

SX MXX3 N2

TIRE SIZE	PHOTO	RIM DIAMETER	RECOMMENDED RIM WIDTHS	LOAD/SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	ITEM #
205/55ZR16	L	16	5.5-7.5	91Y	8.77	25.27	556103
245/45ZR16	L	16	7.5-9	94Y	9.96	24.96	556104

*NOS=New Old Stock. These tires may have been manufactured ten or more years ago, but they have never been mounted or used. To the best of our knowledge, they have been stored in a warehouse environment and have not been subjected to ultraviolet light. These tires are no longer produced, and are only offered to provide your vehicle with original stock tires for appearance purposes. This stock may represent the only market source for these items at the present time. Accordingly, we offer no warranties on these products.

Note: These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.



A wide range of fitments and excellent performance makes the Vredestein product line a favorite for classic sports car enthusiasts.



SHOP NOW!
Scan Code With Phone Camera



TIRE SIZE	PHOTO	RECOMMENDED RIM WIDTHS	CONSTRUCTION	LOAD/SPEED INDEX	MAX LOAD CAPACITY	SECTION WIDTH	OVERALL DIAMETER	ITEM #
640/700SR13 SPRINT CLASSIC	B	4.5-5	POLY/STEEL	87S	1199@35PSI	6.97	25.20	506552
205/60VR13 SPRINT CLASSIC	B	5.5-7.5	POLY/STEEL	86V	1168@32PSI	8.23	22.68	51101
135SR14 SPRINT CLASSIC	A	3-4	POLY/STEEL	70S	738@32PSI	5.39	22.60	5128662
165HR14 SPRINT CLASSIC	A	4.5-6	POLY/STEEL	84H	1080@32PSI	6.60	24.50	5128672
175HR14 SPRINT CLASSIC	A	4.5-6	POLY/STEEL	88H	1234@32PSI	7.00	25.00	5128682
185HR14 SPRINT CLASSIC	A	5-6.5	POLY/STEEL	90H	1279@32PSI	7.40	25.60	5128685
195/70VR14 SPRINT CLASSIC	B	5-7	POLY/STEEL	91V	1102@32PSI	7.90	24.80	526053
205/70VR14 SPRINT CLASSIC	B	5.5-7.5	POLY/STEEL	95V	1521@36PSI	8.20	25.40	512891
155SR15 SPRINT CLASSIC	A	4-5.5	POLY/STEEL	82S	1047@32PSI	6.20	24.80	56065
165HR15 SPRINT CLASSIC	A	4.5-6	POLY/STEEL	86H	1124@32PSI	6.60	25.40	579821
175/70HR15 SPRINT CLASSIC	B	4.5-6	POLY/STEEL	86H	1168@32PSI	6.97	24.69	579830
185HR15 SPRINT CLASSIC	A	5-6.5	POLY/STEEL	91H	1312@32PSI	7.40	26.50	579878
185/70HR15 SPRINT CLASSIC	B	5-6.5	POLY/STEEL	89H	1279@36PSI	7.40	25.20	579853
205/70VR15 SPRINT CLASSIC	B	5.5-7.5	POLY/STEEL	96V	1565@36PSI	8.20	26.30	579857
215/70VR15 SPRINT CLASSIC	B	5.5-7.5	POLY/STEEL	96V	1565@36PSI	8.25	26.88	579858
185HR16 SPRINT CLASSIC	A	5-6.5	POLY/STEEL	93H	1389@32PSI	7.40	27.50	662902
195/60R15 SPRINT+	C	15	5.5-7	88V	1653@32PSI	10	24.21	106102579893
205/55ZR15 Sprint+	C	15	5.5-7.5	88W	1433@32PSI	8.1	23.9	106102579894
215/50ZR15 Sprint+	C	15	6-7.5	88W	1235@32PSI	7.7	23.5	106102579895
205/50ZR17 Sprint+	C	17	5.5-7.5	93Y	1235@32PSI	8.1	25.11	106102579892
255/40ZR17 Sprint+	C	17	8.5-10	98Y	1235@32PSI	8.5	25.03	106102579891
205R16 GRIP CLASSIC	D	16	5-7.5	104T	1984@32PSI	8.2	29.23	106103579896

Note: These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.



RADIAL 560

The Firestone F560 is an affordable option for vintage European classics, including the famous Volkswagen Beetle and many more. The sizing options also work well for Hot Rod front runners.



SHOP NOW!
Scan Code With Phone Camera

TIRE SIZE	RECOMMENDED RIM WIDTHS	CONSTRUCTION	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #
145R13	4-5	POLY/STEEL	825@44PSI	4.46	5.40	22.29	55589
155R14	4-5.5	POLY/STEEL	990@44PSI	4.40	6.20	23.80	55592
125R15	3.5-4.5	POLY/STEEL	695@44PSI	3.75	5.00	23.00	55593
135R15	3.5-4.5	POLY/STEEL	780@44PSI	4.00	5.00	23.57	55597
145R15	4-5	POLY/STEEL	935@44PSI	4.10	5.60	24.30	56044
155R15	4-5.5	POLY/STEEL	1045@44PSI	4.40	6.18	24.80	56047
165R15	4.5-6	POLY/STEEL	1170@36PSI	4.80	6.57	25.43	568741

Note: These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. *165R15 is not ECE Approved.



EXCELSIOR

VINTAGE TIRES

STAHL SPORT RADIAL

If you're looking for a classic-styled radial for a Pre-WWII car, you've found it! The Excelsior Stahl Sport radial features a European-inspired tread pattern, and 20 sizes to fit a wide variety of vehicles. Mix and match for the perfect Hot Rod stance!



1932 Ford Sedan
Tires: Excelsior Stahl Sport Radials
Front: 550R16
Rear: 750R16



TIRE SIZE	RIM WIDTHS	CONSTRUCTION	LOAD/SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
500R16	4-5	4 PLY POLY/STEEL	80H	992@35PSI	4.40	5.40	25.00	64304	85363
550R16	4-5	4 PLY POLY/STEEL	88H	1268@41PSI	4.30	5.90	26.50	643051	85640
600R16	4-5	4 PLY POLY/STEEL	93H	1400@35PSI	4.60	6.50	28.00	643498	85640
650R16	4-6	4 PLY POLY/STEEL	96H	1580@35PSI	4.90	6.90	28.80	66302	85366
700R16	4-6	6 PLY POLY/STEEL	98H	1650@35PSI	5.20	7.80	29.10	676443	85366
750R16	4-6	6 PLY POLY/STEEL	107H	2150@41PSI	5.50	7.50	31.60	682297	85373
550R17	4.5-5	6 PLY POLY/STEEL	89S	1279@41PSI	4.60	5.70	28.50	688901	86100
600/650R17	5-6	8 PLY POLY/STEEL	100S	1764@44PSI	4.70	6.50	29.70	706251	86100
700/750R17	5-6	8 PLY POLY/STEEL	103S	1929@44PSI	6.30	8.60	32.10	706258	86260
550R18	4-5	6 PLY POLY/STEEL	89S	1279@44PSI	4.40	5.50	28.50	721649	86100
600/650R18	4-5	8 PLY POLY/STEEL	99S	1709@44PSI	4.65	6.80	30.50	721653	86100
700R18	4-6	8 PLY POLY/STEEL	103S	1929@44PSI	5.00	7.70	31.60	725601	86260
500R19	4-5	6 PLY POLY/STEEL	84S	1102@44PSI	3.70	4.50	29.40	741761	86400
550R19	4-5	6 PLY POLY/STEEL	88S	1235@44PSI	4.00	5.10	30.10	741771	86430
600R19	4-5	6 PLY POLY/STEEL	90S	1323@44PSI	4.10	5.50	30.30	742141	86704
650R19	4-6	8 PLY POLY/STEEL	98S	1653@44PSI	4.50	6.60	30.90	742321	86704
700R19	4-6	8 PLY POLY/STEEL	103S	1929@44PSI	5.10	6.90	32.20	745151	86704
600R20	4-6	6 PLY POLY/STEEL	94S	1477@44PSI	4.00	5.30	33.60	76118	86704
650/700R20	6-7	8 PLY POLY/STEEL	103S	1945@44PSI	6.00	7.50	35.10	761211	86704
550/600R21	4-5	6 PLY POLY/STEEL	94S	1477@44PSI	4.00	5.80	32.10	789651	87040

Note: Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim width and inflation pressure. **CAUTION:** The unique construction of a radial ply tire, places forces and stresses on a rim assembly that are different from the forces and stresses placed on a rim assembly by a bias ply tire. Always consult a tire and rim expert to be sure your rim can withstand the radial tire operational and performance pressures. Always use a certified or trained tire and rim expert when mounting collector radial tires especially on rims designed for bias tires. Always use inflation pressures recommended by tire manufacturer. Always use tubes designed specifically for radial tires. Manufacturer/Distributor is not responsible for personal injury or property damage caused by mounting radial tires on rims that were originally designed for bias ply tires or bias belted tires.



SHOP NOW!
Scan Code With Phone Camera



Dunlop tires are an excellent choice for classic sports cars. We're proud to offer the Sport Classic and Aquajet product lines in the iconic Dunlop brand.



SHOP NOW!
Scan Code With
Phone Camera

TIRE SIZE	PHOTO	RIM DIAMETER	TIRE MODEL	RIM WIDTHS	LOAD/SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	ITEM #
145SR10	A	10	Aquajet	3.5-4	68S	147MM	492MM	622961
165/70SR10	A	10	Aquajet	4.5-5	72S	165MM	494MM	50285
155HR13	A	13	Aquajet	4-5.5	78S	157MM	578MM	629929
165HR13	A	13	Aquajet	4.5-6	82H	167MM	596MM	629930
185VR15	A	15	Aquajet	4.5-6.0	91V	188MM	674MM	629931
ER70VR15(205/70VR15)	A	15	Aquajet	5.0-7.0	93V	202MM	669MM	629932
165/80R14 (85H)	B	14	Sport Classic	4.5-6	85H	167MM	622MM	629955
175/80R14 (88H)	B	14	Sport Classic	4.5-6	88H	178MM	634MM	629956
185/70R14 (88H)	B	14	Sport Classic	5-6.5	88H	191MM	614MM	629957
185/80R14 (91H)	B	14	Sport Classic	4.5-6.5	91H	188MM	650MM	629958
195/70R14 (91V)	B	14	Sport Classic	5.0-6.5	91V	201MM	629MM	629959
205/70R14 (95W)	B	14	Sport Classic	5.0-7.0	95W	209MM	644MM	629946
155/80R15 (83H)	B	15	Sport Classic	4-5.5	83H	157MM	630MM	629960
165/80R15 (87H)	B	15	Sport Classic	4.0-5.5	87H	167MM	646MM	629947
185/70R15 NO (89V)	B	15	Sport Classic	4.5-7.0	89V	189MM	641MM	629948
185/80VR15 (93W)	B	15	Sport Classic	4.5-6.0	93W	188MM	674MM	629949
205/70R15 (96W)	B	15	Sport Classic	5.0-7.0	96W	209MM	669MM	629950
215/70R15 (98W)	B	15	Sport Classic	5.5-7.0	98W	221MM	683MM	629952
215/60R15 NO (94V)	B	15	Sport Classic	6.0-8.0	94V	221MM	639MM	622964
185VR15	A	15	Aquajet	4.5-6.0	91V	188MM	674MM	629931
ER70VR15(205/70VR15)	A	15	Aquajet	5.0-7.0	93V	202MM	669MM	629932



NARROW WHITEWALLS

If you're looking for an affordable whitewall tire, the Travelstar is a nice option with a great selection of sizes. The all-season tread and steel belted radial construction offers excellent ride quality and handling.



SHOP NOW!
Scan Code With
Phone Camera

TIRE SIZE	WHITEWALL WIDTH	RIM DIAMETER	RIM WIDTHS	LOAD/SPEED INDEX	MAX LOAD CAPACITY	SECTION WIDTH	OVERALL DIAMETER	ITEM #
P155/80R13	14mm	13	4.5	79T	963lbs	6.18	22.76	502800
P175/70R14	14mm	14	5	84T	1102lbs	6.97	23.7	502811
P175/75R14	14mm	14	5	86T	1168lbs	6.97	24.33	502801
P185/75R14	18mm	14	5	89S	1280lbs	7.24	24.96	502802
P195/75R14	18mm	14	5.5	92S	1389lbs	7.72	25.51	502803
P205/75R14	18mm	14	5.5	95S	1521lbs	7.99	26.14	502804
P205/75R15	18mm	15	5.5	97S	1609lbs	7.99	28.54	502805
P215/70R15	18mm	15	4.5	98T	1620lbs	8.7	28.94	502806
P215/75R15	18mm	15	6	100S	1764lbs	8.5	31.1	502807
P225/75R15	18mm	15	6	102S	1874lbs	8.78	33.46	502808
P235/75R15	18mm	15	7	105S	2039lbs	9.25	36.22	502809
P225/60R16	9mm	16	6.5	98T	1609lbs	8.98	26.61	502810
P225/60R17	9mm	17	6.5	99T	1709lbs	8.98	27.6	50280

Note: Travelstar whitewalls range in size from 9mm (about 3/8 inch) to 18mm (about 3/4 inch). The 9mm (about 3/8 inch) whitewall is shown here on a 225/60R17 Tire.



The Avon product line includes several size and tread options, including fitments for sports cars, luxury sedans and classic trucks.

SHOP NOW!
Scan Code With
Phone Camera



TIRE SIZE	PHOTO	RIM DIAMETER	TIRE MODEL	RIM WIDTHS	LOAD/SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	ITEM #	WW ITEM #
195/55R13	A	13	Avon CR27 (80V)	5.5-7	80V	194MM	541MM	629910	
590H15	A	15	Avon Turbospeed	4-4.5	81H	163MM	660MM	56411	
670H15	A	15	Avon Turbospeed	4.5-5	91H	168MM	678MM	57802	
185VR15	C	15	Avon Turbosteel	5-6.5	93V	182MM	676MM	57989	
820H15	A	15	Avon Turbospeed	6-6.5	102H	230MM	752MM	61997	
640H15	F	15	Avon Super Safety	4.5-5	93H	168MM	678MM	622962	
890S15 (110S)	A	15	Avon Turbospeed	6.5-7	110S	232MM	795MM	622963	
235/70R15 (101V)	E	15	Avon Turbosteel ACR11B	6-8.5	101V	240MM	711MM	629913	629914
205VR15	D	16	Avon Textile	5.5-7.5	97V	211MM	708MM	62422	
550-16	E	16	Avon Tourist	3.5-4	80L	150MM	691MM	64301	
165HR16	B	16	Avon Turbosteel	4.5-6	88H	165MM	680MM	64307	
600H16	A	16	Avon Turbospeed	4-4.5	93H	180MM	710MM	64753	
185VR16	B	16	Avon Turbosteel	4.5-6	93V	185MM	694MM	66290	
670H16	A	16	Avon Turbospeed	4.5-5	89H	195MM	724MM	67637	
600-16	G	16	Avon Tourist	4-4.5	86L	165MM	720MM	629915	
600-16	H	16	Avon Traction Mileage	4.5-5	97/94L	167MM	726MM	629916	
700-16	H	16	Avon Traction Mileage	5-6J	102/100L	198MM	772MM	629917	
670R16 (101H) XL	B	16	Avon Turbosteel	4-6J	101H XL	176MM	722MM	629918	
235/65R16 (103V)	I	16	Avon CR227	6-8J	103V	240MM	712MM	629967	629966



GERMAN STYLE TIRES

SHOP NOW!
Scan Code With
Phone Camera



This is German styling at its finest! The Phoenix radial tire is available in two popular sizes and works beautifully on many 1960's and 1970's Mercedes models.



TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	CONSTRUCTION	LOAD/SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DMTR	WW ITEM #	BW ITEM #
185R14	A	3/4	5.5	POLY/STEEL	90H	1323@35 PSI	5.50	7.25	25.00	629708	-
820R15	B	3	6	POLY/STEEL	101H	1815@36PSI	8.53	8.69	29.97	629772	629773



Camac Radial tires are a great choice for your classic compact car, with direct fitments for Mini Cooper, Fiat, Peugeot, and more!



SHOP NOW!
Scan Code With
Phone Camera



TIRE SIZE	RECOMMENDED RIM WIDTHS	CONSTRUCTION	LOAD / SPEED INDEX	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #
145R10	3-4	POLY/STEEL	68S	694@30PSI	4.50	5.12	19.30	50279
145R14	3-4	POLY/STEEL	75S	880@44PSI	4.10	5.60	23.30	50281



BIAS PLY

Firestone is an iconic tire brand that is known for its quality and reliability, especially in the Deluxe Champion product line. We're proud to offer dozens of Firestone bias ply tire options, ranging from compact car fitments, all the way to Cadillacs and other full-size classics. With OE fitments for thousands of applications, Firestone is one of our most popular brands.



SHOP NOW!
Scan Code With
Phone Camera



DELUXE CHAMPION

TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBES
520-13	A	2	3.5-4	4 PLY POLY	770@32PSI	3.80	5.50	23.10	506540	5065390	TL
560-13	B	2 1/4	4-4.5	4 PLY POLY	850@30PSI	3.55	5.94	23.66	506550	-	TL
700-13	C	5/8	4-5	4 PLY POLY	1270@32PSI	4.4	6.90	24.78	51105		TL
750-14	D	2 1/4	5-6	4 PLY POLY	1580@32PSI	4.25	7.52	26.89	517810	517805	TL
775-14	E	7/8	5-6	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	526060	-	TL
775-14	E	3/8 RED LINE	5-6	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	526065	-	TL
775-14	E	3/8 GOLD LINE	5-6	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	526070	-	TL
560-15	B	1	4.5-5	4 PLY POLY	970@32PSI	3.80	5.96	25.79	556658	556655	TL
560-15*	B	2 3/4	4.5-5	4 PLY POLY	970@32PSI	3.80	5.96	25.79	556660	-	TL
640-15	B	1	4.5-5	4 PLY POLY	970@32PSI	4.30	6.60	27.30	566052	-	TL
640-15	B	2 1/8	4.5-5	4 PLY POLY	970@32PSI	4.30	6.60	27.30	566050	-	TL
640-15	B	2 3/4	4.5-5	4 PLY POLY	1190@32PSI	4.30	6.60	27.30	566053	566040	TL
670-15	F	1	4.5-5	4 PLY POLY	1450@32PSI	4.50	7.01	28.58	568805	568800	TL
670-15	G	2 1/4	5-6	4 PLY POLY	1450@32PSI	4.50	7.01	28.58	568810	-	TL
670-15*	H	2 11/16	5-6	4 PLY POLY	1450@32PSI	4.50	7.01	28.58	568815	-	TL
670-15*	I	3 1/4	5-6	4 PLY POLY	1450@32PSI	4.50	7.01	28.58	568820	-	TL



1956 Chevrolet Convertible
Tires: Firestone 670-15

TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBES
700-15*	I	4 1/8	5-5.5	4 PLY POLY	1700@32PSI	5.38	7.40	29.29	587110	587105	TT
710-15*	H	2 3/4	5-5.5	4 PLY POLY	1550@32PSI	4.50	7.70	28.88	579885	579880	TL
710-15*	H	3 1/4	5-5.5	4 PLY POLY	1550@32PSI	4.50	7.70	28.88	579890	-	TL
775-15	J	5/8	6	4 PLY POLY	1490@32PSI	4.70	7.28	27.36	597050	597040	TL
775-15	J	7/8	6	4 PLY POLY	1490@32PSI	4.70	7.28	27.36	597060	-	TL
775-15	K	3/8 RED LINE	6	4 PLY POLY	1490@32PSI	4.70	7.65	27.24	597034	-	TL
775-15	K	3/8 GOLD LINE	6	4 PLY POLY	1490@32PSI	4.70	7.65	27.24	597036	-	TL
820-15*	L	3 1/2	6-6.5	4 PLY POLY	1920@32PSI	5.00	8.35	29.56	613118	613113	TL
820-15*	L	4 1/4	6-6.5	4 PLY POLY	1920@32PSI	5.00	8.35	29.56	613120	-	TL
LR78-15	M	3/4	6-6.5	4 PLY POLY/ STEEL	1970@32PSI	6.10	9.80	28.78	62975		TL
890-15	L	3	6.5-7	8 PR POLY	2500@40PSI	5.00	8.80	31.00	613117	-	TL
890-15	L	5	6.5-7	8 PR POLY	2500@40PSI	5.00	8.80	31.00	613122	-	TL

*Lettering in whitewall. CL-Clinchers (imported). •Non Skids or Smooth tread (available in all white & black) may provide poor mileage. **All Gray Smooth tread may require Special Order, same price as Smooth All White.
Note: Always buy new tubes and flaps. Metal stem tubes, flaps, and rimstrips on pages 78 & 79. These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.



Firestone

BIAS PLY

Our Firestone offerings include many sizes to fit Pre-WWII cars and trucks. With wide whitewalls, blackwalls and special tread designs, this is the most comprehensive product line in Coker Tire's selection.



SHOP NOW!
Scan Code With
Phone Camera

Model A Roadster
Tires: Firestone 700-18



TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
450/475-16*	A	2 1/4 WW	2.75-3	4 PLY POLY	660@30PSI	3.80	4.75	26.20	633505	633500	85363
500/525-16	B	2 1/4 WW	3-3.25	4 PLY POLY	1070@32PSI	3.75	5.26	26.50	635965	635960	85363
550-16	C	2 1/2 WW	3.25-4	4 PR POLY	840@32PSI	4.25	6.06	27.36	639755	639750	85363
600-16*	A	3 1/4 WW	4-4.5	4 PLY POLY	1400@32PSI	4.63	6.26	28.56	643510	643500	85640
600-16*	A	3 1/4 DBL WW	4-4.5	4 PLY POLY	1400@32PSI	4.63	6.26	28.56	643520	-	85640
600-16	D	KNOBBY	4-4.5	4 PLY POLY	1400@32PSI	4.63	6.26	28.56	643507	-	85640
185HR16***	E	CAVALINO	5.5-6	4 PLY POLY	1355@35PSI	4.75	7.44	27.56	-	662800	85640
650-16	A	3 nonscript	4.5-5	4 PLY POLY	1580@32PSI	5.10	7.00	29.10	663515	663500	85366
650-16*	A	4 WW	4.5-5	4 PLY POLY	1580@32PSI	5.10	7.00	29.10	663520	-	85366
650-16	D	KNOBBY	4.5-5	4 PLY POLY	1580@32PSI	5.10	7.00	29.10	-	663510	85366
670-16	A	BW	4.5-5	6 PR POLY	1130@30PSI	4.75	6.77	28.62	-	676400	85366
700-16*	F	4 WW	4.5-5.5	6 PR POLY	1800@36PSI	5.60	8.09	30.94	676460	676450	85366
750-16*	F	4 1/2 WW	5-6	8 PR POLY	1660@40PSI	4.96	8.28	31.48	682310	682300	85372
525/550-17*	A	3 WW	3.25	4 PLY POLY	955@32PSI	4.00	5.91	29.02	688965	688960	86100
525/550-17*	A	3 DBL WW	3.25	4 PLY POLY	955@32PSI	4.00	5.91	29.02	688970	-	86100
600/650-17*	A	4 WW	4	6 PLY POLY	1320@36PSI	4.38	7.20	30.50	700610	700600	86100
12/13/14x45	G	BW	4	4 PR NYLON	1430@58PSI	3.75	4.9	29.25	-	71228	86276
550-18*	G	3 1/4 WW	3	4 PLY POLY	1125@32PSI	4.3	5.94	29.13	713910	713900	86100
550-18*	G	3 1/4 DBL WW	3	4 PLY POLY	1125@32PSI	4.3	5.94	29.13	713920	-	86100
475/500-19*	H	2 5/8 WW	2.5-3	4 PLY POLY	895@32PSI	3.9	5.63	29.80	729610	729600	86400
550/600-19*	G	3 1/2 WW	2.5-3	6 PR POLY	1255@36PSI	4.8	7.30	32	72161	72162	86400
14/15/16x50	G	BW	3.50	4 PR NYLON	1100@50PSI	4.00	5.15	31.15	-	746395	86276
475/500-20*	H	2 3/8 WW	2.5-3	4 PLY POLY	1170@32PSI	3.63	5.39	30.59	747955	747950	87000
600-20 (30X5)	F	3 1/2 WW	3	6 PR POLY	1400@50PSI	4.88	6.3	32.63	755210	755200	86600
600-20 (30X5)	I	TRUCK BW	5	6 PR POLY	1820@60PSI	4.88	6.30	32.63	-	761399	86600
650-20* (32X6)	F	3 3/4 WW	3	6 PR POLY	2120@60PSI	5.20	7.82	34.58	761510	761500	86600
650-20 (32X6)	I	TRUCK BW	3	6 PR NYLON	2120@60PSI	5.20	7.80	34.60	-	761400	86600
700-20	I	TRUCK BW	3.75-4	8 PLY POLY	3150@90PSI	5.25	6.9	35	-	761401	86600
440/450-21*	H	2 3/8 WW	2.5-3	4 PLY POLY	800@35PSI	3.75	4.69	30.79	775980	775970	87000
525-21*	G	3 WW	2.5-3	6 PR POLY	1120@36PSI	4.25	5.12	31.50	789690	789680	87000




*Lettering in whitewall. CL-Clinchers (imported). •Non Skids or Smooth tread (available in all white & black) may provide poor mileage. **All Gray Smooth tread may require Special Order, same price as Smooth All White. *** Imported.
Note: Always buy new tubes and flaps. Metal stem tubes, flaps, and rimstrips on pages 78 & 79. These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.





BALLOON

Designed for Luxury cars from the 1920's and 1930's, the Firestone Balloon offer the correct fitment, tread pattern and sidewall markings for priceless builds, such as Duesenberg, Cord, Packard and many more!

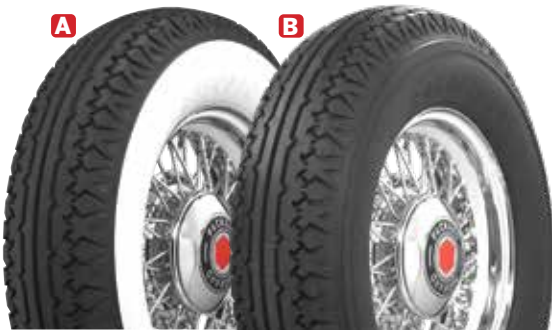



SHOP NOW!
Scan Code With
Phone Camera



TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
700-17*	A/B	4 1/4	4	6 PLY POLY	1480@36PSI	5.66	8.25	31.60	708010	708000	86100
700-17*	A	4 1/4 DBL WW	4	6 PLY POLY	1480@36PSI	5.66	8.25	31.60	708020	-	86100
750-17*	A/B	4 3/4	4	8 PLY POLY	1870@40PSI	6.32	8.25	32.80	709061	709065	86260
750-17*	A	4 3/4 DBL WW	4	8 PLY POLY	1870@40PSI	6.32	8.25	32.80	709063	-	86260
650-18	A/B	3 1/2	3.25-3.50	4 PLY POLY	1205@36PSI	5.15	6.25	32.00	72570	72571	86100
700-18*	A/B	4 1/4	3.75-4	6 PLY POLY	1520@36PSI	5.66	8.00	32.50	72583	72577	86100
700-18*	A	4 1/4 DBL WW	3.75-4	6 PLY POLY	1520@36PSI	5.66	8.00	32.50	72585	-	86100
750-18*	A/B	4 3/4	4	8 PLY POLY	1930@40PSI	6.23	8.60	33.80	72823	72827	86260
750-18*	A	4 3/4 DBL WW	4	8 PR POLY	1930@40PSI	6.23	8.60	33.80	72825	-	86260
650-19	A/B	3 1/2	3.25-3.50	6 PR POLY	1430@36PSI	5.1	6.25	33.00	72572	72573	86600
700-19*	A/B	4 1/4	3.75-4	6 PLY POLY	1570@36PSI	5.60	8	33.4	74448	74447	86600
700-19*	A	4 1/4 DBL WW	3.75-4	6 PLY POLY	1570@36PSI	5.6	8	33.4	74449	-	86600
750-19	A	4 3/4 DBL WW	4	8 PLY POLY	1980@40PSI	6.25	7.60	35	746363	-	86600
750-19*	A/B	4 3/4	4	8 PLY POLY	1980@40PSI	6.25	7.60	35	746361	746365	86600
700-20	A	4 1/4 DBL WW	3.75-4	8 PLY POLY	1980@40PSI	5.40	7.35	34.2	77262	-	86600
700-20	A/B	4 1/4	3.75-4	8 PLY POLY	1930@40PSI	5.40	7.35	34.20	77260	77265	86600

HIGH PRESSURE

Featuring The iconic Firestone Non-Skid tire!



SHOP NOW!
Scan Code With Phone Camera



TIRE SIZE	PHOTO	TREAD DESIGN	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
28x3 CL	E	NON SKID	1.77	4 PLY NYL	450@65PSI	3	3.00	28.00	791910	791900	87100
28x3 CL	B	SMOOTH	1.77	4 PLY NYL	450@65PSI	3	3.00	28.00	791922	791920	87100
28x3** CL	C	SMOOTH ALL GRAY	1.77	4 PLY NYL	450@65PSI	3	3.00	28.00	791923	-	87100
30X3 1/2 CL	E	NON SKID	2.025	4 PLY NYL	800@65PSI	3	3.50	30.00	793710	793700	87200
30X3 1/2 CL	B	SMOOTH	2.025	4 PLY NYL	800@65PSI	3.00	3.5	30.00	793755	793750	87200
30X3 1/2 CL	D	BLACK	2.025	4 PLY NYL	800@65PSI	3.00	3.90	31.30	793860	793850	87200
30x3 CL	E	NON SKID	1.75	4 PLY NYL	450@65PSI	2.30	3.00	30.00	805810	805800	87300
30X3 CL	B	SMOOTH	1.75	4 PLY NYL	450@65PSI	3.00	3.00	30.00	805855	805850	87300
30x3** CL	C	SMOOTH ALL GRAY	1.75	4 PLY NYL	450@65PSI	3.00	3.00	30.00	805856	-	87300
30X3 CL	D	BLACK	1.75	4 PLY NYL	450@65PSI	2.5	3.90	31.30	805900	805910	87300
32X4 1/2	A	NON SKID	3.125	6 PLY NYLON	1353@65PSI	2.31	4.53	33.25	805976	805975	87400
33X5	A	NON SKID	4.25	6 PLY NYLON	1102@60PSI	2.56	5.1	34	805981	805980	87500
32X4	A	NON SKID	2.750	6 PLY NYLON	1051@60PSI	2.19	4.08	32.75	805986	805985	87400
33X4 1/2	A	NON SKID	4.25	6 PLY NYLON	1252@60PSI	2.31	5.10	34	805991	805990	87500
33X4	A	NON SKID	2.750	6 PLY NYLON	1051@60PSI	2.19	4.08	33.8	805996	805995	87400
34X4 1/2	A	NON SKID	4.25	6 PLY NYLON	1252@60PSI	2.31	4.56	34.80	806006	806005	87500
35X5	A	NON SKID	4.25	6 PLY NYLON	1700@70PSI	2.56	5.10	37.00	806011	806010	87500
34X4	A	NON SKID	2.750	6 PLY NYLON	1102@60PSI	2.31	5.1	34.25	806016	806015	87400
36X4 1/2	A	NON SKID	4.250	6 PLY NYLON	1252@60PSI	2.31	4.53	36.75	806021	806020	874251
37X5	A	NON SKID	4.0	8 PLY NYLON	1803@70PSI	2.56	5.10	38.25	806026	806025	874251
36X4	A	NON SKID	4.250	6 PLY NYLON	1050@60PSI	3.43	4.31	37.37	806031	806030	874251

*Lettering in whitewall. CL-Clinchers (imported). •Non Skids or Smooth tread (available in all white & black) may provide poor mileage. **All Gray Smooth tread may require Special Order, same price as Smooth All White. *** Imported.
Note: Always buy new tubes and flaps. Metal stem tubes, flaps, and rimstrips on pages 78 & 79. These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.



SHOP NOW!
Scan Code With Phone Camera



1969 Plymouth Road Runner
Tires: Firestone Wide Oval F70-15

We manufacture the original Firestone Wide Oval bias ply tires, using original molds that are refurbished to modern specifications. We offer them in a wide range of 14- and 15-inch sizes, with options for Pinstripe 3/8-inch Whitewall, 3/8-inch Redline and Raised White Letters. This is the most authentic tire for your muscle car!



TIRE SIZE	PHOTO	SIDEWALL	RECOMMENDED RIM WIDTHS	CONSTRUCTION	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #
D70-14	D	RWL	6	POLY/FIBERGLASS	1320@32PSI	6.20	7.90	25.40	54640
D70-14	C	PIN WHITE	6	POLY/FIBERGLASS	1320@32PSI	6.20	7.90	25.40	54650
D70-14	E	REDLINE	6	POLY/FIBERGLASS	1320@32PSI	6.20	7.90	25.40	54660
E70-14	D	RWL	6-7	POLY/FIBERGLASS	1400@32PSI	6.40	8.00	25.70	54670
E70-14	C	PIN WHITE	6-7	POLY/FIBERGLASS	1400@32PSI	6.40	8.00	25.70	54680
E70-14	E	REDLINE	6-7	POLY/FIBERGLASS	1400@32PSI	6.40	8.00	25.70	54690
F70-14	D	RWL	6-7	POLY/FIBERGLASS	1500@32PSI	6.70	8.30	26.20	54850
F70-14	C	PIN WHITE	6-7	POLY/FIBERGLASS	1500@32PSI	6.70	8.30	26.20	54860
F70-14	E	REDLINE	6-7	POLY/FIBERGLASS	1500@32PSI	6.70	8.30	26.20	54870
G70-14	D	RWL	6.5-7	POLY/FIBERGLASS	1620@32PSI	6.90	8.80	26.80	55250
G70-14	C	PIN WHITE	6.5-7	POLY/FIBERGLASS	1620@32PSI	6.90	8.80	26.80	55260
G70-14	E	REDLINE	6.5-7	POLY/FIBERGLASS	1620@32PSI	6.90	8.80	26.80	55270
E70-15	A	SC200RWL	6.5-8	4 PLY NYLON	1400@32PSI	6.00	8.30	26.60	62425
F70-15	D	RWL	5.5-8	POLY/FIBERGLASS	1500@32PSI	6.50	8.30	26.90	62450
F70-15	C	PIN WHITE	5.5-8	POLY/FIBERGLASS	1500@32PSI	6.50	8.30	26.90	62460
F70-15	E	REDLINE	5.5-8	POLY/FIBERGLASS	1500@32PSI	6.50	8.30	26.90	62470
F60-15	B	RWL	7-8	POLY/FIBERGLASS	1500@32PSI	8.80	9.20	25.90	62480
G70-15	D	RWL	5.5-8	POLY/FIBERGLASS	1620@32PSI	6.70	8.50	27.50	62650
G70-15	C	PIN WHITE	5.5-8	POLY/FIBERGLASS	1620@32PSI	6.70	8.50	27.50	62660
G70-15	E	REDLINE	5.5-8	POLY/FIBERGLASS	1620@32PSI	6.70	8.50	27.50	62670

Note: E70-15 Sport Car 200 available in raised white letter only. These tires are designed for vehicles manufactured prior to 1976. See page 85 for details. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation.



DIRT TRACK

1932 Ford Roadster
Tires: Firestone Dirt Track
Front: 500-15
Rear: 820-15

Firestone Dirt Track tires give your hot rod a race-inspired look, with a DOT approved bias ply construction. They're also a great option for race car restorations, as many of the sizes are manufactured using original Firestone molds.



SHOP NOW!
Scan Code With Phone Camera



TIRE SIZE	PHOTO	DESCRIPTION	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
400-12*	D	RIBBED FRONT	3-4	4 PLY NYLON	470@28PSI	3.00	5.05	20.15	50628	85050
500-12*	E	GRVD ASCOT REAR	4-5	4 PLY NYLON	605@30PSI	4.60	6.80	22.05	50648	85050
500-15	C	RIBBED FRONT	4-5	4 PLY NYLON	675@32PSI	4.10	5.60	24.85	55665	85363
820-15	A	GROOVED REAR	6-8.5	4 PLY NYLON	1415@32PSI	6.75	9.18	30.92	613099	85370
11.00-15	B	GROOVED REAR	9.5-12	4 PLY NYLON	2100@32PSI	11.75	15.00	30.60	613132	-
14/31-15	F	GROOVED REAR	13-16	4 PLY NYLON	1565@32PSI	14.00	17.00	31.00	613125	-
14/31-16	F	GROOVED REAR	13-16	4 PLY NYLON	1565@32PSI	14.00	17.00	31.00	613126	-
500-16	C	RIBBED FRONT	4-5	4 PLY NYLON	760@32PSI	4.10	5.90	25.85	72230	85363
890-16	B	GROOVED REAR	6-8.5	4 PLY NYLON	2035@32PSI	6.75	8.89	30.94	62237	62236
11.00-16	G	GROOVED REAR	6-8.5	4 PLY NYLON	2100@32PSI	11.75	15.00	30.60	613131	-
500-17	C	RIBBED FRONT	4-5	4 PLY NYLON	820@32PSI	3.80	5.90	27.00	688515	86100
820-17	A	GROOVED REAR	6-8.5	4 PLY POLY	1515@32PSI	6.25	8.80	33.00	55661	86260
500-18	C	RIBBED FRONT	4-5	4 PLY NYLON	857@32PSI	3.70	5.90	28.00	712280	86100
820-18	A	GROOVED REAR	6-8.5	4 PLY POLY	1415@32PSI	6.25	8.80	33.00	55662	86260
500-19	C	RIBBED FRONT	4-5	4 PLY NYLON	895@32PSI	3.60	5.90	29.00	728993	86400
820-19	A	GROOVED REAR	6-8.5	4 PLY POLY	1315@32PSI	6.50	8.80	33.00	55666	86600

* Not DOT & labeled for display purpose only.
Note: These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.



DRAGSTER

This is the ultimate piecrust Cheater Slick for your hot rod or gasser! They're DOT approved and feature a street compound.



SHOP NOW!
Scan Code With Phone Camera



TIRE SIZE	RIM WIDTHS	WHITEWALL WIDTH	CONSTRUCTION	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBES
820-15	7-8	2 1/4	4 PLY POLY	1920@32PSI	8.50	10.7	30.50	613097	613095	TL
1000-15	8-10	2 1/4	4 PLY POLY	1960@32PSI	9.50	12.0	30.20	623048	623046	TL
820-16	7-8	1 7/8	4 PLY POLY	1880@32PSI	8.50	10.7	30.10	613129	613127	TL
1000-16	8-10	1 7/8	4 PLY POLY	1920@32PSI	9.50	12.0	30.20	623054	623052	TL

Note: Firestone® Dragster tires are DOT approved for highway use. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation. These tires are designed for vehicles manufactured prior to 1976. See page 85 for details.



INDY

Our Firestone Indy product line includes fitments for a wide range of Indy cars and other racing applications. Be sure to grab a paint pen to personalize your sidewalls, just like the old days.



SHOP NOW!
Scan Code With Phone Camera



NASCAR 1966 Dodge Charger
Tires: Firestone Indy 1200-15

White & Gold Paint Markers Available For Authentic Looks!



TIRE SIZE	PHOTO	RIM WIDTHS	CONSTRUCTION	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
920-15	D	7-9.5	4 PLY NYLON	7.00	10.20	26.30	682280	MH900
1200-15	D	8.5-11	4 PLY NYLON	8.80	13.00	29.40	682284	MH1050
760-16	C	5.5-6	4 PLY NYLON	4.30	7.60	29.00	682291	85373
800-18	C	6.5-7	4 PLY NYLON	5.60	8.80	33.00	72831	86260
600-20	B	2.75-3.25	4 PLY NYLON	3.25	6.30	32.60	755000	86600
34X4 1/2	A	3-3.5	4 PLY NYLON	3.50	4.66	35.12	806000	87500

Note: Inflate to 35 PSI. Not DOT approved and for display purposes only. These tires are designed for vehicles manufactured prior to 1976. See page 85 for details. Paint Marker available for painting letters.



ORIGINAL EQUIPMENT TIRES



1959 Chevrolet Impala
Tires: BF Goodrich Silvertown Wide Whitewall 750-14

Our BFGoodrich Silvertown bias ply tires include O.E. fitments for thousands of applications. With a huge range of sizes and model-specific sidewall styles, this is one of our most comprehensive product lines. All tires are manufactured in refurbished original molds to retain authenticity.



SHOP NOW!
Scan Code With Phone Camera



TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
480-10	A	2 WW	3	2 PLY POLY	520@32PSI	3.35	4.50	18.70	50262	50260	85040
125B12	B	1 5/16 WW	4	4 PLY POLY	495@32PSI	3.13	4.50	18.70	502957	-	-
520-12	E	2 WW	4	4 PLY POLY	694@30PSI	3.25	5.25	21.15	5065389	-	-
560/600-12	E	1 3/4 WW	3.5	4 PLY POLY	815@30PSI	3.50	5.65	21.75	506545	-	-
560-13 S	F	1 WW	3.5-4	4 PLY POLY	850@30PSI	4.00	5.90	23.60	50665	-	-
560-13 S	F	2 1/4 WW	3.5-4	4 PLY POLY	850@30PSI	4.00	5.90	23.60	50667	-	-
590-13 S	E	2 3/8 WW	3.5-4	4 PLY POLY	970@32PSI	3.75	5.90	24.30	50670	-	-
600-13	B	1 WW	4-4.5	4 PLY POLY	1010@32PSI	3.80	6.00	23.78	50700	-	-
600-13	B	2 WW	4-4.5	4 PLY POLY	1010@32PSI	3.80	6.00	23.78	50900	-	-
640-13 S	B	2 1/4 WW	4-5.5	4 PLY POLY	1045@32PSI	4.25	6.40	25.30	51005	-	-
725-13 S	B	2 1/4 WW	4.5-5.5	4 PLY POLY	1360@32PSI	4.25	7.25	25.70	51270	-	-
560-14	D	1 WW	3.5-4	4 PLY POLY	906@30PSI	4.00	5.90	24.60	512875	512871	
560-14	C	2 1/4 WW	3.5-4	4 PLY POLY	906@30PSI	4.00	5.90	24.60	512877	-	-
695-14	D	5/8 WW	5-6	4 PLY POLY	1230@32PSI	4.30	7.00	25.70	51310	51305	
695-14	D	7/8 WW	5-6	4 PLY POLY	1230@32PSI	4.30	7.00	25.70	51320	-	-
695-14	G	DUAL RED	5-6	4 PLY POLY	1230@32PSI	4.30	7.00	25.70	51350	-	-
700-14	H	1 WW	5-5.5	4 PLY POLY	1360@32PSI	4.40	7.20	26.80	51730	51731	
735-14	H	1 WW	5-5.5	4 PLY POLY	1360@32PSI	4.40	7.20	26.80	51760	51758	
750-14	D	1 WW	5-5.5	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	51800	51790	
750-14	C	2 1/4 WW	5-5.5	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	52000	-	-
775-14	I	1 WW	5.5-6	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	52620	-	-



TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM#
775-14	I	3/8 BLUE	5.5-6	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	52618	-	-
775-14	I	3/8 GOLD	5.5-6	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	52617	-	-
775-14	I	3/8 RED	5.5-6	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	52616	-	-
800-14	D	1 WW	5-6	4 PLY POLY	1620@32PSI	4.58	8.10	27.58	53100	53050	-
800-14	C	2 1/4 WW	5-6	4 PLY POLY	1620@32PSI	4.58	8.10	27.58	53300	-	-
825-14	D	5/8 WW	5-6	4 PLY POLY	1620@32PSI	4.58	8.10	27.58	53850	-	-
825-14	D	1 WW	5-6	4 PLY POLY	1620@32PSI	4.58	8.10	27.58	53855	-	-
825-14	D	BW	5-6	4 PLY POLY	1620@32PSI	4.58	8.10	27.58	-	53845	-
850-14	E	1 WW	5.5-6	4 PLY POLY	1740@32PSI	4.75	8.35	28.10	53900	-	-
850-14	E	2 1/4 WW	5.5-6	4 PLY POLY	1740@32PSI	4.75	8.35	28.10	54100	-	-
855-14	E	5/8 WW	5.5-6	4 PLY POLY	1740@32PSI	4.75	8.35	28.10	54250	-	-
855-14	E	1 WW	5.5-6	4 PLY POLY	1740@32PSI	4.75	8.35	28.10	54255	-	-
885-14	E	1 WW	6	4 PLY POLY	1860@32PSI	4.80	8.80	26.68	54285	-	-
900-14	E	1 WW	6-7	4 PLY POLY	1860@32PSI	4.80	8.80	28.68	54300	-	-
900-14	E	2 1/4 WW	6-7	4 PLY POLY	1860@32PSI	4.80	8.80	28.68	54500	-	-
950-14	F	1 WW	6.5-7.5	4 PLY POLY	2000@32PSI	5.40	9.05	29.50	54610	-	-
950-14	F	2 1/2 WW	6.5-7.5	4 PLY POLY	2000@32PSI	5.40	9.05	29.50	54620	-	-
G78-14	J	DUAL 3/8	5-7	4 PLY BELT	1620@32PSI	5.38	8.35	27.10	55460	-	-
G78-14	J	1 WW	5-7	4 PLY BELT	1620@32PSI	5.38	8.35	27.10	55450	-	-
500-15	E	2 WW	3	4 PLY POLY	700@32PSI	4.00	5.10	24.38	55600	55610	-
590-15	C	2 5/8 WW	4-4.5	4 PLY POLY	1050@32PSI	3.75	6.30	26.50	56100	56300	-
600-15	J	2 5/8 WW	4.5-5	4 PLY POLY	1150@32PSI	4.35	6.00	26.00	56440	56450	-
640-15	E	3 WW	4.5-5	4 PLY POLY	1190@32PSI	4.20	6.25	26.88	56700	56850	-
670-15	H	1 WW	4.5-5	4 PLY POLY	1450@32PSI	4.50	7.00	28.00	57100	56900	-
670-15	K	2 1/2 WW	4.5-5	4 PLY POLY	1450@32PSI	4.50	7.00	28.00	57300	-	-
670-15	L	3 5/8 WW	4.5-5	4 PLY POLY	1450@32PSI	4.50	7.00	28.40	57500	-	-
700-15	M	4 1/8 WW	5-5.5	4 PLY POLY	1700@32PSI	5.38	7.35	29.10	58800	-	85370
710-15	E	1 WW	5-5.5	4 PLY POLY	1550@32PSI	4.60	7.40	27.98	57997	-	-
710-15	E	2 1/2 WW	5-5.5	4 PLY POLY	1550@32PSI	4.60	7.40	27.98	58000	-	-
710-15	E	3 WW	5-5.5	4 PLY POLY	1550@32PSI	4.60	7.40	27.98	58200	-	-
710-15	E	3 7/8 WW	5-5.5	4 PLY POLY	1550@32PSI	4.60	7.40	27.98	58400	57990	-

Note: Tubes are available for tubeless sizes. Metal stem tubes, flaps and rimstrips on pages 74 and 75. Prices do not include freight. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim width and inflation pressure. These tires are designed for vehicles manufactured prior to 1976. See page 81 for details.



ORIGINAL EQUIPMENT TIRES

This selection of BFGoodrich Silvertown bias ply tires includes sizing for classic Corvettes, Ford Thunderbirds, Cadillacs and more. With redlines and various whitewall configurations, this product line covers a huge group of specific applications.



SHOP NOW!
Scan Code With
Phone Camera



TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
760-15	B	1 WW	5.5-6	4 PLY POLY	1710@32PSI	5.00	7.90	28.66	59150	-	-
760-15	B	2 1/2 WW	5.5-6	4 PLY POLY	1710@32PSI	5.00	7.90	28.66	59200	-	-
760-15	B	3 3/8 WW	5.5-6	4 PLY POLY	1710@32PSI	5.00	7.90	28.66	59400	-	-
775-15	C	5/8 WW	4.5-5	4 PLY POLY	1490@32PSI	4.50	7.65	27.42	60200	60150	-
775-15	C	1 WW	4.5-5	4 PLY POLY	1490@32PSI	4.50	7.65	27.42	60400	-	-
775-15	G	3/8 RED	4.5-5	4 PLY POLY	1490@32PSI	4.50	7.65	27.42	59800	-	-
775-15	G	3/8 GOLD	4.5-5	4 PLY POLY	1490@32PSI	4.50	7.65	27.42	60000	-	-
815-15	D	1 WW	5-6.5	4 PLY POLY	1610@32PSI	5.00	8.09	27.72	60970	-	-
815-15	D	1WW+3/8 RED	5-6.5	4 PLY POLY	1610@32PSI	5.00	8.09	27.72	60980	-	-
820-15	B	1 WW	6-6.5	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	61400	-	-
820-15	B	2 1/2 WW	6-6.5	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	61600	-	-
820-15	B	3 5/8 WW	6-6.5	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	61800	61375	-
855-15	B	5/8 WW	6-6.5	4 PLY POLY	1710@32PSI	5.00	7.90	28.66	60550	-	-
855-15	B	1 WW	6-6.5	4 PLY POLY	1710@32PSI	5.00	7.90	28.66	60554	-	-
900-15	E	1 WW	6.5-7	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	62000	-	-
900-15	I	3/8 DUAL	6.5-7	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	62005	-	-
900-15	E	3/16+1/2+3/16 TRIPLE	6.5-7	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	62010	-	-
J78-15	J	7/8 WW	5.5-7	4 PLY BELT	1860@32PSI	6.00	8.70	28.72	62857	-	-
J78-15	K	5/16 DUAL	5.5-7	4 PLY BELT	1860@32PSI	6.00	8.70	28.72	62858	-	-
L78-15	J	1 WW	5.5-8	4 PLY BELT	1970@32PSI	5.88	8.85	29.30	62870	-	-
L78-15	F	1/8+5/16 DUAL	5.5-8	4 PLY BELT	1970@32PSI	5.88	8.85	29.30	62880	-	-
600-16	H	3 1/2 WW	4-4.5	4 PLY POLY	1400@32PSI	4.63	6.25	28.36	64400	64600	85640

1932 Ford Roadster
Tires: BF Goodrich
Silvertown Wide Whitewall
Front: 500-15
Rear: 820-15



TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
650-16	H	3 3/4 WW	4.5-5	4 PLY POLY	1580@32PSI	4.97	6.80	29.30	66400	67000	85640
700-16	L	4 WW	4.5-5.5	6 PR POLY	1900@36PSI	5.38	7.40	30.60	67660	67670	85372
750-16	L	4 1/8 WW	5-6	8 PR POLY	1850@48PSI	5.50	8.20	31.45	68250	-	85372
825-16	L	4 5/8 WW	5-6	8 PR POLY	2030@46PSI	6.00	8.79	32.43	68775	-	85372
750-17	L	4 1/2 WW	5.5-6	8 PLY POLY	1646 @36PSI	5.50	8.00	33.50	70905	70906	86260
550-18	N	3 WW	3	4 PLY POLY	1000@32PSI	4.30	5.65	29.00	713960	713950	86100
475/500-19	M	2 3/4 WW	2.5-3	4 PLY POLY	895@32PSI	3.75	5.50	30.50	73000	73200	86400
550-19	N	3 1/4 WW	2.5-3	4 PLY POLY	1040@32PSI	4.30	5.90	31.10	74172	74170	86400
600/650-19	N	3 3/4 WW	3-3.5	6 PR POLY	1430@36PSI	4.25	6.00	31.40	74260	74250	86600
550-20	N	3 1/4 WW	3	4 PLY POLY	1075@32PSI	4.30	5.90	32.16	75515	75510	87000
600-20 (30X5)	N	3 1/2 WW	3	6 PR POLY	1350@36PSI	4.75	6.00	32.40	75540	75550	86600
700-20 (34X7)	L	3 1/4 WW	5-5.5	8 PR POLY	1980@42PSI	4.89	6.90	35.00	77220	77240	86600
440/450-21	M	2 1/2 WW	2.5-3	4 PLY POLY	855@32PSI	3.75	4.75	29.75	77600	77800	87000
600-21	N	3 1/2 WW	3-3.75	6 PR POLY	1350@36PSI	4.74	6.00	33.40	78972	78970	86600
600-22	N	3 1/2 WW	3-3.75	6 PR POLY	1350@36PSI	4.74	6.00	33.40	79285	79280	87500
500-24	N	BW	2.5-3	6 PLY POLY	1035@36PSI	4.00	5.10	34.00	-	81710	87500
36X6(700X24)	O	BW	5-6	10 PR NYL	2400@65PSI	5.00	7.50	40.20	-	81775	87501
38X7(750X24)	O	BW	5.5-7	10 PR NYL	2550@85PSI	6.00	7.50	40.60	-	81800	87501
40X8 (900X24)	O	BW	5.5-7	10 PR NYL	3660@65PSI	7.20	8.20	42.50	-	82105	87701
40X8 (900X24)	O	BW	5.5-7	16 PR NYL	4850@105PSI	7.20	8.20	42.50	-	82104	87701

Note: Tubes are available for tubeless sizes. Metal stem tubes, flaps and rimstrips on pages 74 and 75. Prices do not include freight. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim width and inflation pressure. These tires are designed for vehicles manufactured prior to 1976. See page 81 for details.

1910 Thomas Flyer
Tires: Goodrich Silvertown
Cord 36x4 1/2



GOODRICH[™] SILVERTOWN CORD

Goodrich Silvertown Cord tires are the most authentic High-Pressure tires on the market. The tires are constructed with premium polyester cord and offer correct fitment on a wide range of Brass Era vehicles.



SHOP
NOW!
Scan Code
With Phone
Camera



BRASS
& NICKEL
HARDWARE
SEE PAGE 74



SEE PAGE 75

TIRE SIZE	RIM DIAMETER	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	BW ITEM #	RUBBER STEM TUBE ITEM #	METAL STEM TUBE ITEM #	FLAP ITEM #
32X4 1/2	23"	6 PR POLY	1250@65PSI	3.38	4.75	32.88	80000	87500	87526	88700
33X5	23"	6 PR POLY	1700@65PSI	4.00	5.63	34.88	80400	87500	87526	88700
32X4***	24"	6 PR POLY	1000@60PSI	3.00	4.13	32.38	81200	87400	87527	88800
33X4 1/2	24"	6 PR POLY	1250@60PSI	3.50	5.00	33.56	81600	87500	87526	88800
34X5***	24"	8 PR POLY	1700@65PSI	4.00	5.91	35.81	81730	87500	87526	88800
33X4***	25"	6 PR POLY	1000@60PSI	3.00	4.13	33.59	82700	87400	87427	88900
34X4 1/2	25"	8 PR POLY	1250@65PSI	3.50	5.00	34.56	82860	87500	87526	88900
35X5	25"	8 PR POLY	1700@70PSI	4.00	6.00	36.50	83100	87500	87526	88900
34X4	26"	6 PR POLY	1000@60PSI	3.13	4.13	35.20	83250	87400	87427	89000
36X4 1/2***	27"	6 PR POLY	1250@65PSI	3.50	4.75	36.80	83500	874251	874254	89100
37X5	27"	8 PR POLY	1700@65PSI	4.00	5.51	38.00	84000	874251	87351	89100
36X4***	28"	6 PR POLY	1000@60PSI	3.00	4.13	36.80	84250	874251	874254	89100

Note: Silvertown Cord® tires are straight-side high-pressure tires constructed with premium polyester cord. (These are not clincher tires.) All high pressure tires should have correct tire flaps. See page 75 for authentic dust covers and flaps. These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. ***The factory has discontinued producing whitewalls, once the existing inventory is depleted the above listed whitewalls will also be discontinued. *Cosmetic Blemished Tire.



BIAS PLY

Michelin bias ply tires are the most authentic choice for high-end automotive restorations and vintage race cars. The Double Rivet (DR) is a popular option for many European luxury sedans from the 1920's and 1930's. The TB and PB series race tires offer excellent fitment and performance on vintage race cars.



SHOP NOW!
Scan Code With
Phone Camera

TIRE SIZE	PHOTO	TREAD DESIGN	RIM DIAMETER	RECOMMENDED RIM WIDTHS	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
600/650-16 NOS*	A	SCSS	16	4.5-5	6.7	28.3	66300	85640
130/140X40	A	SCSS	40cm	110mm - 140mm	5.5	27.3	63155	85640
150/160X40	A	SCSS	40cm	150mm- 160mm	6.4	29.0	63160	85640
650/700-17	B	DR	17	4	6.7	31.0	70600	86201
12X45	B	DR	45cm	110mm-120mm	5.0	28.2	71225	86100
13X45	B	DR	45cm	130mm-140mm	5.2	28.8	71230	86100
14X45	B	DR	45cm	130mm-140mm	5.4	28.8	71235	86100
15/16-45	B	DR	45cm	150mm-160mm	6.6	30.6	71236	86100
475/525-18	B	DR	18	3.25	5.3	28.7	71373	86100
550-18	B	DR	18	3-4.5	5.6	30.0	71375	86100
600/650-18	B	DR	18	3-5	6.3	31.0	72500	86202
400/450-19	B	DR	19	2.5-3.5	4.6	28.4	72898	86190
475/500-19	B	DR	19	2.5-3.5	4.7	27.9	72899	86190
525/600-19	B	DR	19	2.5-3	5.9	31.0	72901	86820
650/700-20	B	DR	20	2.75-3	6.5	33.1	77210	86820
550/600-21	B	DR	21	2.5-3	6.8	35.3	78964	86820
700-21	B	DR	21	3-3.75	6.7	33.8	79050	86820



1980 Fiat 131 Abarth Tribute Car
Tires: Michelin TB5 23/62-15



TB5, TB15 & PB20

TIRE SIZE	CROSS REFERENCE	PHOTO	COMPOUND	RIM WIDTHS	LOAD/ SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	CIRC.	ITEM #
16/53-13 NOS*	185/55VR13	C	TB5	5-6	72V	6.80	21.20	1640MM	71218
16/53-13	185/55VR13	C	TB15	5-6	72V	8.80	20.90	1635MM	71219
20/53-13	235/45VR13	C	TB5 F	7-8.5	77V	8.80	20.90	1635MM	731694
20/53-13	235/45VR13	C	TB15	7-8.5	77V	8.80	20.90	1635MM	71224
17/58-14	185/60VR14	D	TB5 F	5-6.5	89V	7.48	23.00	1835MM	70212
18/60-15	215/55VR15	D	TB5 F	6-7.5	79V	8.50	24.20	1885MM	467662
18/60-15	215/55VR15	D	TB5 R	6-7.5	79V	8.50	24.20	1885MM	467663
18/60-15	215/55VR15	C	TB15	6-7.5	79V	8.50	24.20	1912MM	71222
18/6015	205/55HR15	C	PB 20	5.5-7.5	79V	8.60	23.97	2209MM	71237
23/59-15	265/40VR15	D	TB5 R	8.5-10	92W	10.60	23.30	2011MM	008050
23/62-15	270/45R15	C	TB15	8.5-10.5	86V	10.60	24.50	1923MM	71227
23/62-15	270/45R15	D	TB5 F	8.5-10.5	86V	10.60	24.50	1923MM	008061
23/62-15	270/45R15	D	TB5 R	8.5-10.5	86V	10.60	24.50	1923MM	008062
23/62-15	275/45HR15	C	PB 20	8.5-10.5	86V	10.47	27.72	2209MM	71238
26/61-15	295/40VR15	C	TB15	10-11.5	87V	11.60	25.30	1891MM	71231
26/61-15	295/40VR15	D	TB5 F	10-11.5	87V	11.60	25.30	1891MM	187650
26/61-15	295/40VR15	D	TB5 R	10-11.5	87V	11.60	25.30	1891MM	187561
29/61-15	335/35VR15	D	TB5 R	11-13	93V	13.20	24.10	1903MM	447087

Note: TB5=Dry Performance. TB15 & TB20= Rain Tires. TB5F= Soft Compound. TB5R= Medium Compound. These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. *NEW OLD STOCK. These tires may have been manufactured ten or more years ago, but they have never been mounted or used. To the best of our knowledge, they have been stored in a warehouse environment and have not been subjected to ultraviolet light. These tires are no longer produced, and are only offered to provide your vehicle with original stock tires for appearance purposes. This stock may represent the only market source for these items at the present time. Accordingly, we offer no warranties on these products.



EXCELSIOR® VINTAGE TIRES

SHOP NOW!
Scan Code
With Phone
Camera



If you're looking for an obscure fitment for a vintage European car, the Excelsior bias ply product line has it covered. With a big range of sizes, including metric Beaded Edge tires, Excelsior tires are authentically constructed with durable nylon ply cords.

EUROPEAN STYLE TIRES

TIRE SIZE	PHOTO	RIM DIAMETER	RIM WIDTHS	PLY RATING	LOAD/SPEED INDEX	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
440-10 11/2 WW	H	10"	3	4 PLY POLY	68L	3.00	4.00	17.75	506642	85040
500/520-14	C	14"	3.5-4	4 PLY NYLON	74P	3.75	4.31	23.75	61975	85325
400/425-15	C	15"	3	4 PLY NYLON	76P	2.62	3.5	23.25	61980	85355
550-15	C	15"	3-3.5	4 PLY NYLON	72P	4.25	5.25	25.87	556642	-
640-15	C	15"	4.5-5	6 PLY NYLON	78P	4.7	6.75	26.80	566042	-
670-15	C	15"	4.5-5	6 PLY NYLON	82P	4.75	7	27.60	568799	-
500/525-16	C	16"	3-3.25	4 PLY NYLON	74P	3.62	4.12	26	63650	85363
550-16	C	16"	3.25-4	4 PLY NYLON	82P	4.12	4.50	26.75	639760	85640
600-16	C	16"	4-4.5	6 PLY NYLON	95P	4.12	5.00	28.00	643530	85640
650-16	C	16"	4-4.5	6 PLY NYLON	87P	4.60	6.70	28.5	663495	85640
400/425-17	F	17"	3-3.25	4 PLY NYLON	69P	3.90	4.30	25.75	64745	86201
450-17	D	17"	3-3.25	4 PLY NYLON	69P	3.9	4.5	26	688510	86271
475/500-17	C	17"	3-3.25	4 PLY NYLON	79P	3.62	3.75	27.12	64755	86100
525/550-17	C	17"	3-3.25	4 PLY NYLON	80P	4.00	4.5	28.5	64765	86100
450-18	D	18"	2.5-3	4 PLY NYLON	69P	3.5	4.12	27.25	71360	86275
475/500-18	C	18"	2.5-3	4 PLY NYLON	80P	3.75	5.65	28.62	69948	86100
525/550-18	C	18"	3.25	6 PLY NYLON	88P	4.5	6.25	29.86	64770	86100
600/650-18	C	18"	3.25-3.5	6 PLY NYLON	90P	4.37	5.75	30.25	64780	86100
730X130 BE**	A	470mm	67mm	4 PLY NYLON	76M	3	4.7	28.30	71212	86100
350/400-19	C	19"	2.5-3	4 PLY NYLON	56P	3.25	3.75	27	728935	86280
450-19	D	19"	2.5-3	4 PLY NYLON	69P	3.75	4.25	27.75	72900	86285
475/500-19	C	19"	2.5-3	4 PLY NYLON	76P	3.50	4.12	29.00	738181	86400
525/550-19	C	19"	2.5-3	6 PLY NYLON	90P	4.00	4.50	30.50	74181	86400
475/500-20	C	20"	2.5-3	4 PLY NYLON	77P	3.50	4.5	30.5	74520	86400
710X90 BE**	A	530mm	50mm	4 PLY NYLON	76M	2.5	3.63	27.25	77550	87505
450/475-21	C	21"	2.5-3	4 PLY NYLON	75P	3.87	4.50	30.75	74525	87000
500/525-21	C	21"	2.5-3	6 PLY NYLON	84P	3.75	4.5	31.87	75021	87000
765X105	A	555mm	67mm	4 PLY NYLON	76M	2.83	4.25	30.83	79070	87504
28X3 BE*	B	22"	1.77	4 PLY NYLON	53M	2.30	2.80	27.90	79250	87100
760X90 BE**	A	580mm	50mm	4 PLY NYLON	76M	2.60	3.7	30.3	79112	87050
820X120 BE**	A	580mm	67mm	6 PLY NYLON	89M	3.00	4.25	31.25	79150	87504
820X120 GRAY	A	580mm	67mm	6 PLY NYLON	89M	3.00	4.25	31.25	79152	87504
30X3 1/2 BE	B	23"	2.025	4 PLY NYLON	76M	2.80	4	31.5	79600	87200
30X3 1/2 SS*	C	23"	2.025	4 PLY NYLON	76M	2.80	3.93	31.53	79595	87200
440-23	G	23"	2.5	4 PLY NYLON	72P	3.30	4.4	31.89	79597	87200
500-23	E	23"	2.75	6 PLY NYLON	81P	4.00	5.25	33.3	81523	87500

EUROPEAN STYLE TIRES (cont.)

TIRE SIZE	PHOTO	RIM DIAMETER	RIM WIDTHS	PLY RATING	LOAD/SPEED INDEX	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
815X105 BE**	A	605mm	62mm	6 PLY NYLON	80M	3.00	3.88	31.63	80560	87400
30X3 BE*	B	24"	2.025	4 PLY NYLON	72M	2.30	2.8	30.00	80750	87300
500-24	E	24"	2.75	6 PLY NYLON	82P	4	5.25	34.50	81524	87500
895x135 BE**	A	625mm	77mm	6 PLY NYLON	99M	3.25	5.25	33.00	80550	87501
810x90 BE**	A	630mm	50mm	4 PLY NYLON	76M	2.70	3.7	32.4	79113	87200
880X120 BE**	A	640mm	67mm	6 PLY NYLON	89M	3.00	4.45	33.75	82450	87508
875X105 BE**	A	665mm	62mm	6 PLY NYLON	88M	3.00	4.00	34.25	83205	87502

RACING TIRES



Riley Race Car
Tires: Excelsior Comp H 500-19

Excelsior Competition tires are speed rated bias ply tires with the famous triple-stud tread pattern, designed for vintage open-wheel race cars. With proven quality and safety, these tires are DOT and ECE approved. They are also eligible for competition in FIA and VSCC organizations.

TIRE SIZE	PHOTO	RECOMMENDED RIM WIDTHS	LOAD/SPEED INDEX	SPEED RATING	PLY RATING	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
450/500-18	I	2.5-3.25	79H	130	8 PLY NYLON	3.94	5.12	27.80	713854	86276
550-18	I	4	88H	130	6 PLY NYLON	4.50	6.50	29.10	713855	86195
600/650-18	I	4	80H	130	6 PLY NYLON	4.30	6.18	30.10	71387	86582
700-18	I	5	84H	112	6 PLY NYLON	4.57	6.89	32.09	71388	86582
400-19	I	3.5	72H	130	4 PLY NYLON	3.25	4.70	27.90	728938	86276
450-19	I	3.5	75H	130	4 PLY NYLON	3.50	5.30	28.70	728982	86276
500-19	I	4	79H	130	4 PLY NYLON	3.75	6.00	30.00	74178	86585
550/600-19	I	4	88H	130	8 PLY NYLON	4.30	5.86	31.00	74179	86430
650-19	I	3.25-4.25	92H	130	8 PLY NYLON	4.57	6.42	32.95	742322	86755
650/700-20	I	4-5	103S	112	8 PLY NYLON	4.72	6.30	33.78	76115	87040
500/525-21	I	3.50-4	84H	130	6 PLY NYLON	3.86	5.50	31.89	75011	87030
550/600-21	I	3.25-4	88H	130	6 PLY NYLON	4.41	6.50	33.27	75022	87030
700-21	I	5-5.5	103S	112	8 PLY NYLON	4.72	6.77	35.39	78968	87040

**BE = Beaded Edge (clincher) *SS = Straight Side.
Note: These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation. Please inquire because many applications using these tires are special built, racing or European cars. Please be absolutley sure of tube valve placement first before discussing with our vintage tire specialist.





O.E. TIRES

With O.E. fitments for thousands of applications from the late 1940's through the late 1960's, the U.S. Royal product line is one of the most authentic bias ply tires on the market.



SHOP NOW!
Scan Code
With Phone
Camera




1964 Pontiac GTO
Tires: US Royal Redline
750-14

TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
650-13	A	1	4.5-5	4 PLY POLY	1150@32PSI	4.10	6.60	24.58	51035	-	-
650-13	A	1 7/8	4.5-5	4 PLY POLY	1150@32PSI	4.10	6.60	24.58	51040	-	-
695-14	F	5/8	5-6	4 PLY POLY	1230@32PSI	4.00	7.00	26.60	51380	-	-
695-14	F	7/8	5-6	4 PLY POLY	1230@32PSI	4.00	7.00	26.60	51385	-	-
695-14	F	DUAL RED	5-6	4 PLY POLY	1230@32PSI	4.00	7.00	26.60	51390	-	-
750-14	C	REDLINE	5-5.5	4 PLY POLY	1500@32PSI	4.40	7.65	27.02	52380	-	-
775-14	C	3/8 RED	5.5-6	4 PLY POLY	1500@32PSI	4.40	7.65	27.02	53015	-	-
560-15	D	1	4.5-5.5	4 PLY POLY	970@32PSI	3.75	4.80	25.88	55673	55670	-
560-15	D	2 1/4	4.5-5.5	4 PLY POLY	970@32PSI	3.75	4.80	25.88	55675	-	-
670-15	A	1	4.5-5	4 PLY POLY	1450@32PSI	4.25	7.00	27.50	57620	-	-
670-15	B	2 1/2	4.5-5	4 PLY POLY	1450@32PSI	4.25	7.00	27.50	57630	-	-
670-15	B	2 11/16	4.5-5	4 PLY POLY	1450@32PSI	4.25	7.00	27.50	57640	57610	-
710-15	B	3 1/4	5-5.5	4 PLY POLY	1550@32PSI	4.40	7.00	27.75	58570	-	-
820-15	G	1	6-6.5	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	619903	-	-
820-15	G	2 1/4	6-6.5	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	619905	-	-
820-15	G	2 3/4	6-6.5	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	61991	-	-
820-15	G	3 1/2	6-6.5	4 PLY POLY	1920@32PSI	5.40	8.50	29.59	61993	-	-
840/820-15	D*	1	6-6.5	4 PLY POLY	1920@32PSI	5.20	8.40	29.60	61995	-	-
600-20	E	3 1/2	3	6 PR POLY	1350@36PSI	4.25	6.00	32.25	75570	75580	86600
1000-20	H	5 1/4	4-5	12 PR NYLON	5430@85PSI	7.50	10.95	41.48	75585	-	86744

Note: These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. Dimensions are based on non-scientific measurements of inflated tires.
*Tread Similar to D.



Coker Classic bias ply tires cover a wide range of applications, from Brass Era cars, all the way into the mid 1970's with Alphanumeric sizing. Custom car builders love the extra wide whitewalls on the H78-15 and L78-15.

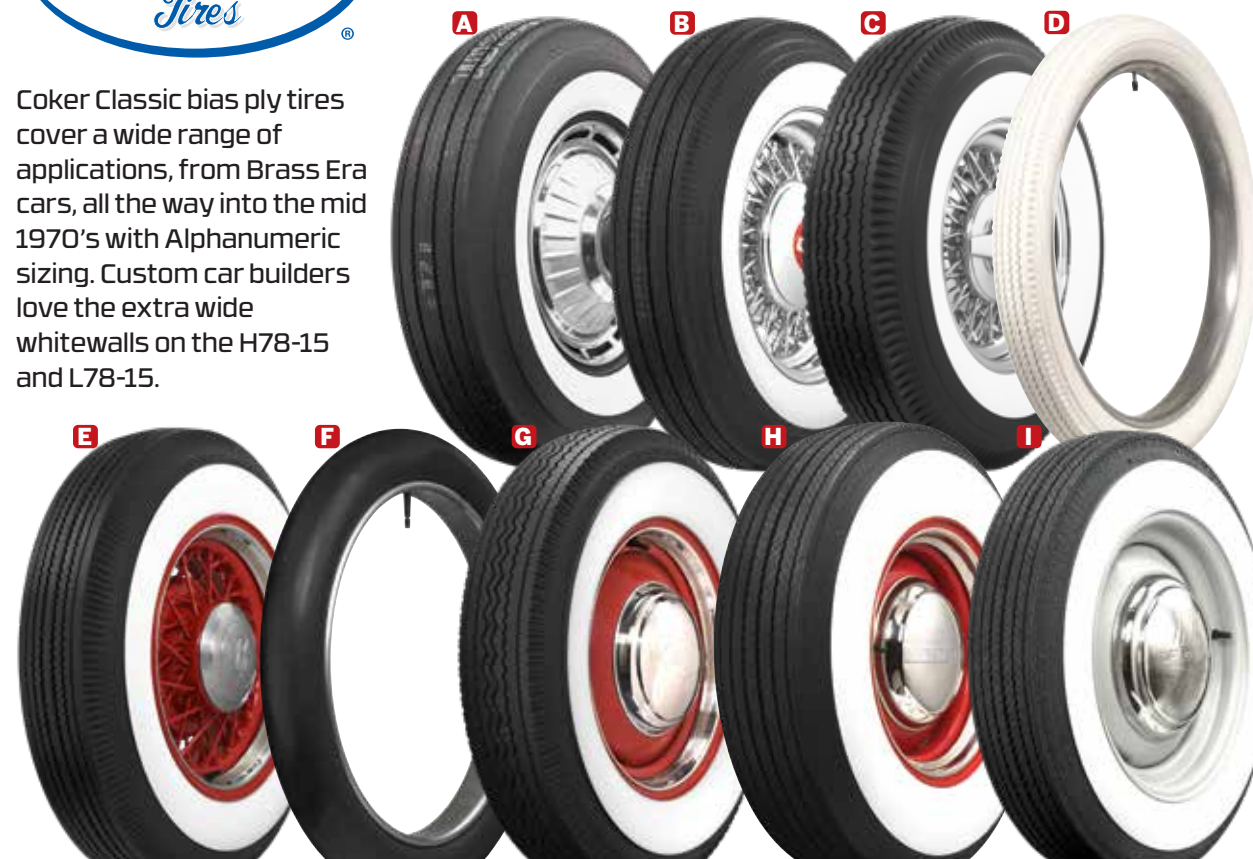

TIRE SIZE	PHOTO	SIDEWALL	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
650-13	A	1	4.5-5	4 PLY POLY	1150@32PSI	4.50	6.60	24.58	51050	-	-
650-13	A	2 1/4	4.5-5	4 PLY POLY	1150@32PSI	4.50	6.60	24.58	51100	-	-
750-14	B	2 1/4	5-5.5	4 PLY POLY	1580@32PSI	4.50	7.65	27.02	52400	-	-
E78-14	H	2 3/8	4.5-7	4 PLY POLY	1400@32PSI	5.10	7.65	26.60	54667	-	-
F78-14	H	2 3/8	5-7	4 PLY POLY	1500@32PSI	5.25	7.90	27.06	54820	-	-
G78-14	H	2 1/4	5-7	4 PLY POLY	1620@32PSI	5.38	8.35	27.10	55480	-	-
G78-14	H	3 1/2	5-7	4 PLY POLY	1620@32PSI	5.38	8.35	27.10	55481	-	-
H78-14	H	2 1/2	5.5-8	4 PLY POLY	1770@32PSI	5.75	8.86	27.60	55500	-	-
560-15	I	2 3/4	4.5-5.5	4 PLY POLY	970@32PSI	4.00	5.96	25.88	55700	-	-
670-15	B	2 3/4	4.5-5	4 PLY POLY	1550@32PSI	4.50	6.70	27.25	57700	-	-
760-15	C	3	5.5-6	4 PLY POLY	1820@36PSI	4.90	7.50	28.70	59600	-	-
800-15	B	2 1/2	6-6.5	4 PLY POLY	1800@32PSI	4.70	8.30	29.08	60600	-	-
800-15	B	3	6-6.5	4 PLY POLY	1800@32PSI	4.70	8.30	29.08	60800	-	-
G78-15	H	2 3/4	5-7	4 PLY POLY	1620@32PSI	5.63	8.05	27.68	62800	-	-
G78-15	H	3 1/4	5-7	4 PLY POLY	1620@32PSI	5.63	8.05	27.68	62803	-	-
H78-15	H	3	5.5-7	4 PLY POLY	1770@32PSI	5.74	8.55	28.36	62855	-	-
H78-15	H	4 7/16	5.5-7	4 PLY POLY	1770@32PSI	5.74	8.55	28.36	62861	-	-
L78-15	H	3	5.5-8	4 PLY POLY	1970@32PSI	5.88	8.85	29.30	62900	-	-
L78-15	H	4	5.5-8	4 PLY POLY	1970@32PSI	5.88	8.85	29.30	62950	62925	-
600-16	E	3	4-4.5	4 PLY POLY	1400@32PSI	4.13	6.25	28.30	65500	65700	85640
650-16	G**	2 1/2	4.5-5	4 PLY POLY	1580@32PSI	4.38	6.80	29.26	77226	77227	85640
28X3 CL*	D	All White	1.77	4 PLY NYLON	450@65PSI	2.25	2.75	27.88	79225	79200	87100
30X3 CL*	F	BLK SMOOTH	1.75	4 PLY NYLON	450@65PSI	2.25	2.95	30.00	-	80700	87300

Note: Coker Classics are made in the USA. Prices do not include freight. Tubes, flaps and rimstrips are on page 75. These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. Dimensions are based on non-scientific measurements of inflated tires. *Clincher Tires. Imported. ** This is a Garfield brand tire.

SHOP NOW!
Scan Code
With Phone
Camera





SHOP NOW!
Scan Code With Phone Camera

STREET & STRIP TIRES

Take a trip back to the 1970's with Pro Trac Performance Tires! Available in eight sizes that range from front runners to gigantic 21-inch wide steam rollers, this product line is perfect for a street machine, Pro Street build or Day 2 muscle car.



1955 Chevrolet
Tires: Pro Trac Front: 560-15 Rear: N50-15



TIRE SIZE	CROSS REFERENCE	PHOTO	RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH	ITEM #
560-15	25x6-15	D	4-5	4 PLY POLYESTER	970@32PSI	4.00	5.96	25.88	11/32	55515
P215/75-15	28x8-15	E	5.5-7.5	POLY/FIBERGLASS	1742@32PSI	3.98	7.30	27.80	10/32	71980
P235/60-15	27X10-15	C	6.5-8	POLY/FIBERGLASS	1642@35PSI	8.50	9.70	26.65	11/32	72000
P275/60-15	28X11-15	C	8-10	POLY/FIBERGLASS	2149@32PSI	9.50	10.50	27.92	12/32	72100
N50-15	28X13-15	B	8-10	POLY/FIBERGLASS	2210@32PSI	11.30	12.65	27.87	12/32	72146
S375/60-15	33X15-15	A	10-12	POLY/FIBERGLASS	2227@32PSI	12.75	15.00	32.50	10/32	72150
S445/50-15	33X18-15	A	12-14	POLY/FIBERGLASS	2436@32PSI	15.00	17.80	32.50	10/32	72175
S515/45-15	33X21-15	A	14-16	POLY/FIBERGLASS	2910@32PSI	17.20	20.70	32.80	10/32	72199

Note: Never mix tires of different construction (radial and bias) on the same vehicle. Rims designed for bias tires can fail because of the extra stress placed on them with radial tires. Interchangeability is not implied nor is it always possible because of rim sizes, wheel well clearance, speed/load ratings and handling characteristics. Vehicles designed for bias ply tires may drive considerably different on radial tires. Extreme caution must be exercised. Please refer to the auto manufacturer's recommendations when replacing bias ply tires with radials. (*Dimensions are based on non-scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation.) These tires are designed for vehicles manufactured prior to 1976. See page 81 for details.

PREMIUM SPORT LOWRIDER TIRES

This is the Ultimate Lowrider Tire! These tires are 8-ply rated and offer increased safety and reliability. The Whitewall size and placement are exact from back in the day.



SHOP NOW!
Scan Code With Phone Camera



8-PLY RATED!

TIRE SIZE	WW WIDTH	RECOMMENDED RIM WIDTHS	PLY RATING	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #
520-13	5/8	3.5-4	8 PR NYLON	1100@60PSI	4.00	6.00	23.10	506544
520-13	11/4	3.5-4	8 PR NYLON	1100@60PSI	4.00	6.00	23.10	506542
520-14	5/8	3.5-4	8 PR NYLON	1230 @60PSI	4.00	5.78	24.30	506547
520-14	11/4	3.5-4	8 PR NYLON	1230 @60PSI	4.00	5.78	24.30	506543

Note: Dimensions are based on non scientific measurements of inflated tires. Dimensions can vary based on rim size and inflation. All Premium Sport tires are tubeless and are designed for vehicles manufactured prior to 1976. See page 81 for details. It is extremely important these tires are mounted and balanced by trained tire service technicians. These tires are recommended for rims widths from 3.5 - 4 inches, mounting on rims exceeding this width could result in irregular tread wear.



Ensign tires are geared toward race-inspired European cars, including early MG's and other 1940's sports cars. With nylon cord material, these tires are 100 percent authentic to the era.



SHOP NOW!
Scan Code With Phone Camera

TIRE SIZE	PHOTO	RIM DIAMETER	TIRE MODEL	RIM WIDTHS	LOAD/SPEED NDEX	SECTION WIDTH	OVERALL DIAMETER	ITEM #
600/650-17		17	ENSIGN F4 (made in UK)	4J	99R	192MM	722MM	70550
350-18	A	18	ENSIGN TRIALS UNIVERSAL	WM2	N	92MM	640MM	71309
450-19	B	19	ENSIGN Triple(made in UK)ROAD/RACE	2.5-3.5	H	130MM	734MM	72955
24x2 1/4		19.5	Ensign Two Stud	47MM	42L	55MM	640MM	74686
26x3		20	Ensign Two Stud	61MM	62L	85MM	705MM	74702
300S20	C	20	ENSIGN UNIVERSAL (Road pattern)	WM1/WM2	S	80MM	670MM	74776
300S21	C	21	ENSIGN UNIVERSAL (Road pattern)	WM1/WM2	S	80MM	715M	74777
325-19	C	19	ENSIGN UNIVERSAL (Road pattern)	WM2/WM3	S	85MM	660MM	728921
350-19	A	19	ENSIGN TRIALS UNIVERSAL	WM3	N	92MM	685MM	728933
350-19	C	19	ENSIGN UNIVERSAL (Road pattern)	WM3	S	92MM	680MM	728934
400-19	A	19	ENSIGN TRIALS UNIVERSAL	WM3	N	97MM	690MM	728987
710X90		710X90	Chevron Cord	68MM	76L	95MM	695MM	77526
760X90		760X90	Chevron Cord	68 MM	76L	93MM	770MM	79115
810X90		810X90	Chevron Cord	68 MM	76L	93MM	823MM	79117
820X120		820X120	Chevron Cord	90MM	80L	121MM	828MM	79160
895X135		895X135	Chevron Cord	100MM	98L	135MM	886MM	80555
815X105		815X105	Chevron Cord	82MM	80L	106MM	843MM	80573
880X120		880X120	Chevron Cord	90MM	89L	121MM	889MM	82455

ECONOMY MODEL A TIRES

Get the most bang for your buck with our Economy Model A tires. They are available only in blackwall, and we have fitment options for 19- and 21-inch wheels.



SHOP NOW!
Scan Code With Phone Camera



TIRE SIZE	RIM WIDTHS	CONST.	MAX LOAD CAPACITY	TREAD WIDTH	SECTION WIDTH	DIAMETR	ITEM #	TUBE ITEM #
475/500-19	2.5-3	4 Ply Nylon	895@32PSI	4.0	4.5	30.0	73320	86400
450/475-21	2.5-3	4 Ply Nylon	895@32PSI	3.5	4.0	31.0	78705	87000

HARTFORD



SHOP NOW!
Scan Code With Phone Camera

VINTAGE AIRPLANE TIRES

Did you know we make vintage airplane tires? We have limited supplies of these all-smooth tires, which are for display purposes only.

TIRE SIZE	ITEM #	PRICE	TUBE #
30 x 5	74725	423.00	87000
26 x 4 (clincher)	71290	296.00	86271



ITEM #79258

SNOW BIRD PADDLE TIRE

This ARPS Corporation 28x4.75-19 paddle tire is another obscure choice from our huge inventory.



SHOP NOW!
Scan Code With Phone Camera



ITEM #50188

GOLF CART TIRE

This 18x8.50-8 golf cart tire features a 2-1/2-inch whitewall, to give your golf car the perfect amount of classic styling.



SHOP NOW!
Scan Code With Phone Camera



1937 Chevrolet Truck
Tires: Firestone Truck 650-20



SHOP NOW!
Scan Code With
Phone Camera

VINTAGE TRUCK TIRES

Our vintage truck tire selection is packed with common and obscure sizes, ranging from highway treads to off-road treads and everything in between. Brands include STA, Firestone, Deka, Tornel and many more!



TIRE SIZE	PHOTO	DESCRIPTION	RIM WIDTHS	MAX LOAD CAPACITY	LOAD RANGE	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
670-15	K	STA TRANSPORT	4.5-5	1530@45PSI	C	5.40	7.40	28.50	579991	85140
700-15	K	STA TRANSPORT	5-5.5	1720@45PSI	C	5.50	7.90	29.60	59131	62241
700-15	C	STA TRAXION	5-5.5	2040@60PSI	C	5.50	7.90	30.00	59132	62241
H78-15	C	STA TRAXION	5.5-7	1830@45PSI	C	5.75	8.50	29.20	62854	-
L78-15	C	STA TRAXION	5.5-8	2400@65PSI	D	7.30	9.00	30.00	62962	-
525-16	E	DEKA	4-4.25	902@30PSI	B	4.30	5.20	27.80	63970	85363
600-16	A	FSTN KNOBBY	4-4.5	1400@32PSI	B	4.60	6.30	27.90	643507	85640
650-16	A	FSTN KNOBBY	4.5-5	1580@32PSI	B	5.00	7.50	29.40	663510	85366
650-16	D	STA TRAXION	4.5-5	1610@45PSI	C	5.00	7.20	29.40	67640	85366



TIRE SIZE	PHOTO	DESCRIPTION	RIM WIDTHS	MAX LOAD CAPACITY	LOAD RANGE	TREAD WIDTH	SECTION WIDTH	OVERALL DIAMETER	ITEM #	TUBE ITEM #
650-16	O	TORNEL HWY**	4.5-5	1610@45PSI	O	5.50	7.40	29.90	67639	85366
650-16	K	STA TRANSPORT	4.5-5	1610@45PSI	C	-	7.40	29.90	676391	85366
700-16	G	BFGOODRICH	4.5-5.5	1900@36PSI	C	5.40	7.40	30.60	67670	85366
700-16	H	FIRESTONE	4.5-5.5	1900@36PSI	C	5.40	7.60	30.40	676450	85366
700-16	N	TORNEL HIGHWAY**	4.5-5.5	1800@45PSI	C	5.40	7.60	30.40	71019	-
750-16	K	STA TRANSPORT	5-6	2440@60PSI	D	-	8.70	32.00	68754	-
750-16	K	STA TRANSPORT	5-6	2780@75PSI	E	-	8.70	32.00	68757	-
750-16	C	STA TRAXION	5-6	2440@60PSI	D	-	8.70	32.00	71031	-
750-16	H	FIRESTONE	5-6	1660@40PSI	D	4.90	7.40	31.00	682300	85372
900-16	J	STA SUPER LUG	5-6.5	3030@50PSI	D	8.70	10.40	36.30	71014	-
800-16.5	K	STA TRANSPORT	6-6.5	2045@60PSI	D	6.30	8.10	28.90	609024	-
875-16.5	K	STA TRANSPORT	6.5-6.75	2680@60PSI	D	7.00	8.80	29.40	609031	-
875-16.5	C	STA TRAXION	6.5-6.75	2045@60PSI	D	-	8.80	29.40	609033	-
950-16.5	M	STA TRANSPORT	6.5-6.75	2780@60PSI	D	-	9.50	31.10	609039	-
950-16.5	C	STA TRAXION	6.5-6.75	2780@60PSI	D	-	9.50	31.10	609043	-
10-16.5	K	STA TRANSPORT	8.25	2750@60PSI	D	-	10.20	30.70	609045	-
10-16.5	E	STA TRAXION	8.25	2750@60PSI	D	-	10.20	30.70	609047	-
12-16.5	K	STA TRANSPORT	9.75	3000@45PSI	D	-	11.90	32.80	775040	-
12-16.5	C	STA TRAXION	9.75	3000@45PSI	D	-	11.90	32.80	775046	-
600/650-17	M	DEKA	3.5-4	2040@75PSI	E	4.50	6.50	28.80	587101	86100
750-17	N	TORNEL HIGHWAY**	6-6.5	2800@75PSI	D	6.40	9.00	34.40	71016	86260
750-17	N	TORNEL HIGHWAY**	6-6.5	3170@90PSI	E	6.40	9.00	34.40	71013	-
750-17	B	TORNEL TRACTION	6-6.5	3170@90PSI	E	6.00	8.80	34.20	71017	86260
750-17	K	STA TRANSPORT	6-6.5	2800@75PSI	D	5.50	8.60	34.40	710161	86260
8-17.5	K	STA TRANSPORT	5.25	2455@65PSI	D	5.80	8.00	30.80	609027	-
8-17.5	C	STA TRAXION	5.25	2455@60PSI	D	-	8.00	31.40	710171	-
600/650-18	M	DEKA	3.5-4	2040@75PSI	E	4.50	6.20	31.20	587099	86100
700-18	K	STA TRANSPORT	6-6.5	2350@65PSI	D	5.30	7.30	33.00	72816	86100
750-18	C	STA TRAXION	6-6.5	2910@75PSI	D	-	9.00	35.00	72824	86260
750-18	M	DEKA**	6-6.5	2540@65PSI	D	8.50	8.70	34.60	587102	86260
600-20*	F	BF GOODRICH	5	1350@36PSI	C	4.70	6.00	32.40	75550	86600
600-20*	H	FIRESTONE	5	1400@50PSI	C	4.90	6.30	32.60	755200	86600
600-20	I	FSTN TRUCK	5	1850@60PSI	C	4.75	7.00	33.50	761399	86600
650-20	I	FSTN TRUCK	5	2120@60PSI	C	5.20	7.80	34.60	761400	86600
650-20*	H	FIRESTONE	5	2120@60PSI	C	5.20	7.80	34.60	761500	86600
700-20	I	FSTN TRUCK	5	3100@90PSI	E	5.25	7.50	35.50	761401	86600
700-20*	G	BFGOODRICH	5-5.5	1700@36PSI	C	4.90	6.90	35.00	77240	86600
750-20	K	STA TRANSPORT	5-5.5	3530@90PSI	E	6.80	8.90	37.40	77503	86600
900-22	O	AMERICAN CLASSIC	6.5-7	4925@80PSI	E	6.80	11.00	42.75	775050	86775
1000-22	N	STA TRANSPORT	7.5-8	5780@85PSI	F	-	10.39	43.20	775055	87045
36x6(700x24)	L	BFGOODRICH	5-6	2400@65PSI	E	5.00	7.50	40.20	81775	87501
38X7(750X24)	L	BFGOODRICH	5.5-7	2550@85PSI	E	6.00	7.50	40.60	81800	87501
40X8 (900X24)	L	BFGOODRICH	5.5-7	3660@65PSI	E	7.20	8.20	42.50	82105	87701
40X8 (900X24)	L	BFGOODRICH	5.5-7	4850@105PSI	H - 16 Ply	7.20	8.20	42.50	82104	87701

*Available in whitewall or black. 38x7 same as (750x24), 40x8 same as (900x24).
Note: Call for sizes not listed (minimum quantity may be required). All split rims require flaps. These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. Dimensions are based on non-scientific measurements of inflated tires. A small round recessed area is available for you to color if you want the tire to appear as on many original tires. **Imported.



MILITARY TIRES

When it comes to authenticity, our Military Tires are second to none. We offer Firestone Military tires in NDT and NDCC tread styles, as well as a Knobby tread for early Jeeps. You'll find a wide range of sizes in this product line.



Kaiser Military Truck
Tires: Firestone
NDT 900-16



SHOP NOW!
Scan Code
With Phone
Camera



SHOP NOW!
Scan Code
With Phone
Camera



ALL-TERRAIN T/A KO2

The All-Terrain T/A KO2 is a modern iteration of the original and iconic off-road tire that was Baja-proven from day one. Raised white letters offer great looks for classic or modern trucks, and these tires are 3PMS-rated for excellent winter traction.



1972 Chevrolet
K5 Blazer
Tires: BF Goodrich
All-Terrain T/A KO2
35 x 12.50R15

TIRE SIZE	DESCRIPTION	RIM WIDTHS	MAX LOAD CAPACITY	LOAD RANGE	TREAD DEPTH (32NDS)	SECTION WIDTH	OVERALL DIAMETER	ITEM #
LT245/75R17/E	Raised White Letters	6.5-7.5	3195@80 psi	E	15	9.8	31.5	700887
LT245/65R17/D	Raised White Letters	7.0-8.0	2405@65 psi	D	15	9.8	29.5	700885
LT305/70R16/E	Raised White Letters	8.0-9.5	3525@65 psi	E	15	12.2	32.8	700881
LT245/75R16/E	Raised White Letters	6.5-8.0	3042@80 psi	E	15	9.8	30.5	700874
LT235/85R16/E	Raised White Letters	6.0-7.5	3042@80 psi	E	15	9.3	31.7	700872
LT225/70R16/C	Raised White Letters	6.0-7.0	1875@50 psi	C	15	9	28.4	700869
35x12.50R17/E	Raised White Letters	8.5-11.0	3195@65 psi	E	15	12.5	34.5	700858
33x12.50R15/C	Raised White Letters	8.5-11.0	2205@35 psi	C	15	12.5	32.5	700854
32x11.50R15/C	Raised White Letters	8.0-10.0	2535@50 psi	C	15	11.4	31.5	700852
LT255/65R17/D	Raised White Letters	7.0-9.0	2600@65 psi	D	15	10.2	30.1	700888
LT225/65R17/D	Raised Black Letters	6.0-8.0	2150@65 psi	D	15	9	28.5	700883
LT285/75R16/E	Raised White Letters	7.5-9.0	3750@80 psi	E	15	11.3	32.8	700879
LT255/70R16/E	Raised White Letters	6.5-8.0	3085@80 psi	E	15	10.2	30.1	700875
LT245/70R16/D	Raised White Letters	6.5-7.0	2535@65 psi	D	15	9.8	29.5	700873
LT235/70R16/C	Raised White Letters	6.0-7.5	1985@50 psi	C	15	9.5	29	700871
LT215/70R16/C	Raised White Letters	5.5-7.0	1765@50 psi	C	15	8.7	27.9	700868
LT215/75R15/C	Raised Black Letters	5.5-7.0	1765@50 psi	C	15	8.5	27.7	700865
35x12.50R18/E	Raised White Letters	8.5-11.0	3415@65 psi	E	15	12.5	34.5	700862
33x12.50R18/E	Raised Black Letters	8.5-11.0	2910@65 psi	E	15	12.5	32.5	700860
34x10.50R17/D	Raised White Letters	7.0-9.0	3085@65 psi	D	15	10.6	33.5	700857
35x12.50R15/C	Raised White Letters	8.5-11.0	2535@35 psi	C	15	12.5	34.5	700855
33x10.50R15/C	Raised White Letters	7.0-9.0	2600@50 psi	C	15	10.6	32.5	700853
31x10.50R15/C	Raised White Letters	7.0-9.0	2270@50 psi	C	15	10.6	30.5	700851
30x9.50R15/C	Raised White Letters	6.5-8.5	1990@50 psi	C	15	9.5	29.5	700850
LT245/70R17/E	Raised White Letters	6.5-8.0	3000@80 psi	E	15	9.8	30.6	700886
LT235/80R17/E	Raised Black Letters	6.0-7.5	3085@80 psi	E	15	9.3	31.8	700884
LT315/75R16/E	Raised White Letters	8.0-11.0	3860@65 psi	E	15	12.3	34.6	700882
LT295/75R16/E	Raised White Letters	7.5-9.5	3970@80 psi	E	15	11.6	33.4	700880
LT275/70R16/D	Raised White Letters	7.0-8.5	3000@65 psi	D	15	11	31.2	700878
LT265/75R16/E	Raised White Letters	7.0-8.0	3415@80 psi	E	15	10.5	31.7	700877
LT265/70R16/E	Raised White Letters	7.0-8.5	3195@80 psi	E	15	10.7	30.6	700876
LT225/75R16/E	Raised White Letters	6.0-7.0	2680@80 psi	E	15	8.8	29.3	700870
LT215/65R16/D	Raised Black Letters	6.0-7.5	1930@65 psi	D	15	8.7	27	700867
LT235/75R15/C	Raised White Letters	6.0-7.0	1985@50 psi	C	15	9.3	28.9	700866
35x12.50R20/E	Raised Black Letters	8.5-11.0	3195@75 psi	E	15	12.5	34.5	700864
33x12.50R20/E	Raised Black Letters	8.5-11.0	2600@65 psi	E	15	12.5	32.5	700863
34x12.50R18/E	Raised Black Letters	8.5-11.0	3195@65 psi	E	15	12.5	33.5	700861
37x12.50R17/D	Raised White Letters	8.5-11.0	3525@50 psi	D	15	12.5	36.5	700859
33x12.50R17/E	Raised Black Letters	8.5-11.0	3085@65 psi	E	15	12.5	32.5	700856

Call for sizes not listed (minimum quantity may be required). All split rims require flaps. These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. Dimensions are based on non-scientific measurements of inflated tires. A small round recessed area is available for you to color if you want the tire to appear as on many original tires.



MOTORCYCLE TIRES

Firestone is the number one tire choice for classic motorcycle restorations and custom builds around the world. We offer the famous Deluxe Champion, as well as Firestone ANS and many other designs, dating all the way back to the early 1900's.



TIRE SIZE	DESCRIPTION	PH	SIDEWALL	RIM DMTR	RIM WIDTHS	PLY RATING	LOAD CAPACITY	LOAD/ SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
325-16	ZIG ZAG	C	5/8"	16	2.15	4 PLY	400@32PSI	48P	3.89	24.00	63284	-	85500
325-16	ZIG ZAG	C	1 1/2"	16	2.15	4 PLY	400@32PSI	48P	3.89	24.00	63285	-	85500
350-16	ZIG ZAG	A	BLACK	16	2.15	4 PLY	440@32PSI	52P	4.05	24.44	-	63290	85500
500-16	ZIG ZAG	A	BLACK	16	3.00	4 PLY	740@32PSI	71P	5.35	26.42	-	72225	85610
500-16	ANS	E	BLACK	16	3.00	4 PLY	740@32PSI	71S	5.60	26.40	-	73225	85610
225-17	REAR	B	BLACK	17	1.20	4 PLY	250@32PSI	-	2.51	21.88	-	68832	86155
250-17	REAR	B	BLACK	17	1.60	4 PLY	290@32PSI	-	2.67	22.44	-	68836	86155
450-17	ANS	E	BLACK	17	2.15	4 PLY	677@32PSI	67S	4.49	26.25	-	73221	86271
350-18	ZIG ZAG	A	BLACK	18	1.85-2	4 PLY	490@32PSI	56S	4.05	26.44	-	71308	86267
400-18	ZIG ZAG	A	BLACK	18	2.15	4 PLY	610@32PSI	64P	4.25	26.57	-	72222	86271
400-18	ANS	E	BLACK	18	2.15	4 PLY	616@32PSI	59S	4.20	27.00	-	73222	86271
450-18	ZIG ZAG	A	BLACK	18	2.15	4 PLY	740@32PSI	70S	4.84	27.40	-	72224	86271
450-18	ANS	E	BLACK	18	2.15	4 PLY	700@32PSI	68S	4.60	27.30	-	73224	86271
325-19	ZIG ZAG	A	BLACK	19	2.15	4 PLY	470@32PSI	54S	3.89	26.34	-	728920	86280
400-19	ANS	E	BLACK	19	2.15	4 PLY	570@30PSI	61S	4.30	28.00	-	73223	86285
400-19	ZIG ZAG	A	BLACK	19	2.15	4 PLY	740@32PSI	61S	4.25	27.59	-	72223	86285
385 X20 CL	CHEVRON	I	BLACK	20	2.15	4 PLY	-	63P	4.37	28.43	-	74760	86285
275-21	RIBBED	D	BLACK	21	1.85	4 PLY	363@32PSI	45S	2.67	26.57	-	74773	86900
300-21	RIBBED	D	BLACK	21	1.85	4 PLY	507@42PSI	57S	2.91	27.17	-	74774	86900
28x2 1/4 CL	RACING	H	ALL WHITE	23	1.63	-	-	-	2.50	28.00	79330	79325	87150
28X3 CL*	NON SKID	F	ALL WHITE	22	1.77	-	-	-	3.00	28.00	791910	-	87090
28X3 CL*	NON SKID	G	BLACK	22	1.77	-	-	-	3.00	28	-	791900	87090



BECK®



PHOENIX™

MOTORCYCLE TIRES

Coker Tire offers the world's largest selection of authentic tires for motorcycles. From our popular Coker Diamonds to our newest line of Phoenix tires, we cover nearly 100 years of motorcycles within our extensive product line.



TIRE SIZE	DESCRIPTION	PH	SIDEWALL	RIM DMTR	RIM WIDTHS	PLY RATING	LOAD CAPACITY	LOAD/ SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
500-16	BECK	P	2"	16	3.00	4 PLY	740@32PSI	71S	5.00	26.25	63400	63525	85610
500-16	COKER CLASSIC	N	3/8 + 3/8 DBL	16	3.00	4 PLY	740@32PSI	71S	5.00	26.25	63520	63393	85610
500-16	COKER CLASSIC	O	1"	16	3.00	4 PLY	740@32PSI	71S	5.00	26.25	63523	-	85610
500-16	COKER CLASSIC	O	2"	16	3.00	4 PLY	740@32PSI	71S	5.00	26.25	63375	-	85610
500-16	INDIAN SCRIPT	M	BLACK	16	3.00	4 PLY	740@32PSI	71P	5.35	26.42	-	73334	85610
500-16	TREADWELL TRACKMASTER	R	BLACK	16	3.00	4 PLY	739@33PSI	72H	4.75	25.75	-	73335	85610
325-18	COKER E70K	L	BLACK	18	1.85-2	4 PR	441@31PSI	52S	3.50	25.16	-	71306	86267
350-18	PHOENIX E70K	J	BLACK	18	1.85-2	4 PLY	494@32PSI	56S	3.65	25.59	-	71310	86267
360-18	PHOENIX E81P	L	BLACK	18	1.85-2	4 PLY	430@41PSI	51H	3.70	25.74	-	71312	86267
385X18 CL	COKER DIAMOND TRD	Q	BLACK	18	1.85-2	4 PLY	-	-	3.4	25.3	-	71335	86267
400-18	BECK	P	1 3/4"	18	2.15	4 PLY	610@32PSI	63P	4.00	26.5	74444	-	86271
400-18	COKER DIAMOND TRD	Q	BLACK	18	2.15	4 PLY	616@32PSI	64P	3.9	25.75	-	71350	86271
400-18	INDIAN SCRIPT	M	BLACK	18	2.15	4 PLY	616@32PSI	64P	4.25	26.57	-	73333	86271
400-18	PHOENIX E70P	J	BLACK	18	2.15	4 PLY	616@32PSI	64S	4.17	26.73	-	71354	86271
410-18	PHOENIX E81P	L	BLACK	18	2.15	4 PLY	536@41PSI	59H	4.00	25.46	-	71357	86271
425/85-18	PHOENIX E81P	K	BLACK	18	2.50	4 PLY	617@41PSI	64H	4.25	26.00	-	71358	86271
450-18	BECK	P	2"	18	2.15	4 PLY	740@32PSI	70P	4.39	27.25	71385	-	86271
450-18	COKER DIAMOND TRD	Q	BLACK	18	2.15	4 PLY	740@32PSI	70P	4.50	27.00	-	71370	86271
350-19	COKER E70K	L	BLACK	19	2.15	4 PR	507@32PSI	57S	3.66	26.57	-	728922	86280
360-19	PHOENIX E81P	K	BLACK	19	2.15	4 PLY	441@41PSI	52H	3.66	25.24	-	72889	86280
400-19	COKER DIAMOND TRD	Q	BLACK	19	2.15	4 PLY	640@32PSI	65P	4.00	28.00	-	72895	86285
410-19	PHOENIX E81P	K	BLACK	19	2.15	4 PLY	567@41PSI	61H	4.00	26.46	-	72902	86285

* Non-Skid may provide poor mileage on asphalt roads. Prices do not include freight. *** Tread similar to L.
Note: These tires are designed for vehicles manufactured prior to 1976. See page 81 for details. Dimensions are based upon non-scientific measurements of inflated tires.
CL = Clincher Rim





BECK®



PHOENIX™

SHOP NOW!
Scan Code With Phone Camera



MOTORCYCLE TIRES

TIRE SIZE	DESCRIPTION	PH	SIDEWALL	RIM DMTR	RIM WIDTHS	PLY RATING	LOAD CAPACITY	LOAD/ SPEED INDEX	SECTION WIDTH	OVERALL DIAMETER	WW ITEM #	BW ITEM #	TUBE ITEM #
26X2 1/2 CL	COKER BUTTON	E/F	BLACK/ WHITE	21	1.630	-	-	-	2.40	26.00	77565	77560	86900
28X3 CL	COKER RIBBED	A	BLACK	22	1.77	-	-	-	2.70	28.00	79225	79200	86900
28X3 CL	G&J	B/C	WHITE/ BLACK	22	1.77	-	-	-	2.70	28.00	79247	79246	86900
28X2 1/2 CL	G&J	B	BLACK	23	1.63	-	-	-	2.40	28.25	79244	79245	87150
26X3 CL	SIMPLEX*	D	BLACK	20	1.75	-	-	-	2.95	26.00	-	74715	86900
27X3.50 CL	SIMPLEX*	K	BLACK	20	1.75	-	-	-	3.10	26.60	-	74735	86900
24X2 1/4 CL	COKER BUTTON	E/F	BLACK/ WHITE	20	1.38	-	-	-	2.25	24.00	74680	74670	86876
26X3 CL	COKER BUTTON	E/F	BLACK/ WHITE	20	1.75	-	-	-	2.95	26.00	74690	74700	86900
28X3 CL	COKER BUTTON	E/F	BLACK/ WHITE	22	1.77	-	-	-	2.70	28.25	79240	79230	86900
28X2 1/2 CL	COKER BUTTON	E/F	BLACK/ WHITE	23	1.63	-	-	-	2.40	28.25	79350	79360	87150
28X2 CL	US RUBBER	G	BLACK	24	1.45	-	-	-	2.70	28.00	-	63282	63281
335X18 CL	COKER CHEVRON	H	BLACK	18	1.85-2	4 PLY	-	-	3.25	24.95	-	71300	86267
385X18 CL	COKER DIAMOND TRD	I	BLACK	18	1.85-2	4 PLY	-	-	3.40	25.30	-	71335	86267
385X20 CL	COKER DIAMOND TRD	I	BLACK	20	2.15	4 PLY	-	-	3.20	27.50	-	74770	86286
350-20	SIMPLEX*	J	BLACK	20	2.15	4 PLY	-	-	3.33	27.40	-	74740	86900
200-17	METZELER	L	3/8"	17	1.20	2 PLY	185@36PSI	-	2.00	21.90	68826	68825	86155
300-20	COKER FRONT RIBBED	M	BLACK	20	1.85	4 PLY	415@36PSI	-	2.75	26.37	-	822822	862799
300-20	COKER REAR	N	BLACK	20	1.85	4 PLY	415@36PSI	-	2.75	26.37	-	822823	862799
300-16**	GOODYEAR RIBBED	O	BLACK	16	1.85	4 PLY	390@32PSI	-	2.90	22.25	-	63225	85500
325-16**	GOODYEAR RIBBED	O	BLACK	16	2.15	4 PLY	400@32PSI	-	3.25	22.75	-	63280	85500
300-16**	GOODYEAR KNOBBY	P	BLACK	16	1.85	4 PLY	390@32PSI	-	2.90	22.25	-	63210	85500
325-16**	GOODYEAR KNOBBY	P	BLACK	16	2.15	4 PLY	400@32PSI	-	3.25	22.75	-	63275	85500
120-16	DEKA	Q	BLACK	16	2.15	4 PLY	836@32PSI	74P	4.49	25.90	-	63360	85610
350-19	DEKA	Q	BLACK	19	2.15	4 PLY	507@32PSI	57P	3.66	26.57	-	728930	86280
26-2.50	SIMPLEX	R	BLACK	21.5	1.63	-	-	-	2.50	26.50	-	74778	86900

*The rims for the 27X3.50 BE Simplex and the 26X3 BE Simplex are actually considered "CC RIMS" which are 10MM larger than regular 20 inch clincher rim and are ONLY used on European Clincher motorcycle rims. DO NOT use these tires for USA motorcycles. **New old stock.



SHOP NOW!
Scan Code With Phone Camera

Scooter & Mini Bike Tires

Our Scooter & Mini Bike Tires include classic wide whitewalls and obscure tires like the Jumbo Jr. and many more!



SIZE	RIM DMTR	PH	DESCRIPTION	SIDEWALL	SECTION WIDTH	OVERALL DMTR	WW ITEM #	BW ITEM #	TUBE ITEM #
10x350-4	4	G	JUMBO JR.	BLACKWALL	2.75	10.18	-	50220	50223
14x6	6	I	COKER TRIALS	BLACKWALL	3.82	14.10	-	71287	50225
600-6	6	F	CUSHMAN	BLACKWALL	6.10	17.00	-	50045	50225
475X775	7.75	H	CUSHMAN NDT	BLACKWALL	4.37	16.75	-	92211	84500
475X775	7.75	B	CUSHMAN 100	BLACKWALL	4.37	16.75	-	50050	84500
475x775	7.75	A	COKER CLASSIC	1 3/4 DOUBLE WW	4.37	16.75	50150	-	84500
400-8	8	C	CUSHMAN	2 1/4 DOUBLE WW	4.00	16.80	50185	50180	84500
375-975	9.75	E	COKER CLASSIC	1 1/2 DOUBLE WW	3.75	17.37	50210	50200	85000
300-10	10	J	COKER MOTOCROSS	BLACKWALL	3.00	16.26	-	71288	50227
300-12	12	I	COKER	BLACKWALL	2.87	18.23	-	71289	51781
400-12	12	D	COKER CLASSIC	1 1/2 DOUBLE WW	3.75	20.00	50624	50625	85050

THE RIGHT LOOK FOR YOUR VINTAGE BIKE!

Our extensive line of authentic tires for collector motorcycles goes all the way back to the early 1900's, with many sizes and styles of clincher tires. Coker Tire is one of the only sources for these

rare tires, which are manufactured in authentic molds. Original brands, such as G&J are favorites for restorers, and our Coker brand tires offer many classic fitments.

MORE INFO

Looking for an odd size or discontinued style? We offer a variety of tires in various brands, such as Simplex, Goodyear, Deka and more. Please note that some tires are NOS (New Old Stock) products, and are not eligible for our Life of the Tread Warranty or Extended Tire Protection. New Old Stock tires are for museum or display use only.

CUSHMAN SUPER EAGLE 100 TIRE & WHEEL ASSEMBLY

Cushman 475 x 775 + new painted steel rim + tube is included per tire & wheel. Shipped complete, mounted & ready to go!

- Blackwall
- Whitewall



CUSHMAN TWO-PIECE RIM

ITEM# 92209





Phoenix Race Tires is born from 50 years of drag tires history, which championships to back up the performance. This brand offers DOT approved front runners and 22 rear slick sizes to cater to the weekend warrior or the professional racer. We even offer competitive tires for No Prep Drag Racing.

FRONT RUNNERS - DOT CERTIFIED

TIRE SIZE	ITEM #	COMPOUND	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD WIDTH	TIRE WEIGHT	CIRC
4.0/22.5-15	PH426	DE	4.0	5.5	22.6	4.1	8.5	71.00
5.0/24.0-15	PH435	DE	4.0	7.0	24	4.9	10	75.50
4.5/24.5-15	PH183	DE	4.0	6.4	25.5	4.5	13.5	80.00
4.5/26.0-15	PH180	DE	4.0	6.8	26.7	4.0	14.0	84.00
4.5/27.0-17	PH427	DE	5.0	6.1	27.1	3.9	13	84.75
4.5/28.0-15	PH428	DE	4.0	8.0	28.3	5.2	15.0	89.00

REAR SLICKS

TIRE SIZE	ITEM #	COMPOUND	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD WIDTH	TIRE WEIGHT	CIRC
7.00/26.0-15	PH726	F9	7.0	9.0	25.8	7.0	20.0	81.75
9.00/28.0-15	PH985	F9	8.0	10.0	27.5	8.9	24.0	86.75
9.00/28.0-17	PH987	F9	8.0	10.0	27.5	8.9	24.0	86.75
9.00/28.5-15	PH377	F9	8.0	12.5	28.6	8.9	25.0	90.00
9.00/30.0-15RAD	PH50R	F9	10.0	12.5	29.5	9.0	22.0	92.00
10.5/28.0-15	PH185	F9	10.0	11.0	27.8	10.0	26.0	87.50
10.5/28.0-17	PH187	F9	10.0	11.0	27.8	10.0	26.0	87.50
10.5/28.0-15S	PH18S	F9	10.0	11.0	27.8	10.0	26.5	87.50
10.5/28.0-15WS	PH18W	F9	11.0	12.0	28.0	10.9	27.5	88.00
10.5/28.5-15	PH380	F9	10.0	13.0	28.5	10.6	26.0	89.50
10.5/29.5-15	PH374	F9	10.0	13.0	30.1	10.7	28.5	94.75
10.5/31.0-15W*	PH101	F9	12.0	14.7	31.5	11.7	29.0	98.75
11.5/28.5-15	PH360	F9	10.0	14.0	28.6	11.9	25.0	89.50
11.5/29.5-15	PH362	F9	10.0	14.0	30.4	11.8	31.0	94.50
11.5/29.5-15W*	PH376	F9	12.0	15.5	30.4	13.5	32.5	95.50
12.2/31.25-15W*	PH337	F9	14.0	16.5	31.8	13.4	33.0	99.00
13.6/32.0-15RAD	PH55R	F9	14.0	16.5	32.2	13.6	30.0	101.25
13.0/31.0-15	PH379	F9	12.0	15.0	30.6	12.4	32.5	95.75
14.0/32.0-15	PH335	F9	14.0	17.7	32.5	14.2	33.0	101.00
14.0/32.0-15W*	PH367	F9	14.0	18.0	32.5	15.6	40.5	102.00
14.5/32.0-15	PH338	F9	14.0	18.2	33.1	14.4	37.0	104.50
14.5/32.0-15RAD	PH56R	F9	14.0	18.0	32.3	14.9	31.0	101.50

Note: CIRC=Circumference, RAD = Radial / *W = Wide. F31=SOFT, F9=MEDIUM, F14=HARD.

DRAG TUBES

TUBE SIZE	ITEM #	FITMENT GUIDE	TUBE WEIGHT
900-14/15	MH900	TO 30" DIAMETER TO 9.5 TREAD 14/15 RIM	5.0
900-14/15	MH1050	TO 31.5" DIAMETER TO 12.5 TREAD 15/16 RIM	6.0
900-14/15	MH1450	TO 33.5" DIAMETER TO 16.5 TREAD 15/16 RIM	7.0



SHOP NOW!
Scan Code
With Phone
Camera





RACEMASTER



SHOP NOW!
Scan Code
With Phone
Camera



M&H Racemaster is the originator of the purpose-built drag racing tire, and we're proud to stock the full product line. This includes bias ply slicks, Cheater Slicks, drag radials and much

FRONT
RUNNER



DRAG
SLICK



VINTAGE
RACE/
NOSTALGIC



CHEATER
SLICK



DRAG RACE FRONT RUNNERS DOT CERTIFIED

TIRE SIZE	COMP RACE SIZE	ITEM ID	RIM WIDTH	SECTION WIDTH	TREAD WIDTH	CIRC
3.5/22-15 RIB	P145/60-15	MSS021	4.0	5.5	4.0	69.5
3.6/24-15 RIB	P165/70-15	MSS022	4.0	6.2	4.0	74.9
5.0/24-15 RIB	P175/70-15	MSS023	4.5	6.6	4.8	75.2
4.5/26-15 RIB	P175/75-15	MSS018	4.5	6.5	4.5	81.2
4.5/27-15 RIB	P185/85-15	MSS014	4.5	7.0	4.5	85.6
4.5/27-16 RIB	P185/80-16	MSS015	4.5	6.8	4.5	85.6
4.5/26-17 RIB	P165/70-17	MSS017	4.5	6.0	4.5	81.7
4.5/28-17 RIB	P165/85-17	MSS024	4.5	6.3	4.5	88.0
4.5/28-18 RIB	P155/85-18	MSS-025	4.5	5.8	4.5	88.0

DRAG RACE SLICKS - REAR

TIRE SIZE	ITEM ID	COMPOUND	RIM WIDTH	SECTION WIDTH	TREAD WIDTH	CIRC
8.0/22.0-13	MHR03	#HB11	8.0	10.0	8.0	70.0
8.0/23.0-13	MHR004	#HB11	8.0	10.0	8.5	72.5
8.5/24.5-13	MHR009	#HB11	8.0	10.5	8.5	76.8
9.5/24.5-13	MHR19	#HB11	8.0	11.1	9.5	77.0
6.0/26.0-15	MHR060	#HB11	6.0	8.5	6.0	81.7
7.5/23-15	MHR021	#HB11	6.0	8.2	7.3	73.0
8.5/23.0-15	MHR023	#HB11	8.0	9.4	8.3	73.0
8.5/24.5-15	MHR025	#HB11	8.0	10.0	8.5	77.0
8.5/26.0-15	MHR062	#HB11	8.0	10.5	8.3	82.0
10.0/26.0-15	MHR064	#HB11	8.0	11.1	10.0	82.0
10.0/27.0-15	MHR068	#HB11	9.0	12.1	10.3	86.5
8.5/26.0-17	MHR172	#HB11	8.0	9.5	8.5	82.0
10.5/28.0-17	MHR173	#HB11	10.0	11.5	10.1	88.0
10.5/28.0-18	MHR174	#HB11	10.0	11.5	10.1	88.0
12.0/26.0-15	MHR066	#HB11	10.0	13.5	12.0	82.0

Note: HB11=Medium

VINTAGE RACE/ NOSTALGIC SLICKS - REAR

TIRE SIZE	ITEM ID	COMPOUND	RIM WIDTH	SECTION WIDTH	TREAD WIDTH	CIRC
4.0/26.6-18 MOTORCYCLE	MVD009	#HB11	3.0	5.0	4.0	83.5
8.00/8.50-14	MVD006	#704	6.5	9.8	7.0	88.0
9.00/15	MVD007	#HB11	7.0	10.3	7.0	92.0
12.00/16	MVD004	#8	10.0	13.6	11.6	100.0

CHEATER SLICK DRAG RACE TIRES DOT CERTIFIED

TIRE SIZE	COMP RACE SIZE	ITEM ID	COMPOUND	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD WIDTH	CIRC
26/10.5-15LT	8.5/26.0-15	MHD01	#HB11	8.0	10.5	26.0	8.5	81.8
26/11.5-15LT	10.0/26.0-15	MHD002	#HB11	10.0	12.3	26.0	10.0	82.0
28/12.5-15LT	10.0/28.0-15	MHD04	#HB11	10.0	12.5	28.0	10.0	88.0
30/14.5-15LT	12.0/30.0-15	MHD12	#HB11	11.0	14.7	30.0	12.0	94.2
26/11.5-16LT	10.0/26.0-16	MHD03	#HB11	10.0	11.8	26.0	10.0	82.0
30/14.0-16LT	11.0/30.0-16	MHD011	#HB11	10.0	14.0	30.0	11.0	94.0



1965 Dodge Coronet
Rear Tires: M&H Racemaster 900-15 Slicks

RADIAL DRAG RACE TIRES DOT CERTIFIED

TIRE SIZE	COMP RACE SIZE	ITEM ID	RIM WIDTH	SECTION WIDTH	DIAMETER	TREAD WIDTH	CIRC
235/60R15	8.5/26.0R15	ROD36	7.0	9.4	26.0	8.6	81.7
245/55R15	9.0/26.0R15	ROD29	8.0	9.9	26.0	9.0	81.7
275/50R15	10.5/26.0R15	ROD30	8.5	11.2	26.0	10.5	81.7
275/60R15	9.5/28.0R15	ROD16	8.0	10.9	28.0	9.5	88.0
315/60R15	12.0/30.0R-15	ROD38	9.5	13.1	29.9	11.6	94.0
325/50R15	11.5/28.0R15	ROD17	10.0	12.4	28.0	11.0	88.0
390/45R15	12.5/29.5R15	ROD07	12.0	14.8	29.5	12.5	92.7
275/55R16	10.0/28.0R16	ROD18	9.0	10.9	28.0	9.5	88.0
315/50R16	11.0/28.5R16	ROD24	10.0	12.2	28.4	11.0	89.0
245/45R17	9.0/26.0R17	ROD35	8.0	9.3	26.0	9.0	81.7
275/40R17	10.5/26.0R17	ROD33	9.0	11.0	26.0	10.5	81.7
275/50R17	9.0/28.0R17	ROD19	9.0	10.5	28.0	9.5	88.0
325/45R17	11.5/28.0R-17	ROD20	11.0	12.6	28.0	11.3	88.0
390/40R17	12.5/29.5R17	ROD09	12.0	14.3	29.5	12.5	92.7
245/40R18	9.0/26.0R18	ROD34	8.5	9.6	26.0	9.0	81.7
275/45R18	10.0/28.0R18	ROD21	10.0	11.1	28.0	9.8	88.0
325/40R18	11.5/28.0R18	ROD22	12.0	12.8	28.0	11.3	88.0
345/35R18	12.5/28.0R18	ROD23	13.0	13.8	28.0	12.3	88.0
305/35R20	12.5/29.0R20	ROD40	11.0	12	28.6	11.0	90
185/75R15	5/26R15	ROD02	5.0	6.7	26.0	5.0	81.7
26/8.50R15	7/26R15	ROD27	7.0	8.8	26.0	7.0	81.7
185/55R17	5/26R17	ROD11	5.0	6.6	26.0	5.0	81.7
26/8.50R-17	7/26R17	ROD25	7.0	8.4	26.0	7.0	81.7
185/50R18	5/26R18	ROD12	5.0	6.5	26.0	5.0	81.7
4.5/28.0R17	RIBBED TREAD	ROD37	4.5	5.9	28.0	4.5	88

MUSCLE CAR RACE TIRES DOT CERTIFIED

TIRE SIZE	PHOTO	COMP RACE SIZE	ITEM ID	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD WIDTH	CIRC
P205/60-13	C	7.5/23.0-13	MSS012	6.0	8.8	22.8	7.2	71.6
P235/60-14	C	7.5/25.0-14	MSS002	6.5	9.8	25.0	7.5	78.4
P215-65-15	B	6.0/26.0-15	MSS016	6.0	8.4	26.0	6.0	81.6
P235/60-15	C	7.5/25.5-15	MSS008	6.5	9.8	25.4	7.5	80.0
G60/15	B	8.0/26.0-15	MSS003	7.0	10.3	26.2	7.8	82.3
J60/15	B	8.0/27.0-15	MSS004	7.0	10.7	27.2	8.0	85.4
P275/60-15	A	10.0/28.0-15	MSS001	9.0	11.7	28.2	10.0	88.5
N50/15	A	11.0/28.0-15	MSS006	10.0	12.8	28.2	11.0	88.5

DRAG TUBES

TUBE SIZE	ITEM #	FITMENT GUIDE	TUBE WEIGHT
900-14/15	MH900	TO 30" DIAMETER TO 9.5 TREAD 14/15 RIM	5.0
10.50-15/16	MH1050	TO 31.5" DIAMETER TO 12.5 TREAD 15/16 RIM	6.0
14.50-15/16	MH1450	TO 33.5" DIAMETER TO 16.5 TREAD 15/16 RIM	7.0

DRAG
RADIAL



MUSCLE
CAR



B



C





Chevy Rallye

- 1967-82 Chevrolets. Original equipment for many Chevrolets including Corvette, Camaro, & Chevelle • Finish: Powder coated Silver or Chrome • O.E. GM hubcaps, trim rings applicable
- Single bolt pattern 5 x 4-1/2 & 5 x 4-3/4
- Accessories sold separately

Chrome



ITEM ID	SIZE	BOLT PATTERN	BACKSPACE
CR145	14x5	5x4.75	3.5
CR146	14x6	5x4.75	3.75
CR147	14x7	5x4.75	4
CR148	14x8	5x4.75	4
CR154	15x4	5x4.75	2.5
CR155	15x5	5x4.75	3
CVTC156	15x6	5x4.75	3.5
CR156	15x6	5x4.75	4
CR157	15x7	5x4.75	4.25
CVTC158	15x8	5x4.75	4
CR158	15x8	5x4.75	4.5
CR1510	15x10	5x4.75	5
CRCR166SM400	16x6	5x4.5, 5x4.75	4
CRCR167SM400	16x7	5x4.5, 5x4.75	4
CRCR168SM400	16x8	5x4.5, 5x4.75	4
CRCR168SM412	16x8	5x4.5, 5x4.75	4.5
CRCR1610SM500	16x10	5x4.5, 5x4.75	5
CRCR177SM412	17x7	5x4.5, 5x4.75	4.5
CRCR178SM412	17x8	5x4.5, 5x4.75	4.5
CRCR179SM500	17x9	5x4.5, 5x4.75	5
CRCR187SM414	18x7	5x4.5, 5x4.75	4.25
CRCR188SM412	18x8	5x4.5, 5x4.75	4.5

Silver

ITEM ID	SIZE	BOLT PATTERN	BACKSPACE
CRP145	14x5	5x4.75	3.5
CRP146	14x6	5x4.75	4
CRP147	14x7	5x4.75	4.25
CRP148	14x8	5x4.75	4
CRP154	15x4	5x4.75	2.5
CRP155	15x5	5x4.75	3
CVT156	15x6	5x4.75	3.5
CRP156	15x6	5x4.75	4
CRPS157SG334	15x7	5x4.75	3.75
CRP157	15x7	5x4.75	4.25
CVT158	15x8	5x4.75	4
CRP158	15x8	5x4.75	4.5
CRP1510	15x10	5x4.75	5
CRPS166SM400	16x6	5x4.5, 5x4.75	4
CRPS167SM400	16x7	5x4.5, 5x4.75	4
CRPS168SM412	16x8	5x4.5, 5x4.75	4.5
CRPS168SM500	16x8	5x4.5, 5x4.75	5
CRPS1610SM500	16x10	5x4.5, 5x4.75	5
CRPS177SM412	17x7	5x4.5, 5x4.75	4.5
CRPS178SM412	17x8	5x4.5, 5x4.75	4.5
CRPS179SM500	17x9	5x4.5, 5x4.75	5
CRPS187SM414	18x7	5x4.5, 5x4.75	4.25
CRPS188SM412	18x8	5x4.5, 5x4.75	4.5



SHOP NOW!
Scan Code With
Phone Camera

CHEVY RALLYE & PICKUP RALLYE ACCESSORIES

Standard 7-inch Diameter Caps



#1008
Baby Moon



#1026
Bullet Cap short
31/2"



#1039
'49 Chevy Cap



#1013
Derby w/o Script
plastic



#1012
Derby Cap



#1016
Short Derby Cap



#2030
47-53 Chevy



#2032
41-47 Chevy Cap



#1012A
Derby Cap w/
"Chevrolet Motor
Division" script
& Bowtie



#1020C
Knockoff
Cap - Straight



#1000C
Chevy Police Cap
w/bowtie

#1002C
Plain



#1015
Disc Brake Cap
w/"Chevrolet
Motor
Division" & "Disc
Brake" script

#1014C
w/o disk brake
script



Knockoff Cap Plain
#1018CL
Swept Left,
Driver Side

#1018CR
Swept Right,
Passenger Side
(Pictured)



Trim Rings
#3000-15
15x4/5
#3001-A
15x7
#3001-14
14x7
#3002
15x8/10



Knockoff Cap
Fluted
#1019L
Swept Left,
Driver Side

#1019R
Swept Right,
Passenger Side
(pictured)



#5006
Rubber Valve Stem
w/Chrome Sleeve

Pickup Rallye

- Finish: Powder coated Silver or Chrome
- 5 x 5, 5 x 5.5, 6 x 5.5 bolt pattern
- Accessories sold separately



Silver



ITEM ID	SIZE	BOLT PATTERN	BACKSPACE
PUCR1566L334	15x6	6x5.5	3.75
PUCR156LG334	15x6	5x5	3.75
PUCR1576L400	15x7	6x5.5	4
PUCR157LG400	15x7	5x5	4
PUCR1586L400	15x8	6x5.5	4
PUCR158LG400	15x8	5x5	4
PUCR158LG412	15x8	5x5	4.5
PUCR158LG500	15x8	5x5	5
PUCR15106L412	15x10	6x5.5	4.5
PUCR15106L500	15x10	6x5.5	5
PUCR1510LG412	15x10	5x5	4.5
PUCR1510LG414	15x10	5x5	4.25
PUCR1510LG500	15x10	5x5	5
PUCR15126L412	15x12	6x5.5	4.5
PUCR15146L412	15x14	6x5.5	4.5
PUCR1666L400	16x6	6x5.5	4
PUCR166LG400	16x6	5x5	4
PUCR1676L400	16x7	6x5.5	4
PUCR167LG400	16x7	5x5	4
PUCR1686L400	16x8	6x5.5	4
PUCR168LG400	16x8	5x5	4
PUCR168LG412	16x8	5x5	4.5
PUCR16106L500	16x10	6x5.5	5
PUCR1610LG500	16x10	5x5	5
PUCR1776L412	17x7	6x5.5	4.5
PUCR177LG412	17x7	5x5	4.5
PUCR1786L412	17x8	6x5.5	4.5
PUCR178LG412	17x8	5x5	4.5
PUCR179LG500	17x9	5x5	5
PUCR1876L414	18x7	6x5.5	4.25
PUCR187LG414	18x7	5x5	4.25
PUCR1886L412	18x8	6x5.5	4.5
PUCR1886L512	18x8	6x5.5	5.5
PUCR188LG412	18x8	5x5	4.5

Chrome

ITEM ID	SIZE	BOLT PATTERN	BACKSPACE
PUPS1566L334	15x6	6x5.5	3.75
PUPS156LG334	15x6	5x5	3.75
PUPS1576L400	15x7	6x5.5	4
PUPS157LG400	15x7	5x5	4
PUPS1586L400	15x8	6x5.5	4
PUPS158LG400	15x8	5x5	4
PUPS158LG500	15x8	5x5	5
PUPS15106L412	15x10	6x5.5	4.5
PUPS15106L500	15x10	6x5.5	5
PUPS1510LG412	15x10	5x5	4.5
PUPS1510LG500	15x10	5x5	5
PUPS15126L412	15x12	6x5.5	4.5
PUPS1512LG412	15x12	5x5	4.5
PUPS15146L412	15x14	6x5.5	4.5
PUPS1514LG412	15x14	5x5	4.5
PUPS1666L400	16x6	6x5.5	5
PUPS166LG400	16x6	5x5	4
PUPS1676L400	16x7	6x5.5	4
PUPS167LG400	16x7	5x5	4
PUPS1686L400	16x8	6x5.5	4
PUPS168LG400	16x8	5x5	4
PUPS168LG412	16x8	5x5	4.5
PUPS16106L500	16x10	6x5.5	5
PUPS1610LG500	16x10	5x5	5
PUPS1776L412	17x7	6x5.5	4.5
PUPS177LG412	17x7	5x5	4.5
PUPS1786L412	17x8	6x5.5	4.5
PUPS178LG412	17x8	5x5	4.5
PUPS1796L500	17x9	6x5.5	5
PUPS179LG500	17x9	5x5	5
PUPS1876L414	18x7	6x5.5	4.25
PUPS187LG414	18x7	5x5	4.25
PUPS1886L412	18x8	6x5.5	4.5
PUPS1886L512	18x8	6x5.5	5.5
PUPS188LG412	18x8	5	4.25

O.E. Style Pickup Rallye

- Available Bolt Patterns: 5 x 5 & 6 x 5-1/2
- Powder Coated Silver
- Accepts OE Style Bolt-On Cap



ITEM ID	SIZE	BOLT PATTERN	BACKSPACE
OPPS158LG400	15x8	5x5	4
OPPS1586L400	15x8	6x5.5	4
OPPS1510LG500	15x10	5x5	5
OPPS1510LG412	15x10	5x5	4 1/2
OPPS15106L414	15x10	6x5.5	4 1/4

ACCESSORIES



#5006
Rubber Valve Stem
w/Chrome Sleeve



#C1302B
7/16" Open-end
Lug Nut



#5008
Lugnut, 1/2"
"Right Hand"
1.41" tall



#3002
Trim Rings
15x8/10

CHEVELLE SS



- Powder Coated Wheel with Hand Painted Accents
- 5 x 4-3/4 Bolt Pattern
- Original option for Chevelle, Nova, El Camino, Monte Carlo & Camaro

1969-70 CHEVROLET

ITEMID	SIZE	BACKSPACE
CSS147	14x7	4.375
CSS148	14x8	4.5
CSS156	15x6	4
CSS157	15x7	4.375
CSS158	15x8	4.5
CSS1510	15x10	5

ACCESSORIES



O.E. STYLE CORVETTE




- Powder Coated Satin Black
- 5 x 4-3/4 Bolt Pattern
- * Dimpled outer rim accepts 50's & 60's style Chevy full cover caps!
- Center cap sold separately
- Will not work with disc brakes

1953-62 CORVETTE

ITEMID	SIZE	BACKSPACE
OEVT155SG312	15x5	3.5

ACCESSORIES

Standard Outside-Knob Caps 10-1/8" Back Diameter



BUICK RALLYE



- Chrome with painted lug wells
- 5 x 4-3/4 Bolt Pattern
- Accessories sold separately
- Does not fit 5 x 5 Riviera or Wildcat

1969-79 BUICK

ITEMID	SIZE	BACKSPACE
BR146	14x6	3.5
BR147	14x7	4.0
BR148	14x8	4.5
BR156	15x6	3.5
BR157	15x7	4.0
BR158	15x8	4.5
BR1510	15x10	5.0

OLDSMOBILE SSI RALLYE



- Chrome with painted lug wells
- Excellent full-chrome alternative to the Chevelle SS wheel
- 5 x 4-3/4 Bolt Pattern

1966-74 OLDSMOBILE

ITEMID	SIZE	BACKSPACE
SSI146	14x6	4.000
SSI147	14x7	4.375
SSI148	14x8	4.500
SSI156	15x6	4.000
SSI157	15x7	4.375
SSI158	15x8	4.500
SSI1510	15x10	5.000

ACCESSORIES



ACCESSORIES



1956 Chevrolet Bel Air Convertible
Wheels: O.E. Style Tri Five 15x5

O.E. STYLE TRI FIVE




- Powder coated satin black
- 5 x 4-3/4 Bolt Pattern
- Clears standard disc brake systems
- Dimpled outer accepts 50's & 60's Chevy stock full cover caps

1955-57 CHEVROLET

ITEMID	SIZE	BACKSPACE
OETF145SG234	14x5	2.750
OETF146SG312	14x6	3.500
OETF147SG334	14x7	3.750
OETF155SG234	15x5	2.750
OETF156SG358	15x6	3.625
OETF157SG334	15x7	3.750

ACCESSORIES

Standard Outside-Knob Caps 10-1/8" Back Diameter



PONTIAC RALLYE I




- Finish: Powder Coated Silver or Chrome
- 5 x 4-3/4 Bolt Pattern

1965-70 PONTIAC

SILVER			CHROME		
ITEMID	SIZE	BS	ITEMID	SIZE	BS
PR1146	14x6	4.00	PRIC146	14x6	4.00
PR1147	14x7	4.25	PRIC147	14x7	4.25
PR1156	15x6	4.25	PRIC156	15x6	4.25
PR1157	15x7	4.25	PRIC157	15x7	4.25
PR1158	15x8	5.00	PRIC158	15x8	5.00
PR11510	15x10	5.00	PRIC1510	15x10	5.00

ACCESSORIES

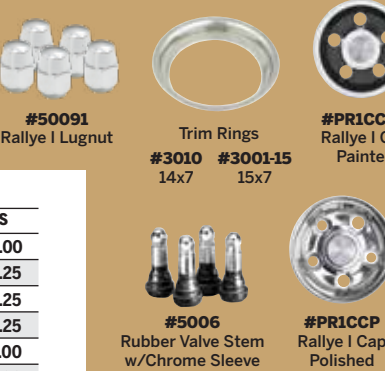

PONTIAC RALLYE II



- Finish: Chrome w/ painted accents or powder coated w/ painted accents
- 5 x 4-3/4 Bolt Pattern

1967-75 PONTIAC

ITEM ID	SIZE	FINISH	BACKSPACE
PR157	15x7	Silver	4.00
PR158	15x8	Silver	4.50
PR1510	15x10	Silver	5.00
PRC157	15x7	Chrome	4.00
PRC158	15x8	Chrome	4.50
PRC1510	15x10	Chrome	5.00

ACCESSORIES



MOPAR RALLYE

- Finish: All chrome or powder coated silver
- Available Bolt Patterns: Large 5 x 4-1/2 & Small 5 x 4



ACCESSORIES



Trim Rings
#3010
14x7



Mopar Lug Nuts
Left-Hand
#5014L - 1/2"



#5006
Rubber Valve Stem
w/Chrome Sleeve




Dark Gray
Rallye Cap
#MRYYCCD
5x4.5




Light Gray
Rallye Cap
#MRYYCCL
5x4.5



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



Right-Hand
#5015L - 7/16"



#3003-B
15x8/10
Brushed



#3003-P
15x8/10
Polished


1969-74 MOPAR

SILVER

ITEM ID	SIZE	BP	BS
MRY146	14x6	5x4.5	4.000
MRY147	14x7	5x4.5	4.250
MRY148	14x8	5x4.5	4.500
MRY156	15x6	5x4.5	4.000
MRY157	15x7	5x4.5	4.250
MRY158	15x8	5x4.5	4.500
MRY1510	15x10	5x4.5	5.000
MRYS146	14x6	5x4	4.000
MRYS147	14x7	5x4	4.250
MRYS148	14x8	5x4	4.630
MRYS156	15x6	5x4	4.000
MRYS157	15x7	5x4	4.250
MRYS158	15x8	5x4	4.625

CHROME

ITEM ID	SIZE	BP	BS
MRYC146	14x6	5x4.5	4.000
MRYC147	14x7	5x4.5	4.250
MRYC148	14x8	5x4.5	4.500
MRYC156	15x6	5x4.5	4.000
MRYC157	15x7	5x4.5	4.250
MRYC158	15x8	5x4.5	4.500
MRYC1510	15x10	5x4.5	5.000
MRYSC146	14x6	5x4	4.000
MRYSC147	14x7	5x4	4.250
MRYSC148	14x8	5x4	4.625
MRYSC156	15x6	5x4	4.000
MRYSC157	15x7	5x4	4.250
MRYSC158	15x8	5x4	4.630

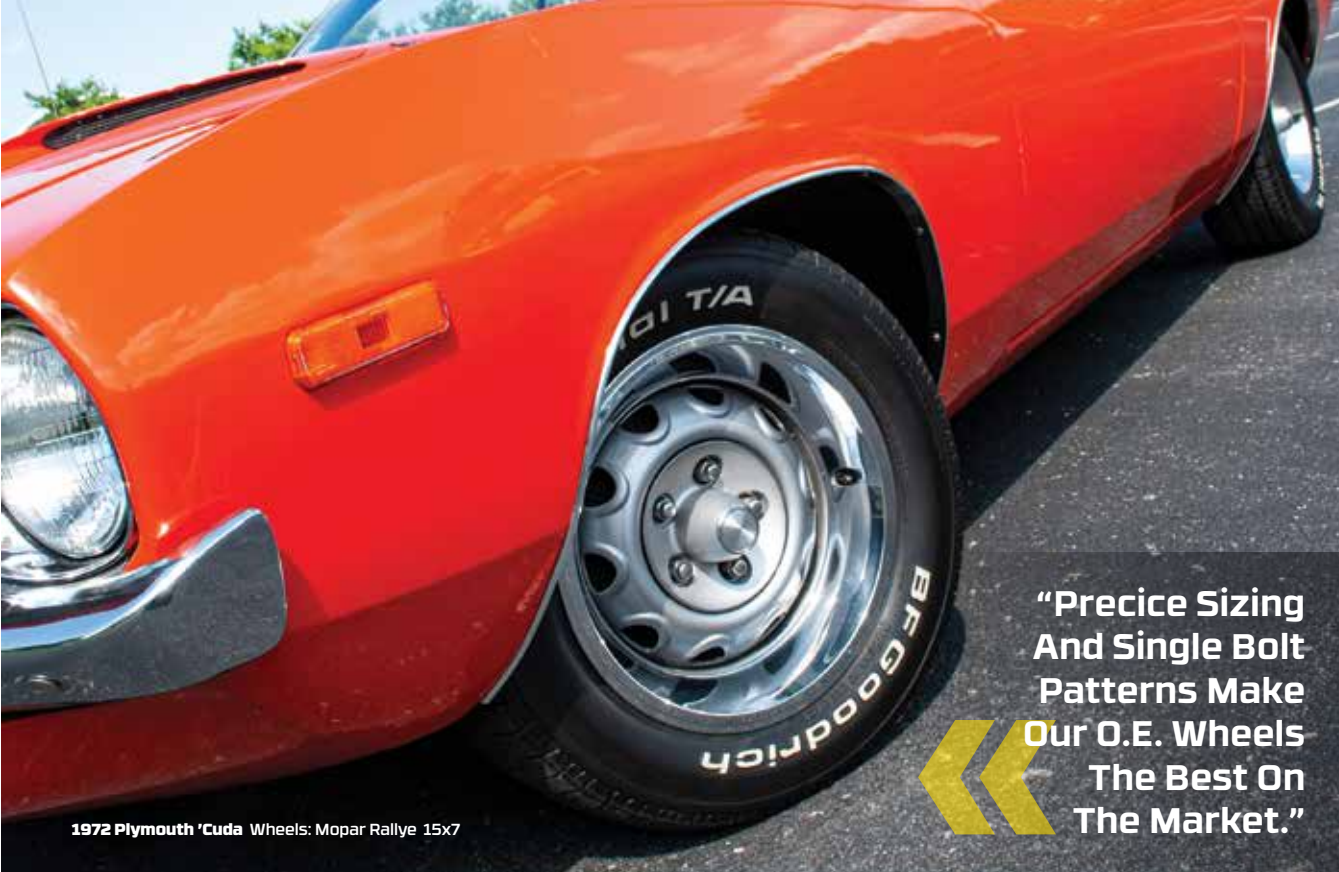

1972 Plymouth 'Cuda' Wheels: Mopar Rallye 15x7

“Precise Sizing
And Single Bolt
Patterns Make
Our O.E. Wheels
The Best On
The Market.”

MOPAR STANDARD



- Powder Coated Satin Black
- O. E. lugnuts applicable
- Available Bolt Patterns: Large 5 x 4-1/2 & Small 5 x 4



ITEM ID	SIZE	BP	BS
MPRST154P	15x4	5x4.5	2.50
MPRST156P	15x6	5x4.5	3.75
MPRST157P	15x7	5x4.5	4.50
MPRST158P	15x8	5x4.5	4.50
MPRST1510P	15x10	5x4.5	5.50
MPRST154P	15x4	5x4	2.50
MPRST156P	15x6	5x4	3.75
MPRST157P	15x7	5x4	4.50
MPRST158P	15x8	5x4	4.50
MPRST1510P	15x10	5x4	5.50

ACCESSORIES




Trim Rings
#3000-14
15x4



#1011A
O.E. Baby
Moon Cap



Mopar Lug Nuts
Left-Hand
#5014L - 1/2"



Right-Hand
#5015L - 7/16"



#5006
Rubber Valve Stem
w/Chrome Sleeve



#2050
O.E. Mopar
Cap

CHRYSLER ROAD WHEEL



- Same Center As Magnum 500, but offered with Black Powder Coat Outer Rim
- 5 x 4-1/2 Bolt Pattern
- Use Trim Ring



ITEM ID	SIZE	BACKSPACE
MR146	14x6	4.00
MR147	14x7	4.25
MR157	15x7	4.25
MR158	15x8	4.50

ACCESSORIES




Mopar Lug Nuts
Left-Hand
#5014L - 1/2"



Trim Rings
#3010
14x6/7



#MRMCCR
Bulls Eye Cap



Right-Hand
#5015L - 7/16"



#3001-15
15x7/8

CHRYSLER POLICE



- 5 x 4-1/2 Bolt Pattern
- Powder coated black



ITEM ID	SIZE	BACKSPACE
POPB154SF212	15x4	2.50
POPB156SF334	15x6	3.75
POPB157SF400	15x7	4.00
POPB158SF400	15x8	4.00
POPB158SF412	15x8	4.50
POPB1510SF512	15x10	4.50

ACCESSORIES



Trim Rings
#3000-14
15x4



#1011A
O.E. Baby
Moon Cap



Mopar Lug Nuts
Left-Hand
#5014L - 1/2"



Right-Hand
#5015L - 7/16"



#5006
Rubber Valve Stem
w/Chrome Sleeve



#2050
O.E. Mopar
Cap

MAGNUM 500



- Chrome with painted lug wells
- 5 x 4-1/2 Bolt Pattern

1968-73 FORD,
CHRYSLER,
PLYMOUTH, DODGE
AND AMC



ITEM ID	SIZE	BACKSPACE
M50146	14x6	3.75
M50147	14x7	4.25
M50148	14x8	4.50
M50156	15x6	4.00
M50157	15x7	4.25
M50158	15x8	4.50
M501510	15x10	5.50

ACCESSORIES




Mopar Lug Nuts
Left-Hand
#5014L - 1/2"



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#MRMCCR
Bulls Eye Cap



Right-Hand
#5015L - 7/16"



#M50MCCR
Pony Cap



#5008
Magnum 500 Style
Lugnut, 1/2"
"Right Hand"
1.41" tall



#M50CCSP
Spinner Cap



#M5TCCT
Torino Cap



1970 FORD MUSTANG Wheels:Magnum 500 15x7 Backspacing: 4.25w

1968-69
FORD STYLED
WHEEL

- All chrome or chrome center w/ black outer rim
- Available Bolt Patterns:
5 x 4-1/2 & 4 x 4-1/4

1968-69
FORD MUSTANG,
FAIRLANE & TORINO



ITEM ID	SIZE	FINISH	BS
689SS146	14x6	Black Outer Rim	4.00
689SS1464L	14x6*	Chrome Outer Rim	4.00
689SS146C	14x6	Chrome Outer Rim	4.00
689SS147C	14x7	Chrome Outer Rim	4.25
689SS148C	14x8	Chrome Outer Rim	4.50
689SS156C	15x6	Chrome Outer Rim	4.00
689SS157C	15x7	Chrome Outer Rim	4.25
689SS158C	15x8	Chrome Outer Rim	4.50
689SS1510	15x10	Chrome Outer Rim	5.00

*4x4 1/2 bolt pattern

ACCESSORIES



689SSCCGT
'68-'69 Styled Steel
Cap w/ GT Emblem



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



689SSCCP
'68-'69 Styled
Steel Cap Plain



#C1304B
1/2" Styled Steel
Lug Nuts



#5006
Rubber Valve Stem
w/Chrome Sleeve

1967-68 MERCURY COUGAR

- Chrome with hand painted light argent lug wells.
- Also available with black outer rim
- 5 x 4 1/2 Bolt Pattern



ITEM ID	SIZE	FINISH	BS
678B146	14x6	Black Outer Rim	4.00
678C145	14x5	Chrome Outer Rim	3.75
678C146	14x6	Chrome Outer Rim	4.00
678C147	14x7	Chrome Outer Rim	4.25
678C156	15x6	Chrome Outer Rim	4.00
678C157	15x7	Chrome Outer Rim	4.50
678C158	15x8	Chrome Outer Rim	4.50

ACCESSORIES



#678CCC
Mercury Man Cap



#529C.
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#5004
Chrome Valve
Stems

1969-70 MERCURY COUGAR

- Argent Center with Chrome Outer Rim
- Also available with black outer rim
- 5 x 4-1/2 Bolt Pattern



ITEM ID	SIZE	FINISH	BS
697B146	14x6	Black Outer Rim	4.00
697C146	14x6	Chrome Outer Rim	4.00
697C147	14x7	Chrome Outer Rim	4.25
697C157	15x7	Chrome Outer Rim	4.25
697C158	15x8	Chrome Outer Rim	4.50

ACCESSORIES



#KC2550B
Chrome Window Bezel



#5006
Rubber Valve Stem
w/Chrome Sleeve



#3007
14" Styled Steel
Trim Ring



#5004
Chrome Valve
Stems



697CCC
Silver Cat
Cap



1965-67 FORD STYLED WHEEL

- 1965 Mustang (no trim ring) Full Chrome
- 1966 Mustang (uses trim ring) Black Outer Rim
- 1967 Mustang (uses trim ring) Black Outer Rim
- 5 x 4-1/2 Bolt Pattern



ITEM ID	SIZE	FINISH	BS
64SS145	14x5	1964 1/2 Light Argent	3.75
65SS145	14x5	1965 Chrome	3.75
66SS145	14x5	1966 Black Outer (uses trim ring)	3.75
67SS1455	14x5 1/2	1967 Black Outer (uses trim ring)	4.00
65SS146	14x6	Chrome Outer	4.00
65SS147	14x7	Chrome Outer	4.25
65SS156	15x6	Chrome Outer	4.00
65SS157	15x7	Chrome Outer	4.25
65SS158	15x8	Chrome Outer	4.50

ACCESSORIES



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#5008
Magnum 500 Style
Lugnut, 1/2" "Right Hand" 1.41" tall



#M50MCCR
Pony Cap

ACCESSORIES



#2017
'65-'66 Mustang
Pony Black Cap



#65SSCCM
'65-'67 Mustang
Cap Red



#5006
Rubber Valve Stem
w/Chrome Sleeve



#65SSCCF
'65-'67 Fairlane Cap



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#3007
14" Styled Steel
Trim Ring



#67SSCCRM
'67 Mustang Cap
Blue



#5008
1/2" Styled Steel
Lug Nuts

Got Questions About Fitment?

Call us or scan this QR code with your phone for a comprehensive article about how to measure for custom wheel and tire fitment.



HOT ROD STEEL



CHROME OUTER/BARE CENTER

ITEM ID	SIZE	BOLT PATTERN	BACK-SPACE
HRCB155LM234	15x5	5x5, 5x5.5	2.750
HRCB155SM234	15x5	5x4.5, 5x4.75	2.750
HRCB156LM334	15x6	5x5, 5x5.5	3.750
HRCB156SM334	15x6	5x4.5, 5x4.75	3.750
HRCB157LM334	15x7	5x5, 5x5.5	3.750
HRCB157LM400	15x7	5x5, 5x5.5	4.000
HRCB157LM412	15x7	5x5, 5x5.5	4.500
HRCB157SM334	15x7	5x4.5, 5x4.75	3.750
HRCB157SM400	15x7	5x4.5, 5x4.75	4.000
HRCB157SM412	15x7	5x4.5, 5x4.75	4.500
HRCB158LM334	15x8	5x5, 5x5.5	3.750
HRCB158LM400	15x8	5x5, 5x5.5	4.000
HRCB158LM412	15x8	5x5, 5x5.5	4.500
HRCB158SM334	15x8	5x4.5, 5x4.75	3.750
HRCB158SM400	15x8	5x4.5, 5x4.75	4.000
HRCB158SM412	15x8	5x4.5, 5x4.75	4.500
HRCB1510LM500	15x10	5x5, 5x5.5	5.000
HRCB1510SM500	15x10	5x4.5, 5x4.75	5.000
HRCB1512LM412	15x12	5x5, 5x5.5	4.500
HRCB1512SM412	15x12	5x4.5, 5x4.75	4.500
HRCB1514LM412	15x14	5x5, 5x5.5	4.500
HRCB1514SM412	15x14	5x4.5, 5x4.75	4.500
HRCB16412LM234	16x4.5	5x5, 5x5.5	2.750
HRCB16412SM234	16x4.5	5x4.5, 5x4.75	2.750
HRCB166LM334	16x6	5x5, 5x5.5	3.750
HRCB166SM334	16x6	5x4.5, 5x4.75	3.750
HRCB167LM400	16x7	5x5, 5x5.5	4.000
HRCB167SM400	16x7	5x4.5, 5x4.75	4.000
HRCB168LM400	16x8	5x5, 5x5.5	4.000
HRCB168SM400	16x8	5x4.5, 5x4.75	4.000
HRCB1610LM500	16x10	5x5, 5x5.5	5.000
HRCB1610SM500	16x10	5x4.5, 5x4.75	5.000
HRCB177LF458	17x7	5x5.5	4.625
HRCB177SM458	17x7	5x4.5, 5x4.75	4.625
HRCB178LF412	17x8	5x5.5	4.500
HRCB178SM412	17x8	5x4.5, 5x4.75	4.500
HRCB179LF514	17x9	5x5.5	5.250
HRCB179SM514	17x9	5x4.5, 5x4.75	5.250

CHROME

ITEM ID	SIZE	BOLT PATTERN	BACK-SPACE
HRCR155LM234	15x5	5x5, 5x5 1/2	2.750
HRCR155SM234	15x5	5x4 1/2, 5x4 3/4	2.750
HRCR156LM334	15x6	5x5, 5x5 1/2	3.750
HRCR156SM334	15x6	5x4 1/2, 5x4 3/4	3.750
HRCR157LM334	15x7	5x5, 5x5 1/2	3.750
HRCR157LM400	15x7	5x5, 5x5 1/2	4.000
HRCR157LM412	15x7	5x5, 5x5 1/2	4.500
HRCR157SM334	15x7	5x4 1/2, 5x4 3/4	3.750
HRCR157SM400	15x7	5x4 1/2, 5x4 3/4	4.000
HRCR157SM412	15x7	5x4 1/2, 5x4 3/4	4.500
HRCR158LM334	15x8	5x5, 5x5 1/2	3.750
HRCR158LM400	15x8	5x5, 5x5 1/2	4.000
HRCR158LM412	15x8	5x5, 5x5 1/2	4.500
HRCR158SM334	15x8	5x4 1/2, 5x4 3/4	3.750
HRCR158SM400	15x8	5x4 1/2, 5x4 3/4	4.000
HRCR158SM412	15x8	5x4 1/2, 5x4 3/4	4.500
HRCR1510LM500	15x10	5x5, 5x5 1/2	5.000
HRCR1510SM500	15x10	5x4 1/2, 5x4 3/4	5.000
HRCR1512LM412	15x12	5x5, 5x5 1/2	4.500
HRCR1512SM412	15x12	5x4 1/2, 5x4 3/4	4.500
HRCR1514LM412	15x14	5x5, 5x5 1/2	4.500
HRCR1514SM412	15x14	5x4 1/2, 5x4 3/4	4.500
HRCR16412LM234	16x4.5	5x5, 5x5 1/2	2.750
HRCR166LM334	16x6	5x5, 5x5 1/2	3.750
HRCR166SM334	16x6	5x4 1/2, 5x4 3/4	3.750
HRCR167LM400	16x7	5x5, 5x5 1/2	4.000
HRCR167SM400	16x7	5x4 1/2, 5x4 3/4	4.000
HRCR168LM400	16x8	5x5, 5x5 1/2	4.000
HRCR168SM400	16x8	5x4 1/2, 5x4 3/4	4.000
HRCR1610LM500	16x10	5x5, 5x5 1/2	5.000
HRCR1610SM500	16x10	5x4 1/2, 5x4 3/4	5.000
HRCR177LF458	17x7	5x5 1/2	4.625
HRCR177SM458	17x7	5x4 1/2, 5x4 3/4	4.625
HRCR178LF412	17x8	5x5 1/2	4.500
HRCR178SM412	17x8	5x4 1/2, 5x4 3/4	4.500
HRCR179LF514	17x9	5x5 1/2	5.250
HRCR179SM514	17x9	5x4 1/2, 5x4 3/4	5.250



- HR Steel Bolt Patterns: 5 x 4-1/2 & 5 x 4-3/4 multi, 5 x 5 & 5 x 5-1/2 multi, 5 x 5-1/2 single (17 x 7/8/9)
- Custom Powder Coating Available - Colors Pg.67

PRIMERED

ITEM ID	SIZE	BOLT PATTERN	BACK-SPACE
HRPR155LM234	15x5	5x5, 5x5.5	2.750
HRPR155SM234	15x5	5x4.5, 5x4.75	2.750
HRPR156LM334	15x6	5x5, 5x5.5	3.750
HRPR156SM334	15x6	5x4.5, 5x4.75	3.750
HRPR157LM334	15x7	5x5, 5x5.5	3.750
HRPR157LM400	15x7	5x5, 5x5.5	4.000
HRPR157LM412	15x7	5x5, 5x5.5	4.500
HRPR157SM334	15x7	5x4.5, 5x4.75	3.750
HRPR157SM400	15x7	5x4.5, 5x4.75	4.000
HRPR157SM412	15x7	5x4.5, 5x4.75	4.500
HRPR158LM334	15x8	5x5, 5x5.5	3.750
HRPR158LM400	15x8	5x5, 5x5.5	4.000
HRPR158LM412	15x8	5x5, 5x5.5	4.500
HRPR158SM334	15x8	5x4.5, 5x4.75	3.750
HRPR158SM400	15x8	5x4.5, 5x4.75	4.000
HRPR158SM412	15x8	5x4.5, 5x4.75	4.500
HRPR1510LM500	15x10	5x5, 5x5.5	5.000
HRPR1510SM500	15x10	5x4.5, 5x4.75	5.000
HRPR1512LM412	15x12	5x5, 5x5.5	4.500
HRPR1512SM412	15x12	5x4.5, 5x4.75	4.500
HRPR1514LM412	15x14	5x5, 5x5.5	4.500
HRPR1514SM412	15x14	5x4.5, 5x4.75	4.500
HRPR16412LM234	16x4.5	5x5, 5x5.5	2.750
HRPR16412SM234	16x4.5	5x4.5, 5x4.75	2.750
HRPR166LM334	16x6	5x5, 5x5.5	3.750
HRPR166SM334	16x6	5x4.5, 5x4.75	3.750
HRPR167LM400	16x7	5x5, 5x5.5	4.000
HRPR167SM400	16x7	5x4.5, 5x4.75	4.000
HRPR168LM400	16x8	5x5, 5x5.5	4.000
HRPR168SM400	16x8	5x4.5, 5x4.75	4.000
HRPR1610LM500	16x10	5x5, 5x5.5	5.000
HRPR1610SM500	16x10	5x4.5, 5x4.75	5.000
HRPR17412LM238	17x4.5	5x5, 5x5.5	2.375
HRPR17412SM238	17x4.5	5x4.5, 5x4.75	2.375
HRPR177LF458	17x7	5x5.5	4.625
HRPR177SM458	17x7	5x4.5, 5x4.75	4.625
HRPR178LM412	17x8	5x5.5	4.500
HRPR178SM412	17x8	5x4.5, 5x4.75	4.500
HRPR179LF514	17x9	5x5.5	5.250
HRPR179SM514	17x9	5x4.5, 5x4.75	5.250
HRPR18412LM238	18x4.5	5x5, 5x5.5	2.375
HRPR18412SM238	18x4.5	5x4.5, 5x4.75	2.375
HRPR19412LM238	19x4.5	5x5, 5x5.5	2.375
HRPR19412SM238	19x4.5	5x4.5, 5x4.75	2.375
HRPR20412LM238	20x4.5	5x5, 5x5.5	2.375
HRPR20412SM238	20x4.5	5x4.5, 5x4.75	2.375

HOT ROD STYLE TRIM RING



TRIM RING	ITEM ID
14-Inch Smooth	3005-14
14-Inch Ribbed	3006-14
15-Inch Smooth	3005-15
15-Inch Ribbed	3005-15
16-Inch Smooth	3005-16
16-Inch Ribbed	3005-16
17-Inch Smooth	3005-17
17-Inch Ribbed	3005-17

HOT ROD STEEL & SOLID ACCESSORIES



#5006 Rubber Valve Stem w/Chrome Sleeve

Standard Inside-Knob Caps 8 1/4" Back Diameter



#2005 '40 Baby Moon



#2006 '40 Standard V8 Moon



#200 '40 Deluxe Cap Stainless



#2008 '41 Ford Cap



#2032G '41 - '47 Chevrolet Cap




#2009 '42 Ford Cap




#2010 '46 Ford Cap



#2011 '47 Ford Cap



#2011P Plain no script



#2030G '47 - '53 Chevrolet Cap

SOLID



- Solid Bolt Patterns: 5 x 4-1/2 and 5 x 4-3/4 multi
- Custom powder coating available - See colors pg. 61
- Accessories sold separately- See pg. 66



PRIMERED

ITEM ID	SIZE	BOLT PATTERN	BS
SDPR145SM314	14x5	5x4.5, 5x4.75	3.25
SDPR146SM400	14x6	5x4.5, 5x4.75	4.00
SDPR147SM400	14x7	5x4.5, 5x4.75	4.00
SDPR155SM314	15x5	5x4.5, 5x4.75	3.25
SDPR156SM400	15x6	5x4.5, 5x4.75	4.00
SDPR157SM414	15x7	5x4.5, 5x4.75	4.25
SDPR158SM412	15x8	5x4.5, 5x4.75	4.50
SDPR1510SM500	15x10	5x4.5, 5x4.75	5.00
SDPR1512SM500	15x12	5x4.5, 5x4.75	5.00
SDPR1514SM500	15x14	5x4.5, 5x4.75	5.00

O.E. STYLE FORD-GM

- Primed or Chrome
- Available Bolt Patterns: 5 x 4 1/2, 5 x 4 3/4, 5 x 5, 5 x 5 1/2
- Wheel cover requiring nibs do not fit



CHROME

ITEM ID	SIZE	BOLT PATTERN	BS
OECR145SF300	14x5	5x4.5	3.000
OECR145SG300	14x5	5x4.75	3.000
OECR146SF400	14x6	5x4.5	4.000
OECR146SG400	14x6	5x4.75	4.000
OECR147SF400	14x7	5x4.5	4.000
OECR147SG414	14x7	5x4.75	4.250
OECR155LG300	15x5	5x5	3.000
OECR155SF300	15x5	5x4.5	3.000
OECR155SG300	15x5	5x4.75	3.000
OECR156LF400	15x6	5x5.5	4.000
OECR156LG334	15x6	5x5	3.750
OECR156SF400	15x6	5x4.5	4.000
OECR156SG400	15x6	5x4.75	4.000
OECR157LF400	15x7	5x5.5	4.000
OECR157LG414	15x7	5x5	4.250
OECR157SF414	15x7	5x4.5	4.250
OECR157SG414	15x7	5x4.75	4.250
OECR158LF400	15x8	5x5.5	4.000
OECR158LG414	15x8	5x5	4.250
OECR158SF414	15x8	5x4.5	4.250
OECR158SG414	15x8	5x4.75	4.250
OECR1510LF412	15x10	5x5.5	4.500
OECR1510LG412	15x10	5x5	4.500
OECR1510SF412	15x10	5x4.5	4.500
OECR1510SG412	15x10	5x4.75	4.500
OECR177SF458	17x7	5x4.5	4.625
OECR177SG458	17x7	5x4.75	4.625
OECR178SF414	17x8	5x4.5	4.250
OECR178SG414	17x8	5x4.75	4.250
OECR179SF518	17x9	5x4.5	5.125
OECR179SG518	17x9	5x4.75	5.125

PRIMERED

ITEM ID	SIZE	BOLT PATTERN	BS
OEPRI45SF300	14x5	5x4.5	3.000
OEPRI45SG300	14x6	5x4.75	3.000
OEPRI46SF400	14x6	5x4.5	4.000
OEPRI46SG400	14x6	5x4.75	4.000
OEPRI47SF400	14x7	5x4.5	4.000
OEPRI47SG414	14x7	5x4.75	4.250
OEPRI55LG300	15x5	5x5	4.500
OEPRI55SF300	15x5	5x4.5	3.000
OEPRI55SG300	15x5	5x4.75	3.000
OEPRI56LG334	15x6	5x5	3.750
OEPRI56SF334	15x6	5x4.5	3.750
OEPRI56SG334	15x6	5x4.75	3.750
OEPRI57LF400	15x7	5x4.5	4.000
OEPRI57LG414	15x7	5x5	4.250
OEPRI57SF414	15x7	5x4.5	4.250
OEPRI57SG414	15x7	5x4.75	4.250
OEPRI58LF400	15x8	5x5.5	4.000
OEPRI58LG414	15x8	5x5	4.250
OEPRI58SF414	15x8	5x4.5	4.250
OEPRI58SG414	15x8	5x4.75	4.250
OEPRI510LF412	15x10	5x5.5	4.500
OEPRI510LG412	15x10	5x5	4.500
OEPRI510SF412	15x10	5x4.5	4.500
OEPRI510SG412	15x10	5x4.75	4.500
OEPRI77SF458	17x7	5x4.5	4.625
OEPRI77SG458	17x7	5x4.75	4.625
OEPRI78SF414	17x8	5x4.5	4.250
OEPRI78SG414	17x8	5x4.75	4.250
OEPRI79SF518	17x9	5x4.5	5.125
OEPRI79SG518	17x9	5x4.75	5.125

SMOOTHIE

- Bolt patterns: 5 x 4-1/2 and 5 x 4-3/4 Multi, 5 x 5 and 5 x 5-1/2 Multi, 6 x 5-1/2 Single, 4 x 4-1/4 and 4 x 4-1/2 Multi
- Custom powder coating available- See colors pg. 67
- Call for info on 17" & 18" sizes - requires 7" cap

ACCESSORIES-PG. 68

PRIMERED

ITEM ID	SIZE	BOLT PATTERN	BS
SMPRI145SM300	14x5	5x4.5, 5x4.75	3.000
SMPRI1464L400	14x6	4x4.25, 4x4.5	4.000
SMPRI146SM400	14x6	5x4.5, 5x4.75	4.000
SMPRI1474L400	14x7	4x4.25, 4x4.5	4.000
SMPRI147SM400	14x7	5x4.5, 5x4.75	4.000
SMPRI148SM400	14x8	5x4.5, 5x4.75	4.000
SMPRI1556L300	15x5	6x5.5	3.000
SMPRI155LM300	15x5	5x5, 5x5.5	3.000
SMPRI155SM300	15x5	5x4.5, 5x4.75	3.000
SMPRI1564L358	15x6	4x4.25, 4x4.5	3.625
SMPRI1566L358	15x6	6x5.5	3.625
SMPRI156LM358	15x6	5x5, 5x5.5	3.625
SMPRI156SM358	15x6	5x4.5, 5x4.75	3.625
SMPRI1574L400	15x7	4x4.25, 4x4.5	4.000
SMPRI1576L400	15x7	6x5.5	4.000
SMPRI157LM400	15x7	5x5, 5x5.5	4.000
SMPRI157SM400	15x7	5x4.5, 5x4.75	4.000
SMPRI1584L400	15x8	4x4.25, 4x4.5	4.000
SMPRI1586L400	15x8	6x5.5	4.000
SMPRI158LM400	15x8	5x5, 5x5.5	4.000
SMPRI158SM400	15x8	5x4.5, 5x4.75	4.000
SMPRI15104L412	15x10	4x4.25, 4x4.5	4.500
SMPRI15106L412	15x10	6x5.5	4.500
SMPRI1510LM412	15x10	5x5, 5x5.5	4.500
SMPRI1510SM412	15x10	5x4.5, 5x4.75	4.500
SMPRI15126L414	15x12	6x5.5	4.250
SMPRI1512LM414	15x12	5x5, 5x5.5	4.250
SMPRI1512SM414	15x12	5x4.5, 5x4.75	4.250
SMPRI15146L414	15x14	6x5.5	4.250
SMPRI1514LM414	15x14	5x5, 5x5.5	4.250
SMPRI1514SM414	15x14	5x4.5, 5x4.75	4.250
SMPRI1666L400	16x6	6x5.5	4.000
SMPRI166LM400	16x6	5x5, 5x5.5	4.000
SMPRI166SM400	16x6	5x4.5, 5x4.75	4.000
SMPRI1676L400	16x7	6x5.5	4.000
SMPRI167LM400	16x7	5x5, 5x5.5	4.000
SMPRI167SM400	16x7	5x4.5, 5x4.75	4.000
SMPRI1686L400	16x8	6x5.5	4.000
SMPRI168LM400	16x8	5x5, 5x5.5	4.000
SMPRI168LM412	16x8	5x5, 5x5.5	4.500
SMPRI168LM500	16x8	5x5, 5x5.5	5.000
SMPRI168SM400	16x8	5x4.5, 5x4.75	4.000
SMPRI168SM412	16x8	5x4.5, 5x4.75	4.500
SMPRI168SM500	16x8	5x4.5, 5x4.75	5.000
SMPRI16106L500	16x10	6x5.5	5.000
SMPRI1610LM500	16x10	5x5, 5x5.5	5.000
SMPRI1610SM500	16x10	5x4.5, 5x4.75	5.000
SMPRI16126L500	16x12	6x5.5	5.000
SMPRI1612LM500	16x12	5x5, 5x5.5	5.000
SMPRI1612SM500	16x12	5x4.5, 5x4.75	5.000
SMPRI1776L412	17x7	6x5.5	4.500
SMPRI177LF412	17x7	5x5, 5x5.5	4.500
SMPRI177LG412	17x7	5x5	4.500
SMPRI177SM412	17x7	5x4.5, 5x4.75	4.500
SMPRI1786L412	17x8	6x5.5	4.500
SMPRI178LF412	17x8	6x5.5	4.500
SMPRI178LG412	17x8	5x5, 5x5.5	4.500
SMPRI178SM412	17x8	5x4.5, 5x4.75	4.500
SMPRI1796L514	17x9	6x5.5	5.250
SMPRI179LF514	17x9	5x5, 5x5.5	5.250
SMPRI179LG514	17x9	5x5	5.250
SMPRI179SM514	17x9	5x4.5, 5x4.75	5.250
SMPRI1876L414	18x7	6x5.5	4.250
SMPRI187LF414	18x7	5x5, 5x5.5	4.250
SMPRI187LG414	18x7	5x5, 5x5.5	4.250



PRIMERED

ITEM ID	SIZE	BOLT PATTERN	BS
SMPRI187SM414	18x7	5x4.5, 5x4.75	4.250
SMPRI1886L412	18x8	6x5.5	4.500
SMPRI188LF412	18x8	5x5, 5x5.5	4.500
SMPRI188LG412	18x8	5x5, 5x5.5	4.500
SMPRI188SM412	18x8	5x4.5, 5x4.75	4.500

CHROME OUTER/BARE CENTER

ITEM ID	SIZE	BOLT PATTERN	BS
SMCB145SM300	14x5	5x4.5, 5x4.75	3.000
SMCB1464L400	14x6	4x4.25, 4x4.5	4.000
SMCB146SM400	14x6	5x4.5, 5x4.75	4.000
SMCB1474L400	14x7	4x4.25, 4x4.5	4.000
SMCB147SM400	14x7	5x4.5, 5x4.75	4.000
SMCB148SM400	14x8	5x4.5, 5x4.75	4.000
SMCB155SM300	15x5	5x4.5, 5x4.75	3.000
SMCB1566L358	15x6	6x5.5	3.625
SMCB156LM358	15x6	5x5, 5x5.5	3.625
SMCB156SM358	15x6	5x4.5, 5x4.75	3.625
SMCB1574L400	15x7	4x4.25, 4x4.5	4.000
SMCB1576L400	15x7	6x5.5	4.000
SMCB157LM400	15x7	5x5, 5x5.5	4.000
SMCB157SM400	15x7	5x4.5, 5x4.75	4.000
SMCB1584L412	15x8	4x4.25, 4x4.5	4.500
SMCB1586L400	15x8	6x5.5	4.000
SMCB158LM400	15x8	5x5, 5x5.5	4.000
SMCB158SM400	15x8	5x4.5, 5x4.75	4.000
SMCB15104L412	15x10	4x4.25, 4x4.5	4.500
SMCB15106L412	15x10	6x5.5	4.500
SMCB1510LM412	15x10	5x5, 5x5.5	4.500
SMCB1510SM412	15x10	5x4.5, 5x4.75	4.500
SMCB15126L414	15x12	6x5.5	4.250
SMCB1512LM414	15x12	5x5, 5x5.5	4.250
SMCB1512SM414	15x12	5x4.5, 5x4.75	4.250
SMCB15146L414	15x14	6x5.5	4.250
SMCB1514LM414	15x14	5x5, 5x5.5	4.250
SMCB1514SM414	15x14	5x4.5, 5x4.75	4.250
SMCB1666L400	16x6	6x5.5	4.000
SMCB166LM400	16x6	5x5, 5x5.5	4.000
SMCB166SM400	16x6	5x4.5, 5x4.75	4.000
SMCB1676L400	16x7	6x5.5	4.000
SMCB167LM400	16x7	5x5, 5x5.5	4.000
SMCB167SM400	16x7	5x4.5, 5x4.75	4.000
SMCB1686L400	16x8	6x5.5	4.000
SMCB168LM400	16x8	5x5, 5x5.5	4.000
SMCB168LM412	16x8	5x5, 5x5.5	4.500
SMCB168LM500	16x8	5x5, 5x5.5	5.000
SMCB168SM400	16x8	5x4.5, 5x4.75	4.000
SMCB168SM412	16x8	5x4.5, 5x4.75	4.500
SMCB16106L500	16x10	6x5.5	5.000
SMCB1610LM500	16x10	5x5, 5x5.5	5.000
SMCB1610SM500	16x10	5x4.5, 5x4.75	5.000
SMCB1776L412	17x7	6x5.5	4.500
SMCB177LG412	17x7	5x5, 5x5.5	4.500
SMCB177SM412	17x7	5x4.5, 5x4.75	4.500
SMCB1786L412	17x8	6x5.5	4.500
SMCB178SM500	16x8	5x4.5, 5x4.75	5.000
SMCB16106L500	16x10	6x5.5	5.000
SMCB1610LM500	16x10	5x5, 5x5.5	5.000
SMCB1610SM500	16x10	5x4.5, 5x4.75	5.000
SMCB1776L412	17x7	6x5.5	4.500
SMCB177LG412	17x7	5x5, 5x5.5	4.500
SMCB177SM412	17x8	5x4.5, 5x4.75	4.500
SMCB1786L412	17x8	6x5.5	4.500
SMCB178LG412	17x8	5x5	4.500
SMCB178SM412	17x8	5x4.5, 5x4.75	4.500

SMOOTHIE

CHROME OUTER/BARE CENTER

ITEM ID	SIZE	BOLT PATTERN	BS
SMCB1796L514	17x9	6x5.5	5.250
SMCB179LG514	17x9	5x5	5.250
SMCB179SM514	17x9	5x4.5, 5x4.75	5.250
SMCB1876L414	18x7	6x5.5	4.250
SMCB187LG414	18x7	5x5	4.250
SMCB187SM414	18x7	5x4.5, 5x4.75	4.250
SMCB1886L412	18x8	5x5	4.500
SMCB188LG412	18x8	5x5	4.500
SMCB188SM412	18x8	5x4.5, 5x4.75	4.500

CHROME

ITEM ID	SIZE	BOLT PATTERN	BS
SMCR145SM300	14x5	5x4.5, 5x4.75	3.000
SMCR1464L400	14x6	4x4.25, 4x4.5	4.000
SMCR146SM400	14x6	5x4.5, 5x4.75	4.000
SMCR1474L400	14x7	4x4.25, 4x4.5	4.000
SMCR147SM400	14x7	5x4.5, 5x4.75	4.000
SMCR148SM400	14x8	5x4.5, 5x4.75	4.000
SMCR1556L300	15x5	6x5.5	3.000
SMCR155LM300	15x5	5x5, 5x5.5	3.000
SMCR155SM300	15x5	5x4.5, 5x4.75	3.000
SMCR1566L358	15x6	6x5.5	3.625
SMCR156LM358	15x6	5x5, 5x5.5	3.625
SMCR156SM358	15x6	5x4.5, 5x4.75	3.625
SMCR1574L400	15x7	4x4.25, 4x4.5	4.000
SMCR1576L400	15x7	6x5.5	4.000
SMCR157LM400	15x7	5x5, 5x5.5	4.000
SMCR157SM400	15x7	5x4.5, 5x4.75	4.000
SMCR1584L400	15x8	4x4.25, 4x4.5	4.000
SMCR1586L400	15x8	6x5.5	4.000
SMCR158LM400	15x8	5x5, 5x5.5	4.000
SMCR158SM400	15x8	5x4.5, 5x4.75	4.000
SMCR15104L412	15x10	4x4.25, 4x4.5	4.500
SMCR15106L412	15x10	6x5.5	4.500
SMCR1510LM412	15x10	5x5, 5x5.5	4.500
SMCR1510SM412	15x10	5x4.5, 5x4.75	4.500
SMCR15126L414	15x12	6x5.5	4.250

8-LUG



- 8 x 6 1/2 Bolt pattern
- Powder coated satin black

ITEM ID	SIZE	BOLT PATTERN	BS
8LPB1668L400	16x6	Satin Black	4
8LPB1678L400	16x7	Satin Black	4
8LPB1688L400	16x8	Satin Black	4
8LPB16108L500	16x10	Satin Black	5
8LCR1668L400	16x6	Chrome	4
8LCR1678L400	16x7	Chrome	4
8LCR1688L400	16x8	Chrome	4
8LCR16108L500	16x10	Chrome	5

6-LUG



- Primered or custom powdercoat available See colors Pg. 67
- 6x5.5 Bolt pattern
- Wheel cover requiring nibs do not fit

ITEM ID	SIZE	BOLT PATTERN	BS
OEPR1556L300	15x5	Primer	3
OEPR1566L334	15x6	Primer	3.75
OEPR1576L414	15x7	Primer	4.25
OEPR1586L414	15x8	Primer	4.25
OEPR15106L412	15x10	Primer	4.5

ACCESSORIES-PG. 68

CHROME

ITEM ID	SIZE	BOLT PATTERN	BS
SMCR1512LM414	15x12	5x5, 5x5.5	4.250
SMCR1512SM414	15x12	5x4.5, 5x4.75	4.250
SMCR15146L414	15x14	6x5.5	4.250
SMCR1514LM414	15x14	5x5, 5x5.5	4.250
SMCR1514SM414	15x14	5x4.5, 5x4.75	4.250
SMCR1666L400	16x6	6x5.5	4.000
SMCR166LM400	16x6	5x5, 5x5.5	4.000
SMCR166SM400	16x6	5x4.5, 5x4.75	4.000
SMCR1676L400	16x7	6x5.5	4.000
SMCR167LM400	16x7	5x5, 5x5.5	4.000
SMCR167SM400	16x7	5x4.5, 5x4.75	4.000
SMCR1686L400	16x8	6x5.5	4.000
SMCR168LM400	16x8	5x5, 5x5.5	4.000
SMCR168LM412	16x8	5x5, 5x5.5	4.500
SMCR168LM500	16x8	5x5, 5x5.5	5.000
SMCR168SM400	16x8	5x4.5, 5x4.75	4.000
SMCR168SM412	16x8	5x4.5, 5x4.75	4.500
SMCR168SM500	16x8	5x4.5, 5x4.75	5.000
SMCR16106L500	16x10	6x5.5	5.000
SMCR1610LM500	16x10	5x5, 5x5.5	5.000
SMCR1610SM500	16x10	5x4.5, 5x4.75	5.000
SMCR1776L412	17x7	6x5.5	4.500
SMCR177LG412	17x7	5x5	4.500
SMCR177SM412	17x8	5x4.5, 5x4.75	4.500
SMCR1786L412	17x8	6x5.5	4.500
SMCR178LG412	17x8	5x5, 5x5.5	4.500
SMCR178SM412	17x8	5x4.5, 5x4.75	4.500
SMCR1796L514	17x9	6x5.5	5.250
SMCR179LG514	17x9	5x5, 5x5.5	5.250
SMCR179SM514	17x9	5x4.5, 5x4.75	5.250
SMCR1876L414	18x7	6x5.5	4.250
SMCR187LG414	18x7	5x5	4.250
SMCR187SM414	18x7	5x4.5, 5x4.75	4.250
SMCR1886L412	18x8	6x5.5	4.500
SMCR188LG412	18x8	5x5	4.500
SMCR188SM412	18x8	5x4.5, 5x4.75	4.500

ACCESS

CRAGAR



1967 Chevrolet Chevelle SS Wheels: Cragar S/S Front: 15x4.5 Rear: 15x8 Tires: Front: BFG 640-15 Rear: Pro Trac 275/60-15

S/S WHEEL

The Cragar S/S wheel was introduced in 1964 and was an instant classic for hot rods, muscle cars and drag cars. We proud to offer the Series 61C wheels, which features a direct drilled bolt pattern, and a great selection of sizes. The chrome finish and iconic five-spoke design looks great on just about anything!

ITEM ID	SIZE	BOLT PATTERN	BACK SPACE
007061CGSS15412SF200	15x4.5	5x4.5	2"
007061CGSS15412SG200	15x4.5	5x4.75	2"
007061CGSS156S338	15x6	5x4	3.375"
007061CGSS156SF314	15x6	5x4.5	3.25"
007061CGSS156SG314	15x6	5x4.75	3.25"
007061CGSS156LG314	15x6	5x5	3.25"
007061CGSS157SF400	15x7	5x4.5	4"
007061CGSS157SG400	15x7	5x4.75	4"
007061CGSS157LG400	15x7	5x5	4"
007061CGSS157LF400	15x7	5x5.5	4"
007061CGSS158SF414	15x8	5x4.5	4.25"
007061CGSS158SG400	15x8	5x4.75	4"
007061CGSS158SG414	15x8	5x4.75	4.25"
007061CGSS158LG414	15x8	5x5	4.25"
007061CGSS158LF414	15x8	5x5.5	4.25"
007061CGSS1510SF414	15x10	5x4.5	4.25"
007061CGSS1510SG414	15x10	5x4.75	4.25"
007061CGSS1510LG414	15x10	5x5	4.25"
007061CGSS1510LF414	15x10	5x5.5	4.25"
007061CGSS1512SF412	15x12	5x4.5	4.5"
007061CGSS1512SG412	15x12	5x4.75	4.5"
007061CGSS1512LG412	15x12	5x5	4.5"
007061CGSS1514SF412	15x14	5x4.5	4.5"
007061CGSS1514SG412	15x14	5x4.75	4.5"
007061CGSS177SF334	17x7	5x4.5	3.75"
007061CGSS177SG334	17x7	5x4.75	3.75"
007061CGSS1776L400	17x7	6x5.5	4"
007061CGSS178SF312	17x8	5x4.5	3.5"
007061CGSS178SF412	17x8	5x4.5	4.5"
007061CGSS178SG312	17x8	5x4.75	3.5"
007061CGSS178SG412	17x8	5x4.75	4.5"
007061CGSS1786L500	17x8	6x5.5	5"
007061CGSS179SF412	17x9	5x4.5	4.5"
007061CGSS179SF512	17x9	5x4.5	5.5"
007061CGSS179SG412	17x9	5x4.75	4.5"
007061CGSS179SG512	17x9	5x4.75	5.5"
007061CGSS1796L512	17x9	6x5.5	5.5"



SHOP NOW!
Scan Code With
Phone Camera



CORVETTE ORIGINAL STYLE

- Extensively researched with help from NCRS judges
- Correct fin width, angle & window openings
- Hardware interchangeable with Kelsey Hayes originals
- Each set includes wheels, lug nuts, center caps & hardware



SHOP NOW!
Scan Code With
Phone Camera



1963-67 CORVETTE

ITEM ID	SIZE	YEAR	DESCRIPTION
22763	15x6	1963-1964	Direct-Bolt Knockoff (set of 4)
22963	15x6	1963-1934	Original Style Knockoff (set of 4)
22765	15x6	1965	Direct-Bolt Knockoff (set of 4)
22965	15x6	1965	Original Style Knockoff (set of 4)
22766	15x6	1966	Direct-Bolt Knockoff (set of 4)
22966	15x6	1966	Original Style Knockoff (set of 4)
22967	15x6	1966	Direct-Bolt Knockoff (set of 4)

NEED PARTS FOR YOUR 1953-1996 CORVETTE?

Look to Paragon
FOR THE HIGHEST QUALITY



FOLLOW US



@PARAGONCORVETTE



CALL OUR CORVETTE EXPERTS OR VISIT OUR WEBSITE
800-882-4688 PARAGONCORVETTE.COM
THE FINEST PARTS FOR YOUR 1953-1996 CORVETTE. CONTACT US FOR YOUR FREE CATALOG TODAY.

CADILLAC WIRE



- Rear wheel drive only
- 48 Stainless Steel Spokes
- Single bolt pattern: 5 x 5
- Tubeless

1940-76 CADILLACS

ITEM ID	SIZE	YEAR	BOLT PTN	BS
CAD5653D	15x6	1957-79	5x5	3.00
CAD565334D	15x6	1940-56	5x5	3.75



ROADSTER WIRE WHEELS™

ACCESSORIES

Standard 6" Back Diameter Caps



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#1035R
Cadillac Wire Cap



#C1302B
7/16" Open-end
Lug Nut

PACKARD WIRE



- 52 stainless steel spokes
- Single bolt pattern 5 x 5
- Accessories sold separately

ITEM ID	SIZE	BOLT PATTERN	BS
PAC565358D	15x6	5x5	3.625
PAC665358D	16x6	5x5	3.625

SHOP NOW!
Scan Code With
Phone Camera



ACCESSORIES

Standard 6-1/2" Back Diameter Caps



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#2028R
Packard Wire Cap



#C1304B
1/2" Open-end
Lug Nut

CHEVY/FORD WIRE



- Bolt Pattern: 5 x 4-1/2, 5 x 4-3/4, 5 x 5 multi-lug
- 56 Stainless Steel Spokes
- Tubeless

ITEM ID	SIZE	BOLT PATTERN	BS
CHE464343D	14x6	5x4.5, 5x4.75, 5x5	3.0
CHE564343D	15x6	5x4.5, 5x4.75, 5x5	3.0
CHE57434312D	15x7	5x4.5, 5x4.75, 5x5	3.5
CHE664343D	16x6	5x4.5, 5x4.75, 5x5	3.0

ACCESSORIES

Standard 6" Back Diameter Caps



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#1021R
Chevrolet Wire 3 Bar
Spinner Cap



#C1302B
7/16" Open-end
Lug Nut



#1040R
Ford Wire
3-Bar Spinner Cap



#1038Chromer
Plain 3 Bar
Spinner Cap



#C1304B
1/2" Open-end
Lug Nut

VINTAGE



- Bolt Pattern: 5 x 4-1/2, 5 x 4-3/4 and 5 x 5 Multi Lug
- Lip-Laced (requires tube) allows for deep 3.5" backspace which can often help clear tight fender skirts
- 56 Stainless Steel Spokes
- 3.15" Hub Opening

ITEM ID	SIZE	BOLT PATTERN	BS
VIN45TM312D	14x5	5x4.5, 5x4.75, 5x5	3.5
VIN55TM312D	15x5	5x4.5, 5x4.75, 5x5	3.5


Vintage Wires and all other lip laced wire wheels require tubes. We recommend radial tubes. See page 79.

ACCESSORIES


Standard 6" Back Diameter Caps



#1021R
Chevrolet Wire 3 Bar
Spinner Cap



#1038chromer
Plain 3 Bar
Spinner Cap



#1040R
Ford Wire
3-Bar Spinner Cap



#1036R3B
Buick Wire
3 Bar Spinner Cap

THUNDERBIRD WIRE



- Lip laced Tube-Type
- Fits '55-'68 Thunderbirds
- 56 stainless steel spokes
- Single Bolt Pattern 5 x 4-1/2


ITEM ID	SIZE	YEAR	BOLT PATTERN	BS
TB4512412312D	14x5.5	1958-1963	5x4.5	3.50
TB45412314D	14x5	1957	5x4.5	3.25
TB55412314D	15x5	1955-1956	5x4.5	3.25
TB56412312D	15x6	1965-1967 Front	5x4.5	3.50
TB564124D	15x6	1964 and 1965-1967 Rear	5x4.5	4.00

ACCESSORIES

Standard 6" Back Diameter Caps



#1038blackr
Black T-Bird
Cap



#1038bluer
Blue T-Bird
Cap



#1038redr
Red T-Bird
Cap



#1038chromer
Plain 3 Bar
Spinner Cap



#1038greenr
Green T-Bird
Cap

CHRYSLER WIRE



- 56 Stainless Steel Spokes
- Tubeless
- Bolt patterns: 5 x 4-1/2 or 5 x 5-1/2
- Rear wheel drive only
- Fits many '33 - '66 Chrysler, Imperial, Dodge, and Plymouth
- 5 x 5-1/2 for Imperial

ITEM ID	SIZE	BOLT PATTERN	BS
CHR464123D	14x6	5x4.5	3
CHR564123D	15x6	5x4.5	3
CHR565123D	15x6	5x5.5	3

ACCESSORIES

Standard 6-1/2" Back Diameter Caps



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#1037R
Chrysler Wire Cap



#C1304B
1/2" Open-end
Lug Nut

BUICK WIRE



- Single bolt pattern 5 x 5
- 56 Stainless Steel spokes
- Tubeless

ITEM ID	SIZE	BOLT PATTERN	BS
BUI565212D	15x6	5x5	2.5
BUI665212D	16x6	5x5	2.5

ACCESSORIES

Standard 6" Back Diameter Caps



#529C
Shorty Rubber
Valve Stem
w/Chrome Sleeve



#1036R3B
Buick Wire
3 Bar Spinner Cap



#1036RM
Buick Smooth
Cap

BUICK SKYLARK WIRE



- Original 40 Spoke Design with guide pin hole
- Stainless Steel Spokes
- Bolt Pattern: 5 x 5
- Tubeless

ITEM ID	SIZE	BOLT PATTERN	BS
SKY565300R	15x6	5x5	3

ACCESSORIES



#5006
Rubber Valve Stem
w/Chrome Sleeve



#1036
\$64
Skylark Wire Cap



#5022
Skylark Wire Lug
Bolts

MODEL A WHEELS



ROADSTER
WIRE WHEELS™

AVAILABLE
IN PRIMER
OR
POWDER
COAT!

- Made in the USA
- 19" & 21" Available
- 21" is Knife edge
- Tube Type
- Roadster Wire Brand

- Made in Brazil
- 19" & 21" Available
- Tube Type

ACCESSORIES



#91302
19" Cap



#913021
21" Cap

ADJUSTABLE SPOKE

ITEM ID	SIZE	BOLT PATTERN	FINISH
91017ADJ	19x3	5x5.5	Primered
91018ADJ	21x3	5x5.5	Primered

WELDED SPOKE

ITEM ID	SIZE	BOLT PATTERN	FINISH
91017	19x3	5x5.5	Primered
91018	21x3	5x5.5	Primered



WIRE
WHEELS



SHOP NOW!
Scan Code With
Phone Camera

Dayton Wire Wheel's spline-drive wheels are a replica of the Rudge spline-drive wire wheel found on many vintage British and Italian sports cars. Dayton's design, however, incorporates a variety of improvements such as forged hubs (vs. stamped steel) and their exclusive Perma-True™ technology. The end result is better vehicle handling, smoother ride and longer wheel life.

CAR	PART #	SIZE	SPOKES	FINISH	TUBE- LESS
AUSTIN-HEALEY					
100/4	D450CTT	15x4	48	CHROME	no
	D450PTT	15x4	48	PAINTED	no
100/6	D450CTT	15x4	48	CHROME	no
	D450PTT	15x4	48	PAINTED	no
	D459CTT	15x5	72	CHROME	no
3000	D452CTT	15x4.5	60	CHROME	no
	D452PTT	15x4.5	60	PAINTED	no
Sprite	D458CTL	13x4.5	60	CHROME	yes
	D458PTT	13x4.5	60	PAINTED	no
JAGUAR					
XK120,XK140,XK150	D456BCTT	16x5	60	CHROME	no
	D456BPTT	16x5	60	PAINTED	no
E-Type I,3.8 Saloon	D455CTL	15x5	72	CHROME	yes
	D455CTT	15x5	72	CHROME	no
	D455PTT	15x5	72	PAINTED	no
E-Type II	D472CTL	15x5	72	CHROME	yes
	D472CTT	15x5	72	CHROME	no
	D472PTT	15x5	72	PAINTED	no
Mk I & II,S,420	D455CTL	15x5	72	CHROME	yes
	D455CTT	15x5	72	CHROME	no
	D455PTT	15x5	72	PAINTED	no



CAR	PART #	SIZE	SPOKES	FINISH	TUBE- LESS
MG					
TD,TF	D450CTT	15x4	48	CHROME	no
	D450PTT	15x4	48	PAINTED	no
A	D450CTT	15x4	48	CHROME	no
	D452CTT	15x4.5	60	CHROME	no
	D452PTT	15x4.5	60	PAINTED	no
B	D461CTL	14x5	60	CHROME	yes
	D461PTT	14x5	60	PAINTED	no
	D457FCTL	15x5	72	CHROME	yes
C	D457FCTL	15x5	72	CHROME	yes
	D458CTL	13x4.5	60	CHROME	yes
	D458PTT	13x4.5	60	PAINTED	no
TRIUMPH					
TR-2,TR-3	D450CTT	15x4	48	CHROME	no
	D450PTT	15x4	48	PAINTED	no
TR-3, TR-3A	D452CTT	15x4.5	60	CHROME	no
	D452PTT	15x4.5	60	PAINTED	no
	D457FCTL	15x5	72	CHROME	yes
TR-4,TR4A	D452CTT	15x4.5	60	CHROME	no
	D452PTT	15x4.5	60	PAINTED	no
	D457FCTL	15x5	72	CHROME	yes
TR-250, TR-6	D457CCTL	15x6	72	CHROME	yes
	D457CPTT	15x6	72	PAINTED	no

VINTAGE
RIMS



LOCK RING
STYLE RIMS

- Mill Rolled to Firestone Profile and Specifications
- Available in 16-29 inch rim diameters
- Available in 3-1/2 and 4 inch rim widths

HEAVY LOCK RING RIM 4MM

ITEM #	SIZE
RLR01	17" (3-3/16)
RLR02	18" (3-3/16)
RLR03	19" (3-3/16)
RLR04	20" (3-3/16)
RLR05	21" (3-3/16)
RLR06	22" (3-3/16)
RLR07	23" (3-3/16)
RLR08	24" (3-3/16)
RLR09	25" (3-3/16)
RLR10	26" (3-3/16)
RLR11	27" (3-3/16)
RLR12	17" (3-3/4)
RLR13	18" (3-3/4)
RLR14	19" (3-3/4)
RLR15	20" (3-3/4)
RLR16	21" (3-3/4)
RLR17	22" (3-3/4)
RLR18	23" (3-3/4)
RLR19	24" (3-3/4)
RLR20	25" (3-3/4)
RLR21	26" (3-3/4)
RLR22	27" (3-3/4)

HEAVY LOCK RING 4MM

ITEM #	SIZE
LR12	17"
LR13	18"
LR14	19"
LR15	20"
LR16	21"
LR17	22"
LR18	23"
LR19	24"
LR20	25"
LR21	26"
LR22	27"



ROLLED
DROP CENTER

- Available in 16-28 inch rim diameters
- Perfect for motorcycle or auto restorations

ITEM #	ITEM DESCRIPTION
92295	16X3 (R2)
92297	16X4.5 (R4)
92300	17X3 (R2)
92301	17X4 1/2 (R4)
92305	18X3 (R2)
92306	18X4 1/2 (R4)
92310	19X3 (R2)
923102	19X3 KNIFE EDGE (R2)
92311	19X4 1/2 (R4)
92315	20X3 (R2)
92316	20X4 1/2 (R4)
92320	21X3 (R2)
923201	21X2 5/8 (R2)
92322	21X4 1/2 (R4)
92325	22X3 (R2)
92326	22X4 1/2 (R4)
92330	23X3 (R2)
92331	23X4 1/2 (R4)
92335	24X3 (R2)
92336	24X4 1/2 (R4)
92340	25X3 (R2)
92341	25X4 1/2 (R4)
92345	26X3 (R2)
92346	26X4 1/2 (R4)
92350	27X3 (R2)
92351	27X4 1/2 (R4)
92355	28X3 (R2)
92356	28X4 1/2 (R4)
RRE02	18X2 1/2 (R2)
RRE03	18X3 1/4 (R3)
RRE04	18X3 3/4 (R4)
RRE05	19X2.78 (R1)
RRE06	19X2 1/2 (R2) MG
RRE07	19X3 1/4 (R3)
RRE08	19X3 3/4 (R4)
RRE09	20X2 1/2 (R2)
RRE10	20X3 1/2 (R3)
RRE11	20X3 3/4 (R4)
RRE12	21X2 1/2 (R2)
RRE13	21X3 1/4 (R3)
RRE14	21X3 3/4 (R4)
RRE15	23X2 1/2 (R2)
RRE16	23X3 1/4 (R3)
RRE17	23X3 3/4 (R4)
RRE18	17X2 1/2 (R2)
RRE19	17X3 1/4 (R3)
RRE20	17X3 3/4 (R4)
RRE21	21X4 (R3)
RRE22	17X4 (R3)



SPLIT RIM

- Available in 17-28 inch rim diameters

3MM SPLIT RIM PLAIN

ITEM #	ITEM DESCRIPTION
RSP28	17" 2.76
RSP02	18" 2.76
RSP03	19" 2.76
RSP05	21" 2.76
RSP06	22" 2.76
RSP07N	23" 2.50
RSP07	23" 2.76
RSP23	24" 2.76
RSP24	25" 2.76
RSP25	26" 2.76
RSP26	27" 2.76
RSP27	28" 2.76

4MM SPLIT RIM PLAIN

ITEM #	ITEM DESCRIPTION
RSP08	17" 2.83
RSP09	18" 2.83
RSP09W	18" 3.00
RSP10	19" 2.83
RSP10W	19" 3.00
RSP04	20" 3.00
RSP11	20" 2.83
RSP12	21" 2.83
RSP13	22" 2.83
RSP14	23" 2.83
RSP15	24" 2.83
RSP16	25" 2.83
RSP16W	25" 3.00
RSP17	26" 2.83
RSP17W	26" 3.00
RSP18	27" 2.83
RSP18W	27" 3.00
RSP19	28" 2.83

MODEL T
SPLIT RIM

- 21-inch Split Rims designed specifically for Ford Model T
- Complete with lugs and latch

ITEM #	ITEM DESCRIPTION
9199453	21X3 W/LUGS CAD-PLATED
RSP01	21X3 W/LUGS NON-CAD



CLINCHER

- Perfect for motorcycle or auto restorations
- Available in many popular standard and metric sizes

ITEM #	ITEM DESCRIPTION
RCL02	26X3 [20] (2.60) 2MM
RCL03	28X3 [22] (2.60) 3MM
RCL04	30X3 [24] (2.60) 3MM
RCL05	30X3 1/2 (2.91) 3MM W/O LUGS
RCL06	30X3 1/2 (2.91) 3MM W/LUGS
RCL07	710X90 [22.8] (2.91) 3MM
RCL08	760X90 [22.8] (2.91) 3MM
RCL09	810X90 [22.8] (2.91) 3MM
RCL10	815X105 [23.8] (3.47) 3MM
RCL12	820X120 [22.8] (3.82) 4MM
RCL11	875X105 [26.2] (3.47) 3MM
RCL13	880X120 [25.2] (3.82) 4MM
RCL14	895X135 [24.6] (4.29) 4MM
RCL15	935X135 [26.2] (4.29) 4MM
RCL28	36X4 [28] B/E Rim *Special Order Only*
RCL06P	30X3 1/2 B2 B/E (2.91) 3MM LUGS CADPLATE

MOTORCYCLE CLINCHER

ITEM #	ITEM DESCRIPTION
919953	26x3 Plain
919954	26x3 36 Spoke
919956	26x3 40 Spoke
919965	26x2 1/2 Plain
919966	26x2 1/2 40 Spoke
919950	28x3 Plain
919951	28x3 40 Spoke
919952	28x3 36 Spoke
919957	28x2 1/2 Plain
919958	28x2 1/2 36 Spoke
919959	28x2 1/2 40 Spoke
919961	28x2 1/4 Plain
919962	28x2 1/4 36 Spoke
919963	28x2 1/4 40 Spoke
919968	28x2 Plain
919969	28x2 36 Spoke
919970	28x2 40 Spoke
919850	385x20 40 Spoke



1932 Lincoln KB Sedan
Tires: Firestone Wide Whitewall 700-18
With Nickel Prong Valve Cap

VALVE STEM HARDWARE

Authentic valve hardware is available as original equipment for cars built before 1935. Our Vintage Tire Specialists will be glad to assist you with proper applications. Please ask for their advice.

ITEM #	DESCRIPTION
90300	Nickel Cap (11/8")
90400	Nickel Siding Cap (11/2")
90500	Nickel Cover (21/2")
90501	Reducer Nut
90550	Nickel Cover (23/8")
90551	Nickel Reducer Nut
90805	Early Brass Cover (2")
90806	Brass Locknut
90807	Nickel Locknut
90850	Michelin Nickel Cover (21/2")
90875	Michelin Brass Cover (21/2")
90900	Nickel Prong Valve Cap



SHOP NOW!
Scan Code With
Phone Camera

FOR WOOD WHEELS

FOR WIRE WHEELS

Approx. 1930-1934

Approx. 1928-1929

Approx. 1920-1933 Wood Wheels

HARTFORD TUBES

We strongly recommend that all your vintage tires be equipped with new tubes and flaps or rimstrips.

SHOP NOW!
Scan Code With
Phone Camera



ITEM #	TIRE SIZE APPLICATION	VALVE STEM INFO		
		Place	Name	Type
50223	10x350-4 (Jumbo Junior)	Center	TR87	BMS
84995	250-4	Offset	TR87	BMS
50225	14x6 & 145/70-6	Center	TR87	BMS
84999	600-6 (A6) (A6)	Offset	TR13	RS
84500	350/400-8 (A8)	Offset	TR87	BMS
85000	480/400-8 (A8)	Offset	TR13	RS
85025	520/560-8 (B8)	Offset	TR13	RS
50227	300/350-10	Center	TR87	BMS
85040	480/500-10	Offset	TR87	BMS
517799	750-10	Offset	TR15	RS
85042	145R10 Radial (ER10)	Offset	TR13	RS
51781	275/300-12	Center	TR87	BMS
85050	400/480-12 (D12)	Offset	TR13	RS
85100	520/560-12 (F12)	Offset	TR13	RS
85112	125R12 Radial Michelin (12C13)	Offset	TR13	RS
85125	145/165 & 500/600R13 Radial (ER12/13)	Offset	TR13	RS
85324	155/205R13 Radial Michelin (13F)	Offset	TR13	RS
85150	560/590R13 Radial (FR13/14)	Offset	TR13	RS
85140	185/205R13/15 Radial (GR13/15)	Offset	TR13	RS
85325	155/165R14 Radial Michelin (14D13)	Offset	TR13	RS
85335	185/205R14 Radial Michelin (14F13)	Offset	TR13	RS
85370	225/235R14/15 Radial (MR14/15)	Offset	TR13	RS
85355	400-15	Offset	TR15	RS
85360	125/135R15 Radial Michelin (15CB13)	Offset	TR13	RS
85361	145/175R15 Radial Michelin (15E13)	Offset	TR13	RS
85363	155/175R15 Radial (FR15)	Offset	TR13	RS
85364	185/195R15 Radial Michelin (15F13)	Offset	TR13	RS
85365	195/215R15 Radial (KR14/15)	Offset	TR13	RS
62241	700/750-15/16 Truck	Center	TR75A	BMS
85480	20x2	Center	TR13	RS
85500	325/350-16	Center	TR6	MS
85610	500/510-16	Center	TR4	MS
85801	650/700-16 (K16)	Offset	TR13	RS
71026	750/900-16	Center	TR440	BMS
62236	890/900-16	Offset	TR15	RS
85640	165/185R16/R400 Radial (GR16)	Offset	TR13	RS
85366	550/700R16 Radial (KR16)	Offset	TR15	RS
85372	700/825R16 Radial (MR16)	Offset	TR13	RS
85373	700/825R16 Radial (MR16)	Offset	TR15	RS
86155	225/250-17	Center	TR4	MS
86201	450/600-17/18 & 15/16x45 Michelin (17/18 ERET)	Offset	TR13	RS
86115	525/550-17/18 (C17/18)	Offset	TR127	NS
86105	525/550-17/18 (C17/18)	Offset	TR13	RS
86100	525/550-17/18 (C17/18)	Offset	TR15	RS
86260	700/750-17/18 (F17/18)	Offset	TR15	RS
86255	700/750-17/18 (F17/18)	Center	TR440	BMS
86120	525/550R17/18 Radial HD (CR17/18)	Offset	TR11	MS
86122	525/550R17/18 Radial HD (CR17/18)	Offset	TR150	RS
86123	525/550R17/18 (C17/18)	Offset	TR135	RS
86267	325/385-18	Center	TR4	MS
86271	400/425-17/18	Center	TR4	MS
86275	400/450-18/19	Offset	TR13	RS
86190	450/550-18/19 Michelin (18/19 CDRET)	Offset	TR13	RS
86195	525/550-18/19 HD	Offset	TR13	RS
86582	600/700-18/19 HD	Offset	TR13	RS
86276	400/450-18/19	Center	TR13	RS
862797	250/275-19	Center	TR6	MS
862799	275/300-19	Center	TR4	MS
86280	325/350-19	Center	TR4	MS
86285	350/400-19 & 385-20	Center	TR4	MS
86425	475/500/550-19 (BR19) RADIAL	Center	TR127	NS
86400	475/500/550-19 (BR19) RADIAL	Center	TR135	RS
86583	475/500/550-19 (BR19) RADIAL	Offset	TR135	RS
86585	475/500/550-19 (BR19) RADIAL	Center	TR13	RS
86430	500/600R19 Radial HD (BR19)	Offset	TR11	MS
86431	500/600R19 Radial HD (BR19)	Center	TR150	RS
86755	600/700-19/20 (F19/20)	Offset	TR13	RS
86600	600/700-19/20 (F19/20)	Center	TR150	RS
86756	600/700-19/20 (F19/20)	Offset	TR150	RS
86700	600/700-19/20 (F19/20)	Center	TR440	BMS
86703	600/700R19/20 Radial HD (FR19/20)	Offset	TR11	MS
86704	600/700R19/20 Radial HD (FR19/20)	Center	TR150	RS
76123	600/650-20 HD	Offset	TR11	MS
86775	900-R20	Center	TR443	BMS

ITEM #	TIRE SIZE APPLICATION	VALVE STEM INFO		
		Place	Name	Type
86840	1100/1200R20 Radial	Center	TR444	BMS
86744	750/825R20 Radial Truck	Center	TR440	BMS
87010	440/475-20/21 (AR21) RADIAL	Center	TR127	NS
86586	440/475-20/21 (AR21) RADIAL	Offset	TR13	RS
87000	440/475-20/21 (AR21) RADIAL	Center	TR135	RS
87015	440/475-20/21 (AR21) RADIAL	Center	TR383	BS
87030	500/550-20/21 HD	Offset	TR13	RS
87040	600/700-20/21 HD	Offset	TR13	RS
86820	600/700-20/21 Michelin (19/20 HRET)	Offset	TR13	RS
86900	275/300-21 & 26/28x3	Center	TR4	MS
86286	325/350-21	Center	TR4	MS
78966	550/600-21 HD	Offset	TR11	MS
87035	550/600R21 Radial HD (CR21)	Center	TR11	MS
87036	550/600R21 Radial HD (CR21)	Center	TR150	RS
87045	1000-22	Center	TR444	BMS
87090	28x3 Cycle	Center	TR4	MS
87125	28x3 Auto	Center	TR383	BS
87100	28x3 Auto	Center	TR135	RS
87500	32/33/34/35x4.5/5 (Large Combo)	Center	TR135	RS
87526	32/33/34/35x4.5/5 HD (Large Combo)	Center	TR2	BS
87150	28x2.5 & 300/325-23	Center	TR4	MS
87200	30x3 1/2	Center	TR135	RS
87220	30x3 1/2	Center	TR383	BS
87400	31/32/33/34x4 (Small Combo)	Center	TR135	RS
87427	31/32/33/34x4 HD (Small Combo)	Center	TR2	BS
87300	30x3	Center	TR135	RS
87310	30x3	Center	TR383	BS
87700	38x7 & 40x8	Center	TR135	RS
87702	38x7 & 40x8	Center	TR383	BS
874251	36x4/4.5 HD	Center	TR135	RS
874254	36x4/4.5 HD	Center	TR2	BS
87705	41x4 1/2 HD	Center	TR383	BS
87505	710x90 HD	Center	TR135	RS
87339	710x90 Michelin	Center	TR2030	BS
87050	760x90 Michelin	Center	TR2030	BS
87506	815x105 HD	Center	TR135	RS
87502	875x105 HD	Center	TR135	RS
87504	820x120 HD	Center	TR135	RS
87060	820x120 Michelin	Center	TR2030	BS
87061	820x120 Michelin	Center	TR135	RS
87503	880x120 HD	Center	TR135	RS
87508	880x120	Center	TR2	BS
87351	880x120 Michelin	Center	TR383	BS
87501	895x135 HD	Center	TR135	RS
86279	19-1 3/4 23-9 Michelin	Offset	TR13	RS
63281	28-1.75/2.0 Bicycle/Moto	Center	TR13	RS
87701	40x8	Center	TR150	RS

HD - heavy duty
Center - valve stem centered on tube
RS - rubber stem
MS - metal stem
NS - nickel stem
BS - brass stem
BMS - bent metal stem
Offset - valve stem at 1 o'clock angle on tube
center offset 5°

FLAPS

ITEM #	TIRE SIZE APPLICATION
87890	15x7 RADIAL
88050	16x7
88000	16x7 OFFSET HOLE
88100	17x5
88151	17R7 RADIAL
88200	18x5
88250	18x7
88300	19x5
88400	20X5
88450	20x7
88500	21x5
88600	22x5
88605	22x8
88700	23x4 1/2
88800	24x4
88850	24x8
88900	25x4
89000	26x5
89100	27x4

FLAPS



TUBES

COVERS FOR RUBBER STEMS



RIMSTRIPS

ITEM #	TIRE SIZE APPLICATION
89205	16"
89200	17"-21"
89210	26" BICYCLE

Fits rubber stem tubes! These finely polished brass or nickel dust covers are designed to apply directly over rubber stem tubes with a TR-135 stem.
Brass Item # 90901
Nickel Item # 90902. Size: 2 1/2".

FIND TIRES FAST

BIAS PLY TIRES		
Tire Size	Brand	Page
440-10	Excelsior	40
480-10	BF Goodrich	34
750-10	STA	48
125-12	BF Goodrich	34
300-12	Coker Classic	53
400-12	Coker Classic	53
400-12	Firestone Dirt Track	32
500-12	Firestone Dirt Track	32
520-12	BF Goodrich	34
560/600-12	BF Goodrich	34
16/53-13	Michelin	39
20/53-13	Michelin	39
520-13	Firestone	26
520-13	Premium Sport	44
560-13	Firestone	26
560-13S	BF Goodrich	34
590-13S	BF Goodrich	34
600-13	BF Goodrich	34
640-13S	BF Goodrich	34
640/700-13	Vredestein	22
650-13	Coker Classic	43
650-13	US Royal	42
700-13	Firestone	26
725-13S	BF Goodrich	34
17/58-14	Michelin	39
500/520-14	Excelsior	40
520-14	Premium Sport	44
560-14	BF Goodrich	34
695-14	BF Goodrich	34
695-14	BF Goodrich	34
695-14	US Royal	42
700-14	BF Goodrich	34
735-14	BF Goodrich	34
750-14	BF Goodrich	34
750-14	Coker Classic	43
750-14	Firestone	26
750-14	US Royal	42
775-14	BF Goodrich	34
775-14	Firestone	26
775-14	US Royal	42
800-14	BF Goodrich	35
825-14	BF Goodrich	35
850-14	BF Goodrich	35
855-14	BF Goodrich	35
885-14	BF Goodrich	35
900-14	BF Goodrich	35
950-14	BF Goodrich	35
D70-14	Firestone Wide Oval	31
E70-14	Firestone Wide Oval	31
E78-14	Coker Classic	43
F70-14	Firestone Wide Oval	31
F78-14	Coker Classic	43



G70-14	Firestone Wide Oval	31
G78-14	BF Goodrich	35
G78-14	Coker Classic	43
H78-14	Coker Classic	43
1000-15	Firestone Dragster	33
1100-15	Firestone Dirt Track	32
1200-15	Firestone Indy	33
14/31-15	Firestone Dirt Track	32
18/60-15	Michelin	39
215/75-15	Pro-Trac	44
23/59-15	Michelin	39
23/62-15	Michelin	39
235/60-15	Pro-Trac	44
26/61-15	Michelin	39
275/60-15	Pro-Trac	44
29/61-15	Michelin	39
375/60-15	Pro-Trac	44
400/425-15	Excelsior	40
445/50-15	Pro-Trac	44
500-15	BF Goodrich	35
500-15	Firestone Dirt Track	32
515/45-15	Pro-Trac	44
550-15	Excelsior	40
560-15	Coker Classic	43
560-15	Firestone	26
560-15	Pro-Trac	44
560-15	US Royal	42
590-15	BF Goodrich	35
600-15	BF Goodrich	35
640-15	BF Goodrich	35
640-15	Excelsior	40
640-15	Firestone	26
670-15	BF Goodrich	35
670-15	Coker Classic	43
670-15	Excelsior	40
670-15	Firestone	26
670-15	STA	46

670-15	US Royal	42
700-15	BF Goodrich	35
700-15	Firestone	27
700-15	STA	46
710-15	BF Goodrich	35
710-15	Firestone	27
710-15	US Royal	42
760-15	BF Goodrich	36
760-15	BF Goodrich	36
760-15	Coker Classic	43
775-15	BF Goodrich	36
775-15	Firestone	27
800-15	Coker Classic	43
815-15	BF Goodrich	36
820-15	BF Goodrich	36
820-15	Firestone	27
820-15	Firestone	27
820-15	US Royal	42
840/820-15	US Royal	42
855-15	BF Goodrich	36
890-15	Firestone	27
900-15	BF Goodrich	36
920-15	Firestone Indy	33
E70-15	Firestone Wide Oval	31
F60-15	Firestone Wide Oval	31
F70-15	Firestone Wide Oval	31
G70-15	Firestone Wide Oval	31
G78-15	Coker Classic	43
H78-15	Coker Classic	43
H78-15	STA	46
J78-15	BF Goodrich	36
L78-15	BF Goodrich	36
L78-15	Coker Classic	43
L78-15	STA	46
N50-15	Pro-Trac	44
1000-16	Firestone Dragster	33
1050-16	STA	48
1100-16	Firestone Dirt Track	32
14/31-16	Firestone Dirt Track	32
450/475-16	Firestone	28
500-16	Firestone Dirt Track	32
500-16	Indian Script	51
500-16	Treadwell Trackmaster	51
500/525-16	Excelsior	40
500/525-16	Firestone	28
525-16	Deka	46
550-16	Excelsior	40
550-16	Firestone	28
600-16	BF Goodrich	36
600-16	Coker Classic	43
600-16	Excelsior	40
600-16	Firestone	28
600/650-16	Michelin	39
650-16	BF Goodrich	37

650-16	Excelsior	40
650-16	Firestone	28
650-16	Firestone	28
650-16	Garfield	43
650-16	STA	46
650-16	Tornel	47
670-16	Firestone	28
700-16	BF Goodrich	37
700-16	Firestone	28
700-16	Tornel	47
750-16	BF Goodrich	37
750-16	Firestone	28
750-16	STA	47
760-16	Firestone Indy	33
820-16	Firestone Dirt Track	32
825-16	BF Goodrich	37
890-16	Firestone Dirt Track	32
900-16	Firestone NDT	48
900-16	STA	47
10-16.5	STA	47
12-16.5	STA	47
1200-16.5	STA	47
800-16.5	STA	47
875x16.5	STA	47
950-16.5	STA	47
200-17	Metzeler	52
400/425-17	Excelsior	40
450-17	Excelsior	40
475/500-17	Excelsior	40
500-17	Firestone Dirt Track	32
525/550-17	Excelsior	40
525/550-17	Firestone	28
600/650-17	Ensign	45
600/650-17	Deka	47
600/650-17	Firestone	28
650/700-17	Michelin	39
700-17	Firestone	30
750-17	BF Goodrich	37
750-17	BF Goodrich	37
750-17	Firestone	30
750-17	STA	47
750-17	Tornel	47
820-17	Firestone Dirt Track	32
8 x 17.5	STA	47
800-17.5	STA	47
1100-18	Military Dukw	48
450/500-18	Excelsior	41
475/500-18	Excelsior	40
475/525-18	Michelin	39
500-18	Firestone Dirt Track	32
525/550-18	Excelsior	40
550-18	BF Goodrich	37
550-18	Excelsior	41
550-18	Firestone	28
550-18	Michelin	39
600/650-18	Deka	47
600/650-18	Excelsior	41
600/650-18	Michelin	39
650-18	Firestone	30
700-18	Excelsior	41
700-18	Firestone	30
700-18	STA	47
750-18	Deka	47
750-18	Firestone	30
750-18	STA	47
800-18	Firestone Indy	33
820-18	Firestone Dirt Track	32
28X4.75-19	Snow Bird	45
350/400-19	Excelsior	40
400/450-19	Michelin	39
450-19	Ensign	45
450-19	Excelsior	41
475/500-19	BF Goodrich	37
475/500-19	Excelsior	40
475/500-19	Firestone	28
475/500-19	Michelin	39
475/500-19	Universal	45
500-19	Excelsior	41
500-19	Firestone Dirt Track	32
525/550-19	Excelsior	40
525/600-19	Michelin	39
550-19	BF Goodrich	37
550/600-19	Excelsior	41
550/600-19	Firestone	28
600/650-19	BF Goodrich	37
650-19	Excelsior	41
650-19	Firestone	30
700-19	Firestone	30
750-19	Firestone	30
820-19	Firestone Dirt Track	32

1100-20	STA NDCC	48
1400-20	STA NDCC	48
300-20	Coker Classic	52
475/500-20	Excelsior	40
475/500-20	Firestone	28
550-20	BF Goodrich	37
600-20	BF Goodrich	37
600-20	Firestone Indy	33
600-20	Firestone Truck	47
600-20	US Royal	42
600-20	US Royal	42
600-20 (30x5)	Firestone	28
650-20	Firestone	28
650/700-20	Excelsior	41
650/700-20	Michelin	39
700-20	BF Goodrich	49
700-20	Firestone	30
750-20	Firestone NDT	48
750-20	STA	47
820x120	Excelsior	40
825-20	STA NDT	48
880x120	Excelsior	41
900-20	STA NDT	48
275-21	Firestone	50
300-21	Firestone	50
440/450-21	BF Goodrich	37
440/450-21	Firestone	28
450/475-21	Excelsior	40
450/475-21	Universal	45
500/525-21	Excelsior	41
525-21	Excelsior	40
525-21	Firestone	28
550/560-21	Michelin	39
550/600-21	Excelsior	41
600-21	BF Goodrich	37
700-21	Excelsior	41
700-21	Firestone	30
700-21	Michelin	39
1000-22	STA	47
600-22	BF Goodrich	37
825-22	BF Goodrich	49
900-22	American Classic	47
440-23	Excelsior	40
500-23	Excelsior	40
500-24	BF Goodrich	37
500-24	Excelsior	40



RADIAL TIRES		
Tire Size	Brand	Page
145R10	Camac	25
145R10	Dunlop	24
165/70SR10	Dunlop	24
125R12	Michelin	18, 20
145/70R12	Michelin	18
145R13	Firestone F560	22
155/80R13	BF Goodrich	14
155/80R13	Travelstar	24
155HR13	Dunlop	24
155HR13	Michelin	18
165/80R13	BF Goodrich	14
165HR13	Dunlop	24
165HR13	Michelin	18
175/60R13	Michelin	20
175/65R13	Michelin	20
175/80R13	BF Goodrich	14
185/60R13	Michelin	20
185/70R13	BF Goodrich	14, 16
185/70R13	Dunlop	24
185/70VR13	Michelin	18
185/80R13	BF Goodrich	14
195/55R13	Avon	25
195/55R13	Michelin	20

195/70R13	BF Goodrich	14
205/60R13	Dunlop	24
205/60R13	BFG Radial T/A	17
205/60VR13	Vredestein	22
205/70VR13	Michelin	18
640SR13	Michelin	18, 20
650R13	American Classic	8
725R13	Michelin	18, 20
135SR14	Vredestein	22
145R14	Camac	25
145R14	Firestone F560	22
155R14	Firestone F560	22
165/60R14	Michelin	20
165/80R14	Dunlop	24
165HR14	Michelin	18
165HR14	Vredestein	22
175/60R14	Michelin	20
175/70R14	Travelstar	24
175/75R14	Travelstar	24
175/80R14	Dunlop	24
175HR14	Michelin	18
175HR14	Vredestein	22
185/55R14	Michelin	20
185/60R14	Michelin	20
185/70R14	Dunlop	24
185/70R14	BF Goodrich	14
185/75R14	Travelstar	24
185/80R14	Dunlop	24
185HR14	Vredestein	22
185R14	Michelin	18, 20
185R14	Phoenix	25
195/70R14	Dunlop	24
195/70VR14	Vredestein	22
195/75R14	Travelstar	24
195/75R14	Coker Classic	13
205/70R14	Dunlop	24
205/70R14	BF Goodrich	14, 16, 17
205/70VR14	Michelin	18
205/70VR14	Vredestein	22
205/75R14	Travelstar	24
205/75R14	American Classic	10
205/75R14	BF Goodrich	14, 16
205/75R14	Coker Classic	13
205VR14	Michelin	18
215/60R14	BFG Radial T/A	17
215/70R14	BF Goodrich	14, 16, 17
215/70VR14	Michelin	18
215/75R14	Travelstar	24
215/75R14	American Classic	10
215/75R14	Coker Classic	13
225/60R14	BFG Radial T/A	17
225/70R14	BF Goodrich	14, 16, 17
225/75R14	Coker Classic	13
235/60R14	BFG Radial T/A	17
235/75R14	American Classic	10
245/50R14	BF Goodrich	16
245/60R14	BFG Radial T/A	17
265/50R14	BF Goodrich	16
750R14	American Classic	8
800R14	American Classic	8
FR70-14	Firestone Wide Oval	7
GR70-14	Firestone Wide Oval	7
125R15	Firestone F560	22
125R15	Michelin	18, 20
135R15	Firestone F560	22
135SR15	Michelin	18
145R15	BF GOODRICH	14
145R15	Firestone F560	22
145R15	Michelin	18
155/80R15	Dunlop	24
155/80R15	BFG Radial T/A	17
155HR15	Michelin	19
155R15	Firestone F560	22
155SR15	Vredestein	22
165/80R15	Dunlop	24
165HR15	Michelin	19
165HR15	Vredestein	22
165R15	American Classic	10
165R15	BF Goodrich	14
165R15	Coker Classic	13
165R15	Firestone F560	22
165SR15	Michelin	19, 20
175/70HR15	Vredestein	22
180HR15	Michelin	19, 20
185/55R15	Michelin	20
185/55R15	American Classic	10
185/65R15	BF Goodrich	15, 16
185/70R15	Dunlop	24
185/70HR15	Vredestein	22
185/70R15	BF Goodrich	14

FIND TIRES FAST

185/70VR15	Michelin	19
185/80VR15	Dunlop	24
185VR15	Avon	25
185VR15	Dunlop	24
185HR15	Michelin	19, 20
185HR15	Vredestein	22
185R15	Coker Classic	13
185VR15	Michelin	19
195/50R15	Michelin	20
195/55R15	Michelin	20
195/60R15	Michelin	20
195/60R15	Vredestein	22
195/60R15	BFG Radial T/A	17
195/75R15	American Classic	10
205/55ZR15	Vredestein	22
205/60R15	Michelin	20
205/60R15	American Classic	10
205/60R15	BFG Radial T/A	17
205/65R15	BF Goodrich	15, 16
205/70R15	Dunlop	24
205/70R15	American Classic	10
205/70VR15	Michelin	19
205/70VR15	Vredestein	22
205/75R15	Travelstar	24
205/75R15	American Classic	10
205/75R15	BF Goodrich	14, 16
205/75R15	Coker Classic	13
205VR15	Avon	25
215/50ZR15	Vredestein	22
215/60R15	Dunlop	24
215/60R15	American Classic	10
215/60R15	BFG Radial T/A	17
215/65R15	BF Goodrich	15, 16
215/70R15	Travelstar	24
215/70R15	Dunlop	24
215/70R15	BF Goodrich	14, 16, 17
215/70VR15	Michelin	19
215/70VR15	Vredestein	22
215/75R15	American Classic	10
215/75R15	BF Goodrich	14
215/75R15	Coker Classic	13
215/75R15	BFG K02	49
225/60R15	BF Goodrich	14, 17
225/70R15	BF Goodrich	14, 16, 17
225/70VR15	Michelin	19
225/75R15	Travelstar	24
225/75R15	American Classic	10
225/75R15	BF Goodrich	14
225/75R15	Coker Classic	13
235/60R15	Michelin	20
235/60R15	BFG Radial T/A	17
235/70R15	Avon	25
235/70HR15	Michelin	19, 20
235/70R15	BF Goodrich	14, 16
235/75R15	Travelstar	24
235/75R15	American Classic	10
235/75R15	BF Goodrich	14
235/75R15	Coker Classic	13
235/75R15	BFG K02	49
245/60R15	BFG Radial T/A	17
255/45VR15	Michelin	19
255/60R15	BFG Radial T/A	17
255/70R15	BF Goodrich	14, 17
275/60R15	BFG Radial T/A	15
285/70R15	BF Goodrich	15
295/50R15	BFG Radial T/A	17
560R15	American Classic	8
670R15	American Classic	8
710R15	American Classic	8
760R15	American Classic	8
800R15	American Classic	9
820R15	American Classic	9
820R15	Phoenix	25
ER70VR15	Dunlop	24
FR60-15	Firestone	7
FR70-15	Firestone	7
GR70-15	Firestone	7
LR78-15	Firestone 721	27
30x9.50R15	BFG K02	49
31x10.50R15	BFG K02	49
32x11.50R15	BFG K02	49
33x10.50R15	BFG K02	49
33x12.50R15	BFG K02	49
35x12.50R15	BFG K02	49

165HR16	Avon	25
185VR16	Avon	25
185HR16	Vredestein	22
185R16	Firestone	28
185R16	Michelin	19
195/50R16	BF Goodrich	15
205/55R16	American Classic	10
205/55ZR16	Michelin	21
205/60R16	American Classic	10
205R16	Michelin	20
205R16	Vredestein	22
215/55R16	American Classic	10
215/65R16	BF Goodrich	15, 16
215/65R16	BFG K02	49
215/70R16	American Classic	10
215/70R16	BFG K02	49
225/60R16	Travelstar	24
225/60R16	BF Goodrich	15, 16
225/70R16	BFG K02	49
225/75R16	BFG K02	49
235/60R16	American Classic	10
235/65R16	Avon	25
235/70R16	American Classic	10
235/70R16	BFG K02	49
235/85R16	BFG K02	49
245/45ZR16	Michelin	21
245/70R16	BFG K02	49
245/75R16	BFG K02	49
255/70R16	BFG K02	49
265/70R16	BFG K02	49
265/75R16	BFG K02	49
275/65R16	BF Goodrich	15
275/70R16	BFG K02	49
285/75R16	BFG K02	49
295/75R16	BFG K02	49
305/70R16	BFG K02	49
315/75R16	BFG K02	49
500R16	Excelsior	23
550R16	Coker Classic	13
550R16	Coker Classic	13
550R16	Excelsior	23
550R16	Michelin	19
600R16	Coker Classic	13
600R16	Excelsior	23
600R16	Michelin	19
650R16	Coker Classic	13
650R16	Excelsior	23
670R16	Avon	25
700R16	Coker Classic	13
700R16	Excelsior	23
750R16	Coker Classic	13
750R16	Excelsior	23
205/50ZR17	Vredestein	22
225/55R17	BF Goodrich	15, 16
225/60R17	Travelstar	24
225/65R17	BFG K02	49
235/55R17	American Classic	10
235/80R17	BFG K02	49
245/65R17	BFG K02	49
245/70R17	BFG K02	49
245/75R17	BFG K02	49
255/40ZR17	Vredestein	22
255/65R17	BFG K02	49
550R17	Excelsior	23
600/650R17	Excelsior	23
700/750R17	Excelsior	23
33x12.50R17	BFG K02	49
34x10.50R17	BFG K02	49
35x12.50R17	BFG K02	49
37x12.50R17	BFG K02	49
550R18	Excelsior	23
600/650R18	Excelsior	23
700R18	Excelsior	23
33x12.50R18	BFG K02	49
34x12.50R18	BFG K02	49
35x12.50R18	BFG K02	49
475/500R19	American Classic	9
500R19	Excelsior	23
550R19	Excelsior	23
600R19	Excelsior	23
650R19	Excelsior	23
700R19	Excelsior	23
600R20	Excelsior	23
650/700R20	Excelsior	23

33x12.50R20	BFG K02	49
35x12.50R20	BFG K02	49
440/450R21	American Classic	9
550/600R21	Excelsior	23



METRIC RIM TIRES		
Tire Size	Brand	Page
130/140X40	Michelin	39
150/160X40	Michelin	39
12/13/14x45	Firestone	28
12x45	Michelin	39
13x45	Michelin	39
14x45	Michelin	39
15/16x45	Michelin	39
14/15/16X50	Firestone	28
710x90	Ensign	45
710x90	Excelsior	40
760x90	Ensign	45
760x90	Excelsior	40
810x90	Ensign	45
810x90	Excelsior	41
815x105	Ensign	45
815x105	Excelsior	40
875x105	Excelsior	41
820x120	Ensign	45
880x120	Ensign	45
730x130	Excelsior	40
895x135	Ensign	45
895x135	Excelsior	41



HIGH PRESSURE TIRES		
Tire Size	Brand	Page
28x3	Coker Classic	43
28x3	Excelsior	40
28X3	Firestone	30
30x3	Coker Classic	43
30x3	Excelsior	41
30x3	Firestone	30
30x3 1/2	Coker Classic	43
30x3 1/2	Excelsior	40
30x3 1/2	Firestone	30

30x3 1/2	Firestone	30
32x4	BF Goodrich	38
32x4	Firestone	30
33x4	BF Goodrich	38
33x4	Firestone	30
34x4	BF Goodrich	38
34x4	Firestone	30
36x4	BF Goodrich	38
36x4	Firestone	30
32x4 1/2	BF Goodrich	38
32x4 1/2	Firestone	30
33x4 1/2	BF Goodrich	38
33x4 1/2	Firestone	30
34x4 1/2	Firestone	30
36x4 1/2	BF Goodrich	38
36x4 1/2	Firestone	30
30x5	Hartford	45
33x5	BF Goodrich	38
33x5	Firestone	30
33x5	Firestone	30
34x5	BF Goodrich	38
35x5	BF Goodrich	38
35x5	Firestone	30
37x5	BF Goodrich	38
37x5	Ensign	30
36x6	BF Goodrich	37
38x7	BF Goodrich	37
40x8	BF Goodrich	37



MOTORCYCLE TIRES		
Tire Size	Brand	Page
24x2 1/4	Coker Classic	52
26x2 1/2	Coker Classic	52
26x2.50	Simplex	52
28x2 1/2	Coker Classic	52
28x2 1/2	Firestone	50
26x3	Coker Classic	52
26x3	Simplex	52
28x3	Coker Classic	52
28x3	Coker Classic	52
28x3	Firestone	50
28x3	Firestone	50
27x3.50	Simplex	52
10x350-4	Coker Classic	53
14-6	Coker Classic	53
600-6	Cushman	53
18x8.50-8	Coker Classic	53
400-8	Cushman	53
475-775	Coker Classic	53
475-775	Cushman	53
375-975	Coker Classic	53
300-10	Coker Classic	53
120-16	Deka	52
300-16	Goodyear	52
325-16	Firestone	50
325-16	Goodyear	52
350-16	Firestone	50
500-16	Beck	51
500-16	Coker Classic	51
500-16	Coker Classic	51
500-16	Firestone	50
500-16	Firestone	50
225-17	Firestone	50
250-17	Firestone	50
450-17	Firestone	50

325-18	Coker Classic	51
335x18	Coker Classic	52
350-18	Ensign	45
350-18	Firestone	50
350-18	Phoenix	51
360-18	Phoenix	51
385x18	Coker Classic	51
400-18	Beck	51
400-18	Coker Classic	51
400-18	Firestone	50
400-18	Indian Script	51
400-18	Phoenix	51
410-18	Phoenix	51
425/85-18	Phoenix	51
450-18	Beck	51
450-18	Coker Classic	51
450-18	Excelsior	40
450-18	Firestone	50
325-19	Ensign	45
325-19	Firestone	50
350-19	Ensign	45
350-19	Coker Classic	51
350-19	Deka	52
360-19	Phoenix	51
400-19	Ensign	45
400-19	Coker Classic	51
400-19	Firestone	50
410-19	Phoenix	51
300S20	Ensign	45
350-20	Simplex	52
385x20	Coker Classic	52
385x20	Firestone	50
275-21	Firestone	50
300-21	Firestone	50
300S21	Ensign	45



RACE TIRES		
Tire Size	Brand	Page
8.0/22.0-13	M&H Racemaster	56
8.0/22.0-13	M&H Racemaster	56
8.0/23.0-13	M&H Racemaster	56
8.0/23.0-13	M&H Racemaster	56
8.5/24.5-13	M&H Racemaster	56
8.5/26.0-13XT	M&H Racemaster	56
8.7/25.0-13 XT	M&H Racemaster	56
9.0/22.0-13	M&H Racemaster	56
9.0/22.0-13	M&H Racemaster	56
9.5/24.5-13	M&H Racemaster	56
9.5/24.5-13	M&H Racemaster	56
235/60-14	M&H Racemaster	57
800/850-14	M&H Racemaster	56
3.5/22-15	M&H Racemaster	56
3.6/24-15	M&H Racemaster	56
4.0/22.5-15	Phoenix	54
4.5/24.5-15	Phoenix	54
4.5/26-15	M&H Racemaster	56
4.5/26.0-15	Phoenix	54
4.5/27-15	M&H Racemaster	56
5.0/24-15	M&H Racemaster	56
5.0/24.0-15	Phoenix	54
6.0/26.0-15	M&H Racemaster	56
185/75R15	M&H Racemaster	57
215/65-15	M&H Racemaster	57

235/60-15	M&H Racemaster	57
235/60R15	M&H Racemaster	57
245/55R15	M&H Racemaster	57
26/10.5-15LT	M&H Racemaster	56
26/11.5-15LT	M&H Racemaster	56
26/8.50R15	M&H Racemaster	57
700/26.0-15	Phoenix	54
75/23.0-15	M&H Racemaster	56
8.5/23.0-15	M&H Racemaster	56
8.5/24.5-15	M&H Racemaster	56
8.5/26.0-15	M&H Racemaster	56
9.0/28.0-15	M&H Racemaster	56
9.0/30.0-15	M&H Racemaster	56
9.00/27.0-15	M&H Racemaster	56
9.00/28.5-15	Phoenix	54
9.00/30.0-15	Phoenix	54
900-15	M&H Racemaster	56
G60-15	M&H Racemaster	57
J60-15	M&H Racemaster	57
275/50-15	M&H Racemaster	57
275/50R15	M&H Racemaster	57
275/60-15	M&H Racemaster	57
275/60R15	M&H Racemaster	57
28/12.5-15LT	M&H Racemaster	56
N50-15	M&H Racemaster	57
10.0/26.0-15	M&H Racemaster	56
10.0/27.0-15	M&H Racemaster	56
10.5/28.0-15	M&H Racemaster	56
10.5/28.0-15	Phoenix	54
10.5/28.5-15	M&H Racemaster	56
10.5/28.5-15	Phoenix	54
10.5/29.5-15	Phoenix	54
10.5/30.5-15W	M&H Racemaster	56
10.5/31.0-15W	Phoenix	54
10.5/33.0-15W	Phoenix	54
11.5/28.5-15	Phoenix	54
11.5/29.5-15	Phoenix	54
11.5/29.5-15W	Phoenix	54
12.0/26.0-15	M&H Racemaster	56
12.0/29.0-15	M&H Racemaster	56
12.0/33.0-15	M&H Racemaster	56
12.2/31.25-15W	Phoenix	54
13.0/31.0-15	Phoenix	54
13.6/32.0-15	Phoenix	54
14.0/32.0-15	M&H Racemaster	56
14.0/32.0-15	Phoenix	54
14.0/32.0-15W	Phoenix	54
14.5/32.0-15	Phoenix	54
14.5/32.0-R15	Phoenix	54
315/60R15	M&H Racemaster	57
325/50R15	M&H Racemaster	57
390/45R15	M&H Racemaster	57
4.5/27-16	M&H Racemaster	56
5.0/26.0-16	M&H Racemaster	56
26/11.5-16LT	M&H Racemaster	56
275/55R16	M&H Racemaster	57
30/14.0-16LT	M&H Racemaster	56
30/14.5-15LT	M&H Racemaster	56
315/50R16	M&H Racemaster	57
4.5/26-17	M&H Racemaster	56
4.5/27.0-17	Phoenix	54
4.5/28-17	M&H Racemaster	56
4.5/28.0R17	M&H Racemaster	57
8.5/26.0-17	M&H Racemaster	56
185/55R17	M&H Racemaster	57
245/45R17	M&H Racemaster	57
26/8.50R17	M&H Racemaster	57
275/40R17	M&H Racemaster	57
275/50R17	M&H Racemaster	57
9.0/28.0-17	Phoenix	54
10.5/28.0-17	M&H Racemaster	56
10.5/28.0-17	Phoenix	54
325/45R17	M&H Racemaster	57
390/40R17	M&H Racemaster	57
4.0/26.6-18	M&H Racemaster	56
4.5/28-18	M&H Racemaster	56
5.0/26-18	M&H Racemaster	56
185/50R18	M&H Racemaster	57
245/40R18	M&H Racemaster	57
275/45R18	M&H Racemaster	57
10.5/28.0-18	M&H Racemaster	56
325/40R18	M&H Racemaster	57
345/35R18	M&H Racemaster	57
305/35R20	M&H Racemaster	57

ABOUT NOSTALGIA RADIALS

Our Nostalgia radial tires are very special tires, made in small production runs, hand-built for pure perfect appearance, optimum reliability, durability and an excellent ride. These tires are engineered, designed and manufactured from the start to be wide whitewall radials. Our quality standards for these radials is very high, so high that we absolutely do not ship any blemished tires. All are first line, first quality and guaranteed to be so too! We have established high standards for road force and balance values. Every Coker Classic, American Classic and BFGoodrich Silvertown tire is tested on a test wheel designed specifically for these standards. If the tire does not meet our high standards, it does not leave the factory. We have the absolute best warranty on our wide whitewall radials. We stand behind everything we sell. Our tires are guaranteed against defective workmanship and materials for the life of the tread!

NOTE ON TUBELESS (TL) AND TUBE-TYPE (TT) TIRES AND WHEELS

Most passenger car and light truck applications built after 1955 feature tubeless tires and wheels. Tubeless tires have specific bead seats which may or may not match to a tube-type wheel. Generally, you can run a tubeless tire on a tube-type wheel with a tube, however it may necessitate rim strips, sealants, or other accessories to do properly. Never run a tube-type tire without a tube. When in doubt, consult your installer to check if the fitment is proper and safe.

IMPORTANT - INSTALLING RADIAL TIRES ON RIMS

Radial tires are different in design and are manufactured differently than bias tires. Because of the radial sidewall flexing, a radial tire can put more stress on the rim flange area of rims. Due to this additional stress, rim fatigue or cracking could occur during normal use of radial tires on old original rims. This could happen because of common flexing, cyclic loading and cornering but also depends upon the miles and use of the vehicle. Make sure to inspect your rims regularly when using radial tires or bias tires on any rim.



IMPORTANT TIPS FOR THE CARE OF YOUR COLLECTOR TIRES

- 1** Always keep whitewall tires wrapped until you are ready to have them mounted. If storage is necessary, keep them in a cool, dry area and laid flat. Store them away from sunlight or any electric motors. Remember, ozone kills rubber!
- 2** **Black Rubber Stains Whitewall Rubber!** Our whitewall tires come wrapped in plastic. Once unwrapped, **DO NOT** let any part of the black rubber from one tire touch the white rubber of another as it will cause a permanent stain. If this occurs, permanent brown stains may appear in the whitewall which is not warranted against.
- 3** Due to the nature of wide whitewall tires we recommend that clip-on style weights **NOT** be placed on the whitewall side, otherwise they may leave imprints or even damage the beautiful whitewalls. It is extremely important that all tires only be mounted and balanced by trained tire service technicians.

- 4** Proper inflation is an important key to tire life. Always avoid under inflation. When in doubt, always check the tire manufacturer's recommended air pressure stamped into the sidewall of the tire. Check the air pressure of your tires on a regular basis.
- 5** Inspect your tires on a regular basis. Check both the sidewall and tread areas for cuts, abrasions, cracks or irregular wear. Replace old tires. Tires that are dry and hard are more likely to skid on slick surfaces. When replacing tires, always equip them with new tubes and flaps or rim strips.
- 6** Never mix tires of different size or construction on the same axle. Always avoid mixing radial and bias-ply tires on the same vehicle.
- 7** Use only top quality, name brand, non-bleach and non-silicone cleaners on whitewall tires. We recommend using our Wide White and Big Classic dressings and Detail Pro Whitewall Wipes often, see below.

ORDERING INSTRUCTIONS

Three easy ways to order:
• Call TOLL FREE, 1-800-959-1900
• Order Online at www.cokertire.com
• Fax your order or inquiry to (423) 756-5607
• 8am-8pm EST M-F / 8-12 noon EST Sat

MAILING ADDRESS:

Coker Tire Company
1317 Chestnut Street
Chattanooga, TN 37402
USA

MERCHANDISE RETURN ADDRESS:

(Please call for Return Authorization before returning merchandise)
Coker Tire Company
2101 Rossville Avenue
Chattanooga, TN 37408 USA

PAYMENT FOR ORDERS: Coker Tire accepts most major credit cards (VISA, MASTERCARD, DISCOVER, AMEX). Because of the unfortunate increase of credit card fraud, there are many new rules put forth by companies like American Express, Visa and MasterCard. These regulations often require more stringent procedures specifically relating to "ship to" addresses, other than the address where your charge card statement is sent. Please provide your Sales Representative with the exact address shown on your charge card statement and your billing phone number, as well as other verification information we will ask for when you are placing your order. We reserve the right to ship your merchandise to the address the credit card company has on file. Sorry, we do not ship C.O.D. For customers who want to pay by check, we recommend that you send a certified check or money order, or be willing to wait up to 21 days for your check to clear before shipment is initiated. Payment can also be accepted by wire transfer. You can ask your Sales Service Representative for this information. Some products have limited availability and all prices are subject to change without prior notice.

SALES TAXES & TIRE FEES: All merchandise shipped to or picked up in California, Pennsylvania, or Tennessee is subject to applicable sales taxes and tire fees. All merchandise delivered at swap meets, trade shows or car shows is subject to all applicable state and local taxes & fees.

TIRE WARRANTY: We want you to be pleased with your purchase! Our tires are guaranteed to be free from defects in workmanship and materials for the life of the tread (some exclusions apply). Adjustment is made on prorated basis (you pay for tread wear used). We are not responsible for tire and tube failure due to improper mounting, inflation, mechanical failure or improper alignment of the vehicle. Coker Tire does not offer any guarantee of fitment for any particular purpose and limits its liability to the purchase price of the item. All tires and tubes should be installed by properly trained individuals. Dimensions for tires listed are not scientifically measured and may vary depending on rim widths and inflation. NO returns on tires that have been mounted. All Warranty returns also require an RMA (Return Merchandise Authorization) number.

WHEEL WARRANTY: Coker Tire warrants chrome finished wheels and accessories to the original owner for the period of (15) months from date of purchase. Oxidation or corrosion of the finish due to improper care, and/or adverse weather or chemicals are not covered by this warranty. Wheels that have been mounted, painted or powder coated are considered used and cannot be returned. Please test fit the wheels before you mount or paint them. Wire wheels are warranted for a period of three (3) years from date of purchase against defects in materials and workmanship excluding the finish.

TIRE & WHEEL COMBINATIONS: Coker Tire provides a special value service of free mounting and balancing when you purchase both tires and wheels as a package from our company (some sizes excluded). It is very important to understand that once a tire and wheel are mounted, the status of these products has changed. Your credit card will be charged in full prior to mounting and balancing whether the product is shipped to you, picked up at our facility, or delivered to a show. All wheel manufacturers have a NO RETURN policy after a wheel has been mounted.

RETURNS: Our customer service toll free number is 1-800-999-TYRE (8973). Before returning an item, please call for an RMA (Return Merchandise Authorization) number. Write your RMA number on the label of the returned package. Without the RMA number, your package will not be routed to the Returns Department. Returned goods must be accompanied by a copy of your invoice. All returns are subject to a 10% restocking fee. Items returned after 30 days are subject to a 25% restocking fee. No returns after 90 days. Product must be returned in its original condition and packaging. NO returns on tires or wheels that have been mounted. We do not accept C.O.D. shipments on returned items.

DAMAGE CLAIMS: Always immediately inspect the contents of your shipment. Notify the shipping carrier if damage has occurred. (FedEx® phone number 1-800-463-3339) Boxed merchandise must be kept in the original shipping carton for inspection. DO NOT return damaged items to Coker Tire until inspected by the shipping carrier. The package must be inspected at the point of delivery. It is the responsibility of the carrier to deliver the merchandise in good condition. In the unlikely event that you receive a package that has been opened or damaged, make sure the driver notes this fact on their delivery sheet.

SHIPPING INSTRUCTIONS: All sales are FOB our warehouses in Tennessee and California. We ship most shipments by FedEx®. Prices listed in the catalog do not include shipping & handling charges. Shipping & handling charges will be added to your order. Our CSR will quote you the shipping and handling charges at the time of your order. All items shipped by motor freight will be shipped freight collect. Our policy is always to give you the best service and the best rate! If you have ordered products to be delivered freight free to a show near you, it is your responsibility to pick up your order as per agreement.

EXPORT CUSTOMERS: Coker Tire is not responsible for additional fees such as brokerage fees, taxes, customs or duties which may be collected at delivery.

HOURS: Our Sales Staff answers the toll free phones from 8AM until 8PM EST, 8-12 noon EST Saturday. The local hours you can visit our TN store are 8AM until 5PM EST. Closed Saturday & Sunday. Our CA store hours are 8AM until 5PM PST Monday thru Friday.

TIRE LABELING: The TREAD Act of 2000 requires that certain information be labeled on the sidewalls of a modern tire. Vintage car collectors desire their vehicles to have the most authentic look possible including "vintage look" tires. Thus, tires in the Coker Catalog with this notation are intended only for collectible motor vehicles, having a gross vehicle weight rating (GVWR) of 10,000 pounds or less, that were manufactured prior to 1976 and are therefore exempt from the labeling requirement.

*** NEW OLD STOCK:** These tires may have been manufactured ten or more years ago, but they have never been mounted or used. To the best of our knowledge, they have been stored in a warehouse environment and have not been subjected to ultraviolet light. These tires are no longer produced, and are only offered to provide your vehicle with original stock tires for appearance purposes. This stock may represent the only market source for these items at the present time. Accordingly, we offer no warranties on these products.

Prices and availability subject to change without notice. Some items may be special order sizes requiring extra delivery time.
Prices in this catalog do not include freight or applicable taxes or duties

BFGoodrich®, BFG® and stylized versions of these marks are the licensed proprietary property of B.F. Goodrich Company and Michelin North America, Inc.; Firestone®, Firestone Tires®, Gum-Dipped® and stylized versions of these marks are the licensed property of Firestone Tire & Rubber Company and BFS Brands, LLC; Michelin®, and stylized illustrations that include Bibendum (the Michelin Man) are the licensed property of Michelin North America, Inc.; Ford® is the licensed proprietary property of Ford Motor Company.

Racemaster® and stylized versions of this mark are the property of M&H Tire Company Inc. and Interco Tire Corporation and no claim of ownership is made herein; Vredestein® and any stylized versions of this mark are the property of Vredestein Branden B.V. Ltd. Liab. Co. Netherlands and no claim of ownership is made herein; Buick®, Cadillac®, Camaro®, Chevrolet®, Corvette®, Nova®, Oldsmobile®, and Pontiac® are the proprietary property of General Motors Corporation and no claim of ownership is made herein; Mustang®, Thunderbird®, T-bird® and stylized versions of these marks are the property of Ford Motor Company and no claim of ownership is made herein; Chrysler® and any stylized versions of this mark are the property of Chrysler Motors Corporation, Chrysler Corporation, Chrysler LLC, or Daimler-Chrysler Corporation and no claim of ownership is made herein; Cushman®, Cushman® Motor Scooters, and stylized versions of these marks are the property of Cushman Motor Works, Inc. and no claim of ownership is made herein; Packard® and any stylized versions of this mark are the property of Packard Automobile Classics, Inc. and no claim of ownership is made herein; NHRA® and any stylized versions of this mark are the property of the National Hot Rod Association and no claim of ownership is made herein.

Any trademarks, service marks, and other marks and indicators of source or origin that are displayed in this catalog are the proprietary property of the respective company, licensors, or vendors, as applicable. Such marks remain the property of their respective holders, and are used only to describe the products being provided under license, distribution or other agreement. No such marks may be used in connection with any other product or service, in any manner that is likely to cause confusion among consumers, or to disparage or discredit the owner of such mark. Except as otherwise noted, their use in no way indicates a relationship between Coker Tire Company and the holder of said mark.



Can't find what you're looking for? Want tires for your daily driver or off-road truck?
Need help sourcing tires for your build?

THE EXPERTS AT COKER TIRE ARE HERE TO HELP!

We carry thousands of tire and wheel fitments and are adding new ones constantly, so if you don't see what you are looking for in this catalog or on our website, just give us a call. Even if we don't have it, we'll help you find it!

Here are a few things we can help you with:

- Help source tires for your collector car, family car, modern vehicle, tractor, off-road truck even your race car! You can be assured if we don't manufacture it and it is available, we will find it. We have dozens of long-time relationships with all the top tier tire suppliers.
- Find wheels – steel wheels, aluminum wheels, O.E. replacement, resto-mod, off-road, we can help!
- Provide you with custom tire and wheel combinations to achieve a particular look or style. Our database of O.E. and custom fitments is extensive.
- Research a car's tire and wheel specifications even pre-WWII. Our extensive library of automotive reference

material includes information from the 1920's through the modern era.

- Disc brake conversion—we are a Wilwood disc brakes distributor and offer a full line of brake conversion kits for classic cars, muscle cars and classic trucks.
 - New Old Stock and Discontinued tires—we sometimes have access to vintage NOS tires, that are no longer being produced.
 - We can source authentic agricultural tires for your vintage tractor or farm implement.
- However, we cannot:**
- Advise you on whether you should modify your car or leave it stock.
 - Provide investment advice, we're car guys not bankers.
 - We do not buy or sell vehicles.

CALL US! 800-959-3800




Our tire and wheel experts can help you with wheel fitments. They can also help you with wooden wheels and custom wire wheels such as the "Buffalo" Style Wire Wheel.

TIRE & WHEEL COMBO

When you purchase a complete set of tires and wheels, our trained tire technicians will mount, nitrogen-fill and balance your tires for FREE! It's a \$100 value, and it saves you a lot of time and frustration. This complimentary service ensures that your tire and wheel combo is balanced properly. When they arrive at your doorstep, just bolt them on and hit the road!



FREE Mount & Balance
When you order Tires and Wheels Together

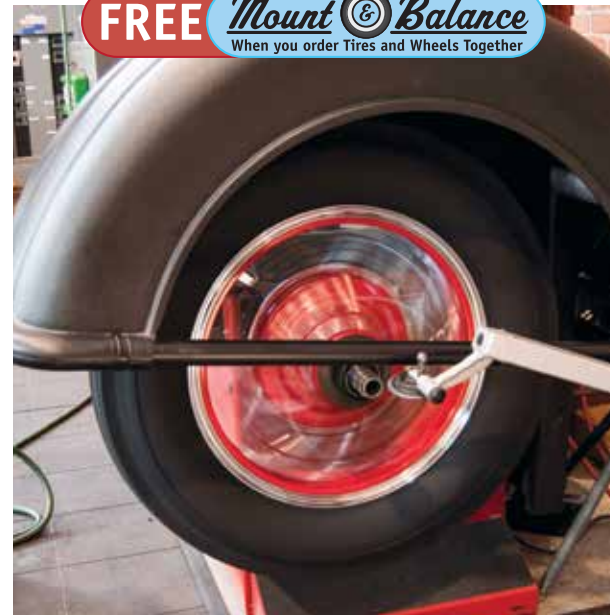

LIFE OF TREAD WARRANTY

Our tires are guaranteed to be free from defects in workmanship and materials for the life of the tread, some exclusions apply. Adjustment is made on a prorated basis (you pay for tread wear used). We are not responsible for tire and tube failure due to improper mounting, mechanical failure or improper alignment of the vehicle. Coker Tire does not offer any guarantee of fitment for any particular purpose and limits its liability to the purchase price of the item. All tires and tubes should be installed by properly trained individuals. Warranty returns also require an RMA number. Some exclusions apply, see page 81.



EXTENDED TIRE PROTECTION

Our Extended Tire Protection plan is a 5-year replacement program for tires that become unserviceable or damaged from a cut, snag, bruise, impact, sidewall damage, or puncture caused from a road hazard. We will pay for shipping (both ways) and repair or replace the damaged tire free of charge. Ask your Vintage Tire and Wheel Specialist for all the details and pricing on your tires.



EXTENDED WHEEL PROTECTION

Adding our Extended Wheel Protection plan gives you 5 years of coverage against damage to your wheels caused by impact, road debris, pothole or other road hazards. We will pay for shipping (both ways) and repair or replace the damaged wheel free of charge. Ask our Vintage Tire and Wheel Specialists how you can add this coverage plan to your order.



CONTACT US



CORPORATE HEADQUARTERS

Coker Tire's worldwide headquarters is located in the historic Southside in downtown Chattanooga, Tennessee. Walk-in customers are welcome. Orders can be picked up with phone-ahead (only) arrangements from our warehouse.

Sales and Order Center Hours
Monday - Friday 8a.m. - 8p.m. (EST)
Saturday 8a.m.-12noon (EST)
Local phone 423-265-6368
Toll Free 800-959-1900
Lobby Hours: 8 a.m. - 5 p.m. (EST)
Monday through Friday

1317 CHESTNUT STREET
CHATTANOOGA, TN 37402



EAST COAST DISTRIBUTION

Our East Coast Distribution Center is located in Chattanooga, Tennessee and provides more than 350,000 square feet of warehouse space for thousands of tires and wheels that are in stock and ready to ship.

Hours: 8 a.m. - 5 p.m. (EST)
Monday - Friday
Closed Saturday & Sunday
Local phone 423-265-6368

2101 ROSSVILLE AVENUE
CHATTANOOGA, TN 37408



WEST COAST MANUFACTURING & DISTRIBUTION


This location is a store and wheel manufacturing distribution facility, which allows us to deliver tires to our West Coast customers in a timely manner. Walk-in customers are welcome and will-call orders may be picked up at this facility with phone ahead (only) arrangements.

Hours: 8 a.m. - 5 p.m. (PST)
Monday - Friday
Toll Free 866-535-7139

14955 DON JULIAN RD
CITY OF INDUSTRY, CA 91746



GET EXTENDED
PROTECTION
SEE PAGE 87

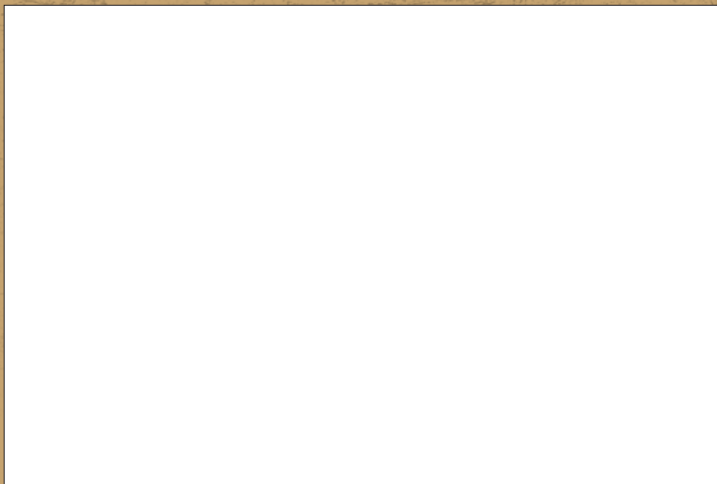

TIRE & WHEEL COMBOS!

Buy A Set Of 4 Tires & Wheels And Save—Plus Get Free
Mount, Nitrogen Inflation And Balance—
Over \$100 Value! See Page 87

We have a wide range of Authentic-Brand Products for that perfect combo!



ROADSTER
WIRE WHEELS



SHOP NOW!
Scan Code With
Phone Camera

SPEAK TO AN EXPERT **800-959-1600** SHOP ALL OF OUR BRANDS **COKERTIRE.COM**